

#1 Atari
Computer
Magazine

U.S.A. \$3.50
CANADA \$4.00

Antic®

The **ATARI®** Resource

MARCH 1985


VOLUME 3, NUMBER 11

ULTIMATE PRINTER GUIDE

AtariWriter Secrets
Customized Typefaces
Picture Printing
Color Printers Reviewed
Label Maker

Parallel Bus, Part 3
Microscreens

*Inside: 5 Type-in Programs
Includes 2 New Games*

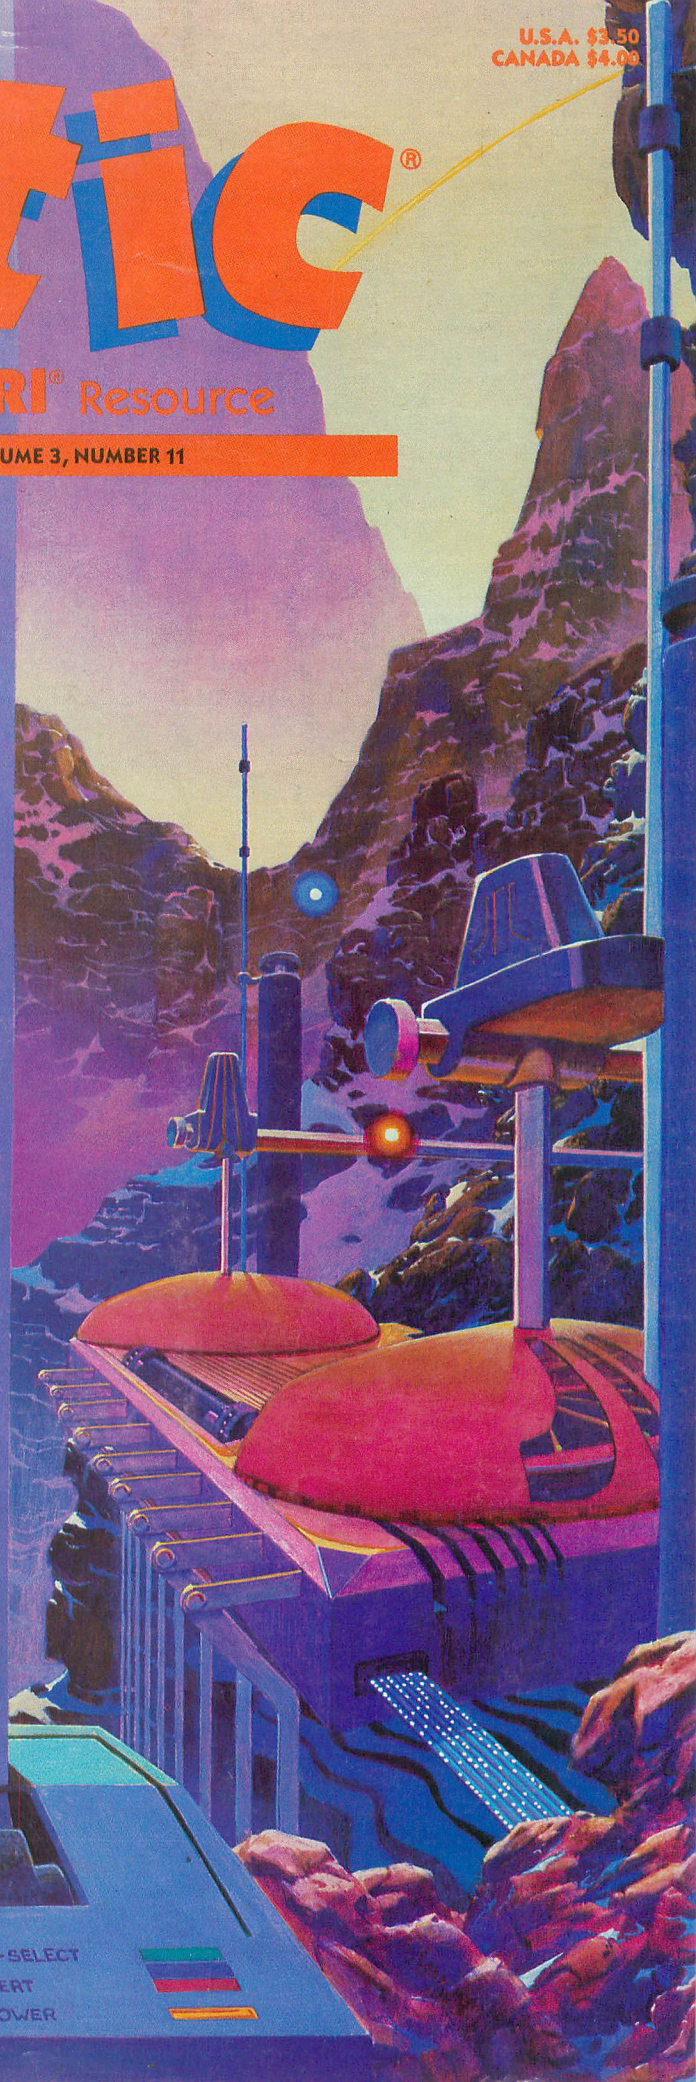


TOP-SELECT
LF
ALERT
POWER

Expand Your Atari
...With peripherals from **mpp**



MicroPrint Parallel Printer Interface

- Works with Atari, 400, 800, 600XL and 800XL
- Replaces Atari 850 Interface Module
- Compatible with all software
- 5-foot cable with Centronics plug (compatible with Epson, NEC, Prowriter, etc.)
- Connects to serial bus on computer
- 2 Year Warranty

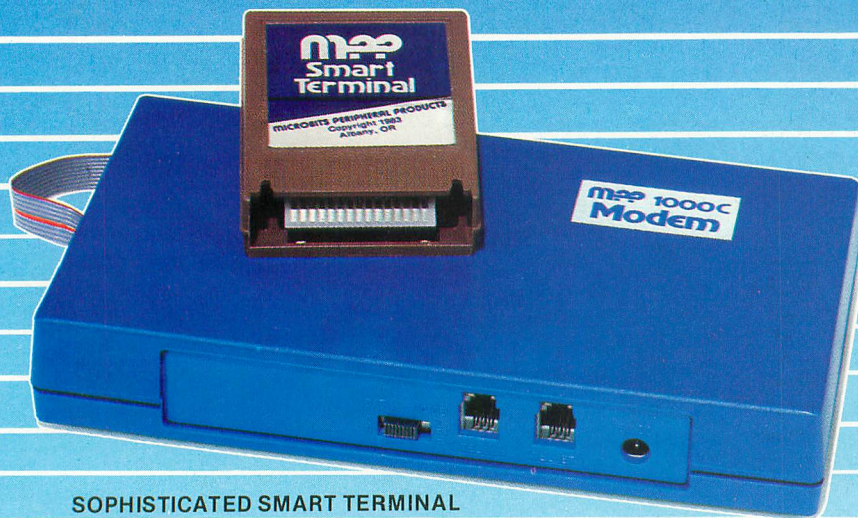

mpp-1000C Modem

- Auto Answer / Auto Dial
- Direct Connect to Phone Line
- No Atari 850 Interface Module Needed
- Includes AC Adapter / Power Supply
- Free CompuServe DemoPak™
- 1 Year Warranty
- Connects to Joystick Port
- Works on ALL Atari Computers

SOPHISTICATED SMART TERMINAL

SOFTWARE ON CARTRIDGE

FEATURES:

- Supports XMODEM Protocol
- ASCII / ATASCII Translation
- Allows Transfer of Files Larger than Memory
- Upload / Download of Text and Programs
- 100% Machine Language
- Loads a 65 Column Screen Driver
- Multiple Buffers
- Off-Line Editing
- Variable Baud Rate
- Parity Options
- Full / Half Duplex

ONLY
\$149.95

LOTSABYTES DECLARES WAR!

WAR on high prices! We're going to put an end to the software price 'ripoff'. And **YOU** can help! Just keep those orders coming while you continue to enjoy the **quality, quantity, selection and low prices** that you deserve. Our National Public Domain Copy Service will save you time, tedious work, and money. And our **exclusive** distribution of **sharply discounted** commercial programs will bring you some of the finest programs for the lowest possible price, usually 50% off retail! You continue to get **FREE BONUSES** with each purchase of three or more disks.

PUBLIC DOMAIN SOFTWARE

<p>#1 GAMES Two full disk sides packed with over 25 games including some Arcade quality. \$7.95</p>	<p>#2 UTILITIES 25 powerful programs to help you get the most out of your Atari computer. \$7.95</p>	<p>#3 AMS MUSIC 25 Advanced MusicSystem files including a new Player program. 2 sides. \$7.95</p>	<p>#4 GAMES All different! 14 more better games on 2 disk sides. Some Arcade types. \$7.95</p>	<p>#5 EDUCATION Loaded with 28 programs on 2 disk sides. Fun learning for the whole family. \$7.95</p>
<p>#6 AMS MUSIC 25 all-time favorites with a Player program. Two sides. \$7.95</p>	<p>#7 GAMES Two disk sides packed with 14 more great games. Some Arcade types. \$7.95</p>	<p>#8 UTILITIES 17 more power-packed utilities to help unleash the full potential of your Atari. \$7.95</p>	<p>#9 GAMES NEW! Two full sides filled with some of the best and most recent. Some Arcade. \$7.95</p>	<p>#10 UTILITIES NEW! A new assortment of great and powerful programs. Don't miss it! \$7.95</p>


LotsaBytes EXCLUSIVES

ADVANCED MUSICSYSTEM II

by **LEE ACTOR**
Allows you to create music with your Atari computer! All new machine code.

- * Control over pitch duration, envelope dynamic level, meter, tempo and key.
- * 4 independent voices
- * 5½ octaves per voice
- * Save up to 8200 notes
- * Custom DOS
- * FULL instructions
- * 24K disk

Originally \$29.95 **Only \$14.95**




ORIGINAL ADVENTURE

by **Bob Howell**
For all Atari computers.

The Original Colossal Cave Adventure faithfully reproduced from the 'main-frames'. This is the one that launched the whole Adventure craze of today!

- * Two mazes
- * 130 rooms
- * Deadly Dragons
- * Nasty Dwarves
- * Tenacious Troll
- * The Pirate & More!
- * 86 coded hints
- * SAVE/RESUME
- * 40K disk or 32K tape

Originally \$29.95 **Only \$14.95**



QUALITY WORD PROCESSING

ESI WRITER! At last a brand-new Word Processor that has more features and is easier to use than anything else available for the Atari. Easy for the beginner to use, it asks questions and remembers the answers. ESI WRITER is so sophisticated that it has many more features we don't even have room to mention! Works with ANY Atari.

- * Reads any text file
- * Built in Help screen
- * Very fast!
- * Works with ANY printer
- * Instant top, bottom or text location without scrolling!
- * Every printer feature
- * DISK ONLY (Any Atari)
- * Search and replace
- * Block move text
- * Page eject/start
- * Set margins/lines etc.
- * Full justification
- * Print headers etc.
- * Block delete etc.
- * Change video color
- * Over 50 pages of docs and tutorials

TRUST US ON THIS ONE! YOU WILL LOVE IT!
Originally \$49.95 **LotsaBytes price \$24.95**

* * FREE BONUSES * *

If you purchase any 3 or more disks at a time you may choose any 1 of the following disks **FREE!!**

- a. The Atari XL TRANSLATOR DISK that enables XL owners to use most 400/800 software. **FREE!!**
- or --
- b. An all different AMS MUSIC disk with Player. **FREE!!**
- or --
- c. Your choice of one of the P.D. disks -- #1, #2, #3, #4, #5, #6, #7, #8, #9, or #10 (specify one) **FREE!!**

Full 100% Replacement guarantee. Any disk found to be defective will be replaced free and we will also refund your return postage. All orders shipped by First Class U.S. Mail. Add \$1.95 shipping and handling for 1 to 5 disks. Add \$2.95 for 6 to 12 disks. California residents add 6% sales tax. Outside of U.S.A. and Canada add 15%. U.S. Funds only. We accept checks or Money Orders. Sorry, no COD or Charge Cards. Allow three weeks for personal checks to clear.

LOTSABYTES

15445 Ventura Blvd., Suite 10G
Sherman Oaks, CA 91413

Atari is the registered trademark of Atari, Corp.

GREAT GAMES!

LotsaBytes Exclusives!

SPACE GAMES: Three games for **one** low price!. In **Aliens** you can't get them all and the pace keeps getting faster. When you do get rid of most of them, you are left in a space quadrant peppered with mines. Will you **Survive?** If you do, you must penetrate the alien's spaceship, survive a **Robot Attack**, and get back your stolen 'cloaking' device! Interested?

\$24.95 list

LotsaBytes price: \$9.95

THE BEAN MACHINE by Steve Robinson is an Award Winning Arcade game that will drive you crazy balancing a series of beams while trying to get all the beans to roll down, without touching, all the while avoiding 'strange creatures' who drop in to steal the beans. It's addicting!

\$24.95 list

LotsaBytes price: \$9.95

DIGGERBONK, another Award Winning game by Steve Robinson, challenges you to find your way through a continuously scrolling maze while avoiding some really strange creatures. Along the way you will need to Bonk some of them, but watch out for the bombs.

\$24.95 list

LotsaBytes price: \$9.95

GUESS WHAT'S COMING TO DINNER lets you try to maneuver a snake through 7 levels if you can keep it from starving or being electrocuted. Lots of surprises! One or two players.

\$24.95 list

LotsaBytes price: \$9.95

* * * *

CREATIVE LEARNING ADVENTURES

Ages 4 to 10 — Disk only

1. Hours of **educational** fun playing 3 exciting creative adventures with a friendly alien learning about our planet Earth. Hand/eye co-ordination, drawing, and music skills are emphasized.

\$24.95 list

LotsaBytes price: \$12.95

2. Four challenging learning games that are the favorites of our friendly alien. Helps your child to develop logical reasoning ability.

\$24.94 list

LotsaBytes price: \$12.95


3. These 3 Fun-Day learning games will help with intellectual development, hand/eye co-ordination, logic, spatial, and analytical abilities.

\$24.95 list

LotsaBytes price: \$12.95

WHEN BATTERIES INCLUDED SET OUT TO
DESIGN THE VERY BEST WORD PROCESSOR
FOR ATARI® COMPUTERS...
THEY FOUND THEY ALREADY HAD IT.

FOR
COMMODORE
AND ATARI

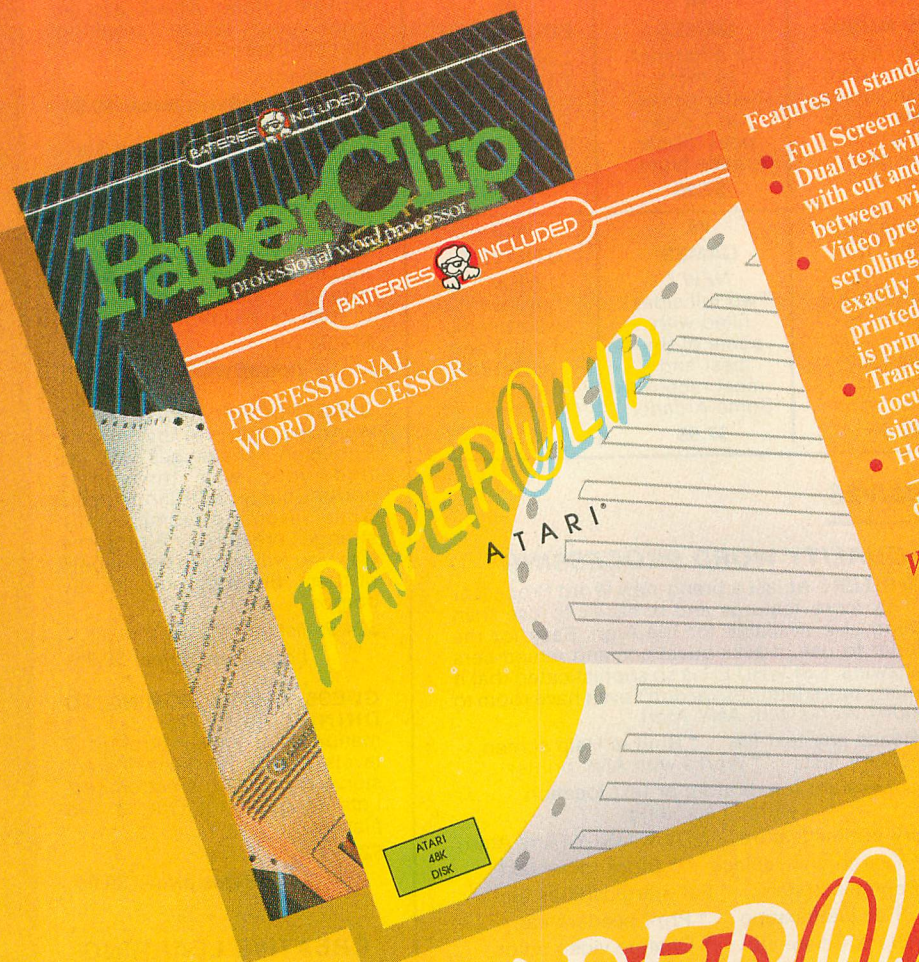

- Features all standard word processing functions PLUS
- Full Screen Editing
 - Dual text windows with cut and paste between windows.
 - Video preview with scrolling, lets you see exactly what will be printed, *before* it is printed
 - Transfer text between documents - easily, simply
 - Horizontal scrolling - create wide documents with ease
 - Re-arrange words, phrases, sentences, paragraphs, and columns with just a few keystrokes
 - More than 40 different printer drivers - plus printer editor allows programming for any printer
 - Easy to learn, easy to use

WORKS WITH THE NEW ATARI
B.I. 80 COLUMN DISPLAY
ADAPTOR FOR XL SYSTEMS.

Compatible with Atari 400, 800,
600 XL, 800 XL, 1200 XL

PAPER@CLIP ATARI®

Few word processors have allowed Atari users to tap the full resources of their computer until Atari Paper Clip...
Atari Paper Clip is an extremely powerful, fully featured word processor that will allow your Atari to operate to the limits of its potential, with an ease of operation and speed you've never thought possible.

**PAPER CLIP FOR ATARI® AND COMMODORE® OWNERS
WHO WANT THE VERY BEST IN WORD PROCESSING.**



"The Energized Software Company!"

FOR A FULL COLOR BROCHURE SEND A STAMPED SELF-ADDRESSED #10 ENVELOPE TO BATTERIES INCLUDED.


186 Queen St. West
Toronto, Ontario,
M5V 1Z1 Canada
(416) 596-1405

17875 Sky Park North,
Suite P, Irvine, California
USA 92714


Antic[®]

The **ATARI[®]** Resource


MARCH 1985, VOLUME 3, NUMBER 11

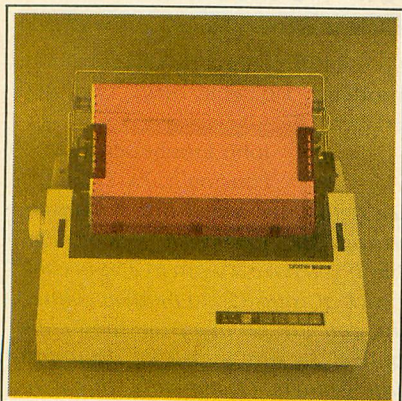

Picking a printer 22

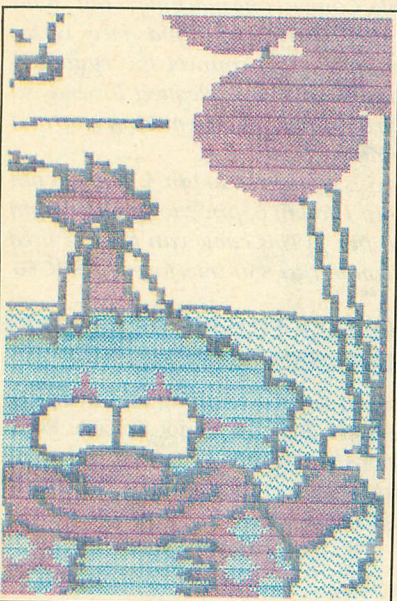

Low-cost color printers 30

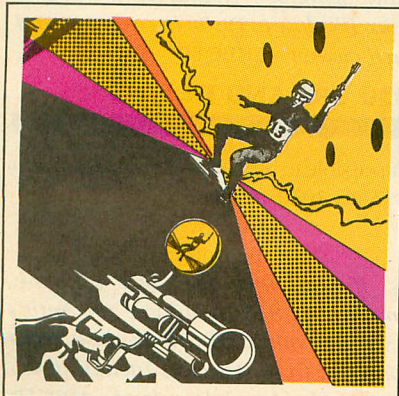

Welcome to the Zurkian Olympics! 48

FEATURES

KWIK DUMP by Jerry Allen The screen dump you've been waiting for	12
TYPE-IN SOFTWARE	
FONT MAKER by James Duffin Design your own character set	16
TYPE-IN SOFTWARE	
LABEL MAKER by William W. Watson Print your own return address stickers	19
TYPE-IN SOFTWARE	
CUSTOM PRINT by Matthew Ratcliff Print those Atari special characters!	21
TYPE-IN SOFTWARE	
ANTIC 1985 PRINTER GUIDE by Michael Ciralo Choosing the best printer for YOU!	22
NEW COLOR PRINTERS by Charles Jackson Starting at \$238	30
SECRETS OF ATARIWRITER by Cassie Stahl (And Atari printers too!)	34
LETTER PERFECT IMPROVED by George Jacobs Version 6 has more perfection	38

DEPARTMENTS

COMMUNICATIONS	
THE BIGGEST ON-LINE PUBLIC DOMAIN LIBRARY by Jerry White	10
GAME OF THE MONTH	
THIEF by Max Langert	46
TYPE-IN SOFTWARE	
BONUS GAME	
ZURK by Michael Kruger and John Settles	48
TYPE-IN SOFTWARE	
ASSEMBLY LANGUAGE	
KEYBOARD COMMANDER by Paul Driver	67
TYPE-IN SOFTWARE	
TOOLBOX	
PARALLEL BUS, REVEALED, PART III by Earl Rice	69
TYPE-IN SOFTWARE	

SOFTWARE LIBRARY

TYPE-IN LISTINGS SECTION	51
---------------------------------	----

I/O BOARD	6	ATARI SERVICE CENTERS	78
HELP!	8	SHOPPER'S GUIDE	81
MICROSCREENS	37	NEW PRODUCTS	82
PRODUCT REVIEWS	74		

Publisher

James Capparell

Editorial Department

Nat Friedland, Editor
Jack Powell, Technical Editor
Michael Ciralo, Associate Editor
Charles Jackson, Staff Writer
Melissa Rockliff, Editorial Coordinator

Contributing Editors

Carl Evans, Ken Harms
Jerry White, Suzi Subeck
Anita Malign

Art Department

Marni Tapscott, Art Director
Linda Tapscott, Ad Production Coordinator
Patricia Foster, Production Assistant

Cover Artist

Alan Okamoto

Circulation Department

Les Torok, Manager
Peter Walsh, Shipping
Hun-sik Kim, Shipping
Monica Burrell, Subscriptions
Eve Gowdey, Dealer Sales
Doug Millison, Retailer Sales
Brandt/Klingel, Direct Marketing Consultants

Accounting Department

V.J. Briggs, Manager
Brenda Oliver, Accounts Receivable
Lorene Kaatz, Credit Manager

Marketing

Gary Yost, Manager, Marketing Services
Steve Randall, Advertising Sales Director
Harvey Bernstein, Advertising Sales

Maria E. Chavez, Receptionist

General Offices (415) 957-0886

Advertising Sales (415) 661-3400

Credit Card Subscriptions

outside California (800) 227-1617 ext. 133

inside California (800) 772-3545 ext. 133

Subscription Problems (415) 397-1881

March 1985

Volume 3, Number 11

Antic—The Atari Resource is published twelve times per year by Antic Publishing. Editorial offices are located at 524 Second Street, San Francisco, CA 94107. ISSN 0745-2527. Second Class Postage paid at San Francisco, California and additional mailing offices. POSTMASTER: Send address change to **Antic**, 524 Second Street, San Francisco, CA 94107.

Editorial submissions should include program listing on disk or cassette, and text file on media and paper if text was prepared with a word processor. Media will be returned if self-addressed stamped mailer is supplied. **Antic** assumes no responsibility for unsolicited editorial material.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the publisher.

Antic is an independent periodical not affiliated in any way with Atari Corp. ATARI is a trademark of Atari Corp. All references to Atari products are trademarked and should be so noted.

Antic is a registered trademark of Antic Publishing, Inc.

Copyright ©1985 by Antic Publishing. All Rights Reserved. Printed in USA.

i/o board

QUIETLY WE AUTOBOOT

How can you make a program load automatically, without any keystrokes?

Mark Zackrisson

Riverside, CA

When Atari DOS 2.0S is booted, it looks for a file named AUTORUN.SYS. If this file exists, it gets loaded into memory. If it doesn't, the computer is turned over to the cartridge or, if no cartridge is present, to DUP.SYS. The AUTORUN.SYS file must be a binary file written in machine language. (No, you can't call your BASIC program AUTORUN.SYS.)

To get a BASIC program to run automatically, you need a binary AUTORUN.SYS program which boots and then says "RUN D:MYFILE". Most of the Antic public domain disks contain an AUTORUN.SYS file that will run any BASIC program named MENU. If you want to call your program something else, look at "Bootbuild" on page 49 of Antic, December, 1983.—ANTIC ED

COVER COMMENTS

Just writing to comment on Alan Okamoto's cover illustration for the November 1984 issue.

Gorgeous.

Daniel Butler

New Berlin, WI

We agree with the readers who wrote us praising Alan Okamoto's lush, yet high-tech science fiction painting. It's just the look we like on Antic covers and you'll be seeing a lot more of Alan's work here — like this month, for instance!

—ANTIC ED

FUN WITH ART

I own an 800XL and the Fun With Art cartridge from Epyx. I tried to use the Atari SDUMP program from the January issue to print my pictures. I can't figure out how to use FWA with my pictures.

Todd Parker

Kinston, MA

SDUMP works with MicroPainter format files only. Use the Easy Graphics Converter program in Antic (September 1984) to convert FWA files to MicroPainter format. —ANTIC ED

LOOK—NO MODEM!!!

Is it possible to connect two Ataris without a modem? Do you need two 850 interfaces?

John Fronheiser II

Pottstown, PA

Once again, we asked Bill Wilkinson, who said "Yes." You need a "null modem" cable. If you have a 9-pin to 25-pin cable for each of your 850-to-modem connections, you can get one from most cable suppliers. Be sure to ask for the appropriate genders. (Technically, this is an RS-232-to-DB9 cable.)

Or you can make your own 9-pin to 9-pin cable. Connect one machine's "out" data to the other's "in", and vice versa. Similarly, cross connect the Data Terminal Ready" and "Request To Send" so each 850 thinks its own modem is up and running.

Pin 5 is connected to pin 5, pin 3 to pin 4, pin 1 to pin 6, pin 7 to pin 8 and pin 8 to pin 7. This cable can then be used to connect to 850 interfaces.—ANTIC ED

THE EVER-ELUSIVE DE RE ATARI

I procrastinated too long on buying **De Re Atari**, and now it's not available. Every serious article about Atari programming quotes or uses this as a source. Where can I get it?

David Miller

Green Clover Springs, FL

You can't. But you might try Advanced Programming Techniques for the Atari by Linda Schreiber, available from TAB books. It's close to De Re in coverage, and much clearer.—ANTIC ED

1030 UPS AND DOWNS

Is it possible to upload and download with my Atari 1030 modem?

Paul Kelm

Bloomfield, NJ

Yes, if you have the right software. Amodem 42.835, available on Antic's 1030 Telecommunications disk, and HomePak from Batteries Included both let you upload and download.—ANTIC ED

continued on page 8

NOW! YOU CAN GET THOUSANDS OF FREE PROGRAMS, AND PUT YOUR TELEPHONE TO WORK

With The New ATARI Modem/Software Package For Only \$79.95!

To get more out of your ATARI, whether you're a brand-new owner or a database expert—this offer is for you. The ATARI 1030 is the easiest-to-use modem on the market. And since the experts at ATARI designed it, you're guaranteed that it works with your ATARI Computer System.

The perfect modem package for everyone, it has all the necessary software built right in. All you need is a 16K ATARI computer and a telephone line to get started! If you're a disk drive owner, this package includes additional software (on disk—selected by ANTIC Magazine) that will give your 1030 all the power you'll ever need!

NEW!

- Upload/Download Files With Your Disk Drive
- Auto Dial Telephone Number Database
- Easy Downloading Of Programs From CompuServe's ATARI SIG.
- Easy Access To All Bulletin Board Systems
- Simple ATARI-To-ATARI "MacIntosh-Like" Terminal Software

and more...

You'll love the hi-tech design of the 1030 modem. It'll look great next to your computer and peripherals! And hidden inside is the most sophisticated circuitry on the market. This means 100% accurate file transmissions the first time—even over voice-grade phone lines anywhere in the country. Your 1030 modem is built almost to military specs—guaranteed to have less than 1 bit-error out of every 100,000 bits—the lowest in the industry.

And, you'll also receive free introductory subscriptions to CompuServe (access to hundreds of great free programs), and Dow Jones

News Retrieval Service (get stock quotes as fast as your stock broker), with FREE TIME ON EACH!

Now ATARI quality at a lower price THAN ANY OTHER MODEM!



YES! I want this extraordinary communications value!

I'm ordering now so I can receive:

- 1 ATARI 1030 300 baud modem with built in software
- Free Introductory Time on: Dow Jones, CompuServe
- Disk Communications Software

The suggested retail value is \$199.95 MY PRICE IS ONLY \$79.95
Send me _____ number of packages at \$79.95 per package to:

Name _____

Address _____

City _____ State _____ Zip _____

Please make check payable to ADD-ON Systems.
Payment enclosed check money order
Bill my Mastercard Visa


Credit Card Orders Only Call Toll Free
800 227 1617 X133
800 772 3545 X133 (inside CA)

California residents add 6½% sales tax.
Add shipping charges of \$2.75 per modem.

Canadian residents please send U.S. dollars • Allow 2-4 weeks for delivery
• Prices subject to change without notice • Delivery subject to availability.

Send coupon to:

ADD-ON Systems
524 2nd St.
San Francisco, CA 94107

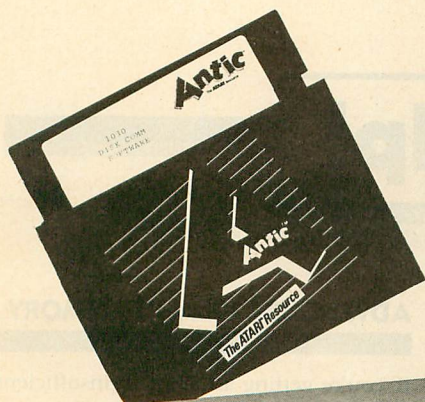

Affordable
Memory

**FACTORY
DIRECT
SPECIAL!**

AXLON

RAMPOWER

PLUG-COMPATIBLE MEMORY

THE DISK EMULATOR

128K RAMPOWER
FOR ATARI 800 **\$299⁰⁰**

Special "Combo-pack" - 128K/32K
COMPATIBLE WITH SynFile™ AND SynCalc™
OF SYNAPSE SOFTWARE CORP **\$325⁰⁰**

48K RAMPOWER
FOR ATARI 400 **\$79⁹⁵**

32K RAMPOWER
FOR ATARI 400
OR 800 **\$49⁹⁵**

COMPATIBLE WITH 128K RAMPOWER

ALLOW 3 to 4 WEEKS DELIVERY



AXLON[®]

1287 Lawrence Station Road
Sunnyvale, CA 94089

QTY		TOTAL \$
_____	128K RAMPOWER @ 299.00	\$ _____
_____	COMBO-PACK 128K/32K @ 325.00	\$ _____
_____	48K RAMPOWER @ 79.95	\$ _____
_____	32K RAMPOWER @ 49.95	\$ _____
_____	(CA RESIDENTS ADD SALES TAX)	\$ _____
_____	ADD SHIPPING + HANDLING \$ 5.00	\$ _____
	TOTAL \$	\$ _____

ENCLOSED IS MY:
Check/Money Order No. _____
VISA/Master Charge No. _____ Exp. Date _____
Name _____
Address _____
City _____ State _____ Zip _____
Signature _____ Date _____

**CALL NOW TO ORDER
(408)
747-1900**

i/o board

CABLING NIGHTMARE

I am having a problem with my disk drive. If I put it on a surface higher than my computer, it works fine. But if I put it on the same level as the computer, it doesn't work properly. What's going on?

Carl Cox
DCS Station
Donnersberg, NY

It sounds like a cabling problem. In fact, the first step in troubleshooting computer snafus is checking the cables. Is everything connected properly? Are there bent pins? Are all the ribbon cables smooth? Sharp angles and twists in ribbon cables cause problems. There shouldn't be any knots in your I/O cable.

Try switching cables. If you can isolate one that is not working, you've solved your problem.—ANTIC ED

BANNERTIZER

Readers' overwhelming response to John Bauman's "Bannertizer" program (Antic, December, 1984) produced several modifications.

Mark Hagen, of West Allis, WI, modified Bannertizer to print the character that is being bannertized. Change line 2040 to read:

```
IF (PIXMAP(PIXPOS)+INV=1) THEN
SS=BANNR$(C,C):GOTO 2060
```

From Cuyahoga Falls, OH, Dick Croghan suggested a change that allows you to input the character from the keyboard:

```
10 DIM BINCOD(8),P$(80),S$(1),X$(1),
PIXMAP(64),BANR (255),BANNR$(255),
ROWMAP(8),Z$(1) 105 ?:"INPUT A
CHARACTER TO FORM THE LETTERS"
:INPUT Z$ 2040 IF (PIXMAP(PIXPOS)+
INV=1) THEN SS=Z$:GOTO 2060
```

If you're looking for letters made in a custom character set, try this suggestion from Derek Catt in Cincinnati, OH: With the custom character set in memory, change the 57344 in line 200 to the starting memory location of the custom set. This is found by PRINT PEEK(756)*256. The prompts and anything you enter during the program will still be in the normal character set unless you remove the graphics commands and change the PRINT #6 in line 4010 to normal print statements.—ANTIC ED



help!

DRUM SYNTH

In figure 1 of the Drum Synth article in February 1985, the key labelled "ART" should indicate the Atari logo (fuji) or inverse video key.

HELP FOR HELP!


February 1985's Help! section needs two corrections. The fix for line 4005 of "Advent X-5" should have a double quote mark before the C: The fix for "Adventure Island" should have a 4 behind the very last comma.

ADVENTURE ISLAND MEMORY

If you're getting an Error 2 (Insufficient memory) while running "Adventure Island" from our November, 1984 issue, it may be because you're using DOS-XL instead of Atari DOS 2.0S. "Adventure Island" is a big program and needs every bit of memory it can get. DOS-XL is a resident DOS and does not leave enough memory for this particular program.—ANTIC ED



Compose music, even if you can't read a note.

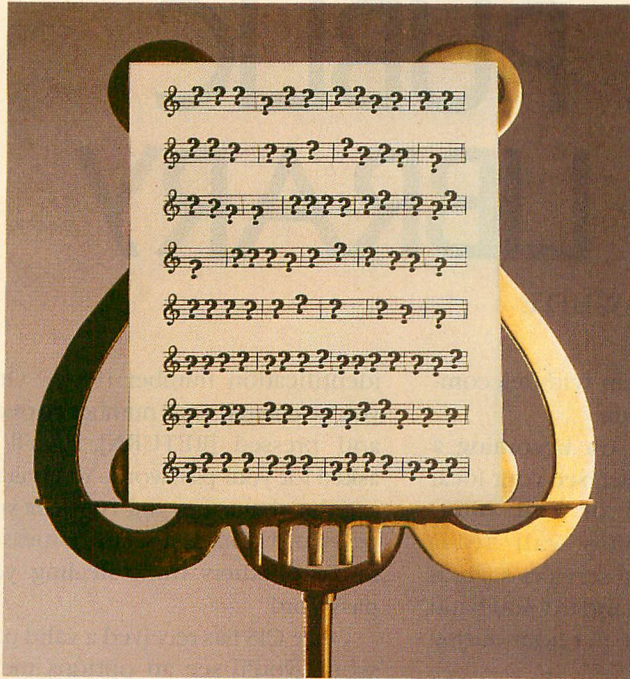

With the Bank Street MusicWriter by Glen Clancy, you compose by computer.

It's so simple, people who don't know a pianissimo from a pizza can start composing in less than an hour.


All you do is match the sound that you hear in your head. And the MusicWriter writes it down.

But don't be fooled by the

simplicity. It's not a toy. It's a tool.

In fact, MusicWriter has everything you need to compose a serious symphony. It has repeats, endings and triplets. It has articulation and transposition. It can shape tones, store 75 staves, and play up to 4 voices.

But even if you don't know what all that means, it won't stand in your way. Because if you can hum a tune, you can write a tune.

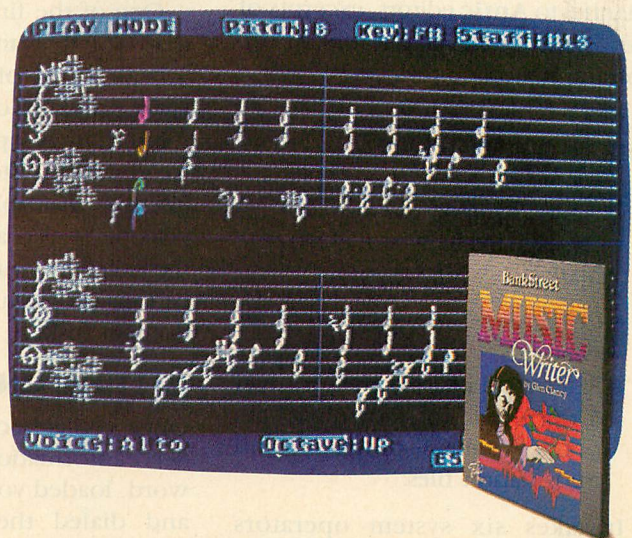

Bank Street MusicWriter from Mindscape

Compatible with Atari® and Commodore® Mindscape, Inc., 3444 Dundee Road, Northbrook, Illinois 60062.

For more information, call 1-800-221-9884. In Illinois, 1-800-942-7315.



THE BIGGEST ON-LINE PUBLIC DOMAIN LIBRARY

by JERRY WHITE

You can become an active member of the largest Atari users group in the world—and have immediate access to a huge library of public domain software! It doesn't matter where you live. All you need to do is pick up your phone and dial CompuServe's Atari Special Interest Group (SIG).

Over 6,000 Atari owners use the Atari SIG. You can communicate on-line with any of them. You can also access **Antic's** Electronic Edition from the SIG menu. (Or log on directly by typing GO ANTIC after the SIG function prompt.)

Antic on CompuServe brings you Atari news just as soon as it happens, a product review library, an open channel to **Antic** editors, excerpts of important articles and a look at upcoming magazine features.

THE BIG SIG

The Atari SIG has three sections:

- Message Exchange for electronic mail.
- Conference Area with 36 "CB" channels.
- Reference Library with more than a megabyte of downloadable public domain programs and information files.

It takes six system operators (sysops) to keep everything going.

To join in, you need a CompuServe membership, your computer and

phone line, a modem with telecommunications software.

For information on becoming a CompuServe member, see your local computer dealer or call (800) 848-8199. In Ohio call (614) 457-0802. Access to services such as the Atari SIG at a standard 300 baud rate will cost you \$6 per hour during the evening.

DOWNLOADING TOOL

And once you're on CompuServe, you can download hundreds of software titles—games, utilities, education, graphics and telecommunication programs.

One of the first on-line programs that you'll want to download is Tscope. Many of the other CompuServe programs can't be downloaded without it. Tscope also lets you view weather maps, stock charts and other graphics available on CompuServe. (Tscope is also available along with the excellent Amodem telecommunication program on an **Antic** public domain disk.)

GETTING ON-LINE

Once you've received your CompuServe Information Service (CIS) password, loaded your modem software and dialed the local CIS access number, you'll be ready to go.

Type [CONTROL] [C] and CompuServe will ask you for your personal

identification number (PPN). Once you've entered your number correctly and pressed [RETURN], you'll be asked for your password. You will not see the characters you type for your password. This is a security measure to keep others from stealing your password.

Once CIS has received a valid password, you'll see an options menu. You can go to the Atari SIG by typing GO PCS132.

The first time you enter the Atari SIG, you will be asked if you wish to become a member. There is no additional charge for membership so type [Y]. Welcome to the group!

Do yourself a favor and read the New Member Information and Help files. There are quite a few commands and these take a while to get used to. But you can always get help by typing a question mark or the word HELP.

SUPER COMMUNICATION

You can also get information on any Atari-related subject from users anywhere in the country, or from the sysops by simply leaving a message.

Often, a message left overnight will surprise you—a simple request for programming help will produce a fantastic thread of responses from other interested Atari owners across the country. It's all there waiting for you at your next log-on!

Type [L] to leave a message. A prompt for the name and PPN of the

intended recipient appears as TO. To leave an open message to all members, type ALL, or to reach a sysop, type SYSOP.

The rest is straightforward. You'll be asked for a subject phrase before you type in the message.

You can then type your message using a simple word processing editor with special commands. But for now, just type as many as 80 characters for each prenumbered line and press [RETURN]. When your message is complete, press [RETURN] a second time.

You must now Save the message with an S# command. Instead of [#] you type the appropriate section number. Section numbers are used in the Message Area and Downloading Library to indicate subjects as follows:

- 1 GAMES & "T.L.S."
- 2 Telecommunications
- 3 Utilities/Applications
- 4 Sound & Graphics
- 5 Education
- 6 SIG*Soapbox
- 7 **HOT RUMORS**
- 8 SIG V.I.P. access

USEFUL COMMANDS

- QS Quick Scan of message topics
- B Bulletin reading
- MI Membership Information
- OP SIG Option changes
- I SIG command Information
- M Return to preview Menu
- T Return to Top menu
- V View membership interest file
- OFF Log Off CIS
- CO Access SIG Conference Area

Once you are in the Conference Area,


you must use special commands that begin with a [/]. For help, type /HELP or to exit, type /EX.

To access the Reference Library for downloading programs, type XA#. Again, type in your desired section number instead of [#].

Uploading and Downloading can be a bit tricky so type [?] for help and read the help files carefully.

Once you're on the system, feel free to leave a message for **Antic**. Or chat with any of the sysops listed below:

- Ron Luks 76703,254
- Michael Reichmann 74015,1534
- Steve Ahlstrom 70007,1657
- Richard Brudzynski 74035,1550
- Russ Wetmore 72435,1234
- Greg Leslie 71565,235

Jerry White is a contributing editor to Antic and a leading professional programmer of Atari software. 

FOR ATARI* 400/800/1200/600XL/800XL*

the XL BOSS

For ATARI 800XL, 600XL with 64k. Replacement operating system to run the vast majority of all ATARI software. No translator or disk to load!

Proper RESET operation especially important for programs like LETTER PERFECT, DATA PERFECT, TEXT WIZARD, etc.

One touch access to extra RAM, all RAM. One touch BASIC on.

Easy plug in installation.

NOW INCLUDES DUAL OPERATING SYSTEM BOARD!

Includes MacroMon XL which is an excellent, unique monitor for beginner and pro alike—written especially for the BOSS. \$79.95 for 800XL/600XL with 64K.



PRINTWIZ

An all machine language text, graphics, mixed mode dump for EPSON, GEMINI, NEC, PROWRITER, OKIDATA, M-T SPIRIT, 160L, KXP-1090, DMP-80, ISD 480, SEIKO/AXIOM GP550A.

Self booting can be used while programming or even running other programs.

Works with or without BASIC, ED/ASM, PILOT, LOGO. Calendar generator. Horizontal format mixed text to be continued in same direction. Change widths, height, center and much more from the keyboard or your program. Special handlers for PAINT, Micro-Illustrator, LOGO, Micro-painter, etc. Includes LISTER program for inverted and special characters plus demos and ideas. \$29.95* 16K Disk-All Interfaces.

diskwiz-II

Fast and easy to use repair, edit, explore, dup, disk utility package. Single load, single or double density. Special printout capabilities.

Repair or change of linked DOS2 or OSA+2 files, directories, dup filenames. Fast searches, mapping, file trace. Disassembler, speed check and much more! Low priced, fast, easy, and powerful! \$29.95 16K Disk.

Send s.a.s.e. for update info.

*TERMS: U.S. funds; check or M.O. add \$2.50 shipping/handling add 6% CA — 6.5% LA COUNTY add \$3.00 for C.O.D. No charge cards accepted add \$2.50 foreign orders normally out within 48 hours.

P.O. BOX 2205/REDONDO BEACH, CA 90278
(213) 376-4105

* Trademark of Atari, Inc.

KWIK DUMP

by JERRY ALLEN

The screendump you've been waiting for


Kwik Dump is a fast screen dump BASIC program that works with most graphics disk file formats, including MicroPainter, Graphics Master, uncompact Micro Illustrator and your own Graphics 24 (8+16) files. It will run on any Atari computer with a disk drive. Memory requirements vary depending on the graphics program. Most graphics capable printers can use Kwik Dump including: Epson, Gemini, NEC 8023, Prowriter 8510, KXP-1090, HP Thinkjet and DMP-80.

Antic receives many letters requesting a good screen dump for one printer or another. So we got the job done by a top pro in Atari printing software, Jerry Allen of Allen Microware. We figured that if the creator of **PRINTWIZ** couldn't come up with something outstanding for **Antic** readers, nobody could.

Jerry did not disappoint us! He provided an article that explains the programming of printer graphics dumps, plus two programs. Kwik Dump is listing 1, which loads your picture into memory and then dumps it to


your printer. Listing 2 adapts the Kwik Dump loading routine for saving your own screens. Type in both listings. Check them with **TYPO II**, then save them to disk. Listing 1 will work with all the printers named in the synopsis above. If you're using any of the various Micro Illustrator programs out there, including the Koala Pad or Atari Touch Tablet versions, you must use uncompact files which can be created by pressing [INSERT] while the picture is on the screen. (See "Easy Graphics Converter", **Antic**, September, 1984.)

continued on page 14

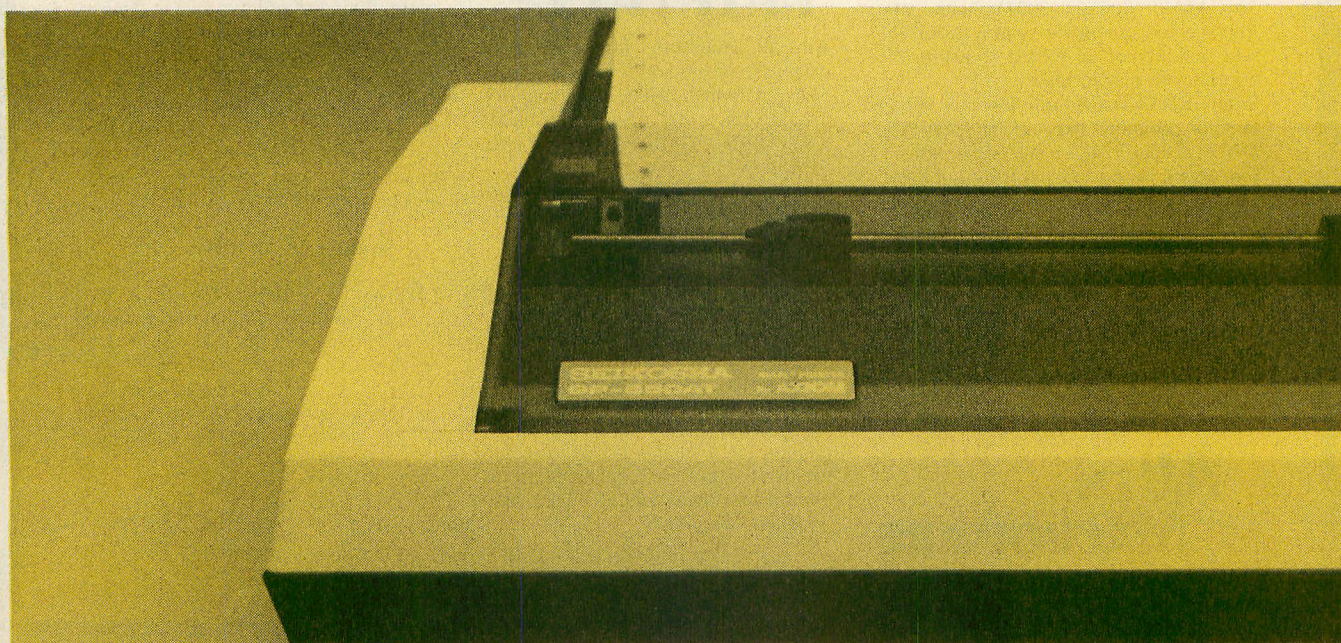

LINDA TAPSCOTT

Only one program lets you create your own crossword, instead of filling in someone else's.

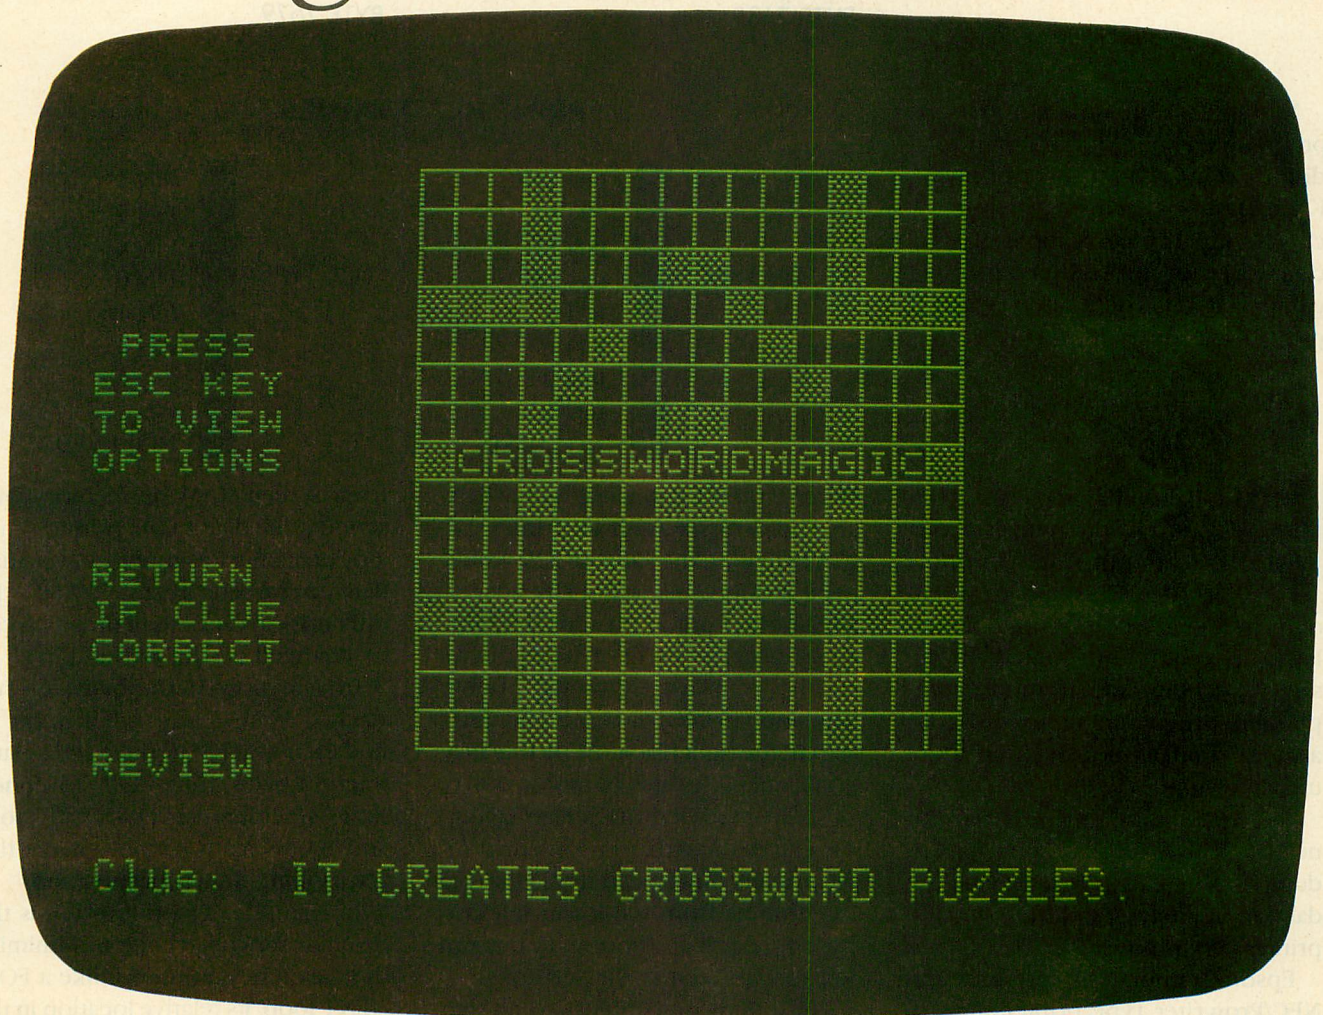

Compatible with Apple,* Commodore,* IBM* and Atari.*

Crossword Magic is just like the crossword puzzles you see in the newspaper. It has the same crossword format. And the same crossword clues.

Yet, it's totally unique. (After all, does it make sense to spend \$49.99 for something you get in your newspaper for a few cents?)

Here's the twist.

Crossword Magic lets you create your own puzzles from scratch. Not only is this fun, but it's also educational. You can use it to test yourself and others on any subject. For example, will they remember that a "protozoan with pseudopodia" is an amoeba?

Now *that's* worth \$49.99.


Crossword Magic from Mindscape



Mindscape, Inc., 3444 Dundee Road, Northbrook, IL 60062. For more information, call 1-800-221-9884. In Illinois: 1-800-942-7315. Price listed is manufacturer's suggested retail price.


Figure 1

SCREEN RAM LAYOUT

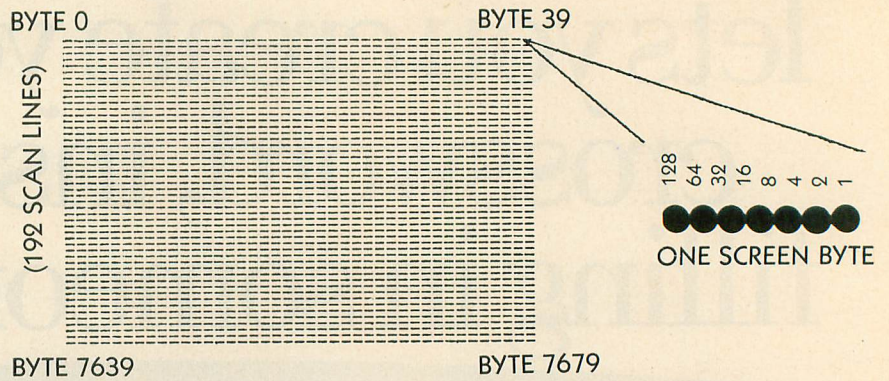

NOTE: Even if you're an Atari programmer who doesn't own a disk drive or a dot matrix printer, Kwik Dump is well worth your close study. It's an example of clean, elegant, professional programming that you'll rarely see printed in a magazine.—ANTIC ED

PRINT HEAD VALUES

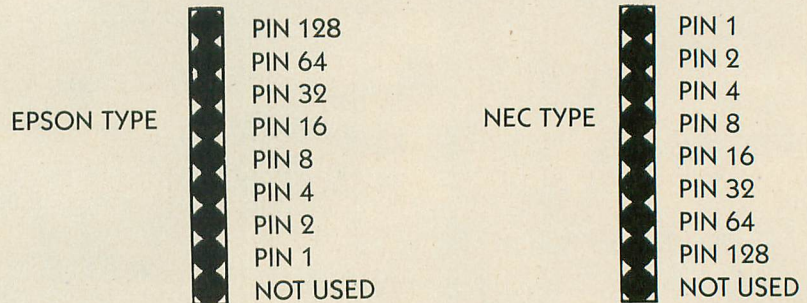

Probably the easiest screen dump to program is a vertical dump for Graphics 8+16 files. This is because all of the screen data can be used directly. Horizontal and mixed mode screens require much more complicated programming in order to achieve similar (though often more useful) results.

The only important criteria you need to know for a Graphics 8+16 dump is where to start retrieving the data in memory, and the specific printer set-up codes.

Epson/Gemini type printers and NEC/Prowriter type printers have 9 vertical pins in their print heads. They both use only the top 8 pins for graphics modes. The similarity stops here. The values for the top 8 pins are exactly opposite. The Epson top pin has the value 128, the bottom pin is value 1. NEC types have the top pin as value 1, the bottom pin is value 128.

Screen RAM bytes for graphics 8 are arranged in horizontal value with the leftmost bit of the byte equaling 128 and the rightmost bit equal to 1.

When a bit is on, the dot is lit. These are the dots we wish to print.

A byte with the value of 129 would print a dot, 6 blank dot-size spaces, and another dot. If the screen is turned 90 degrees, you see that these bytes can be used directly by the printer. The only problem is that if you don't start in the right place, the picture may come out backwards or upside-down.

So, by studying the screen layout, we can deduce that Epson compatible printers should start retrieving data in columns from the lower left corner of the picture, bottom to top and left to right across the screen.

NECs and compatibles should start at the upper right corner in columns from top to bottom and right to left across the screen. *Figure 1* illustrates this. The rest is simply using the proper initialization codes from the printer manual and some relatively simple BASIC.

SPEED FACTORS

The two factors that affect printing speed the most are retrieval of data

from screen RAM or memory, and sending the data to the printer. Since a printer operates much slower than data can be sent, even by BASIC, the only critical time element which can be changed is data retrieval.

In screen RAM the bytes are not stacked as in *Figure 1*. Therefore to find each byte BASIC must add or subtract 40 bytes, times 192 scan lines, times 40 columns. FOR-NEXT loops and BASIC math routines make this a very long-drawn proposition.

In Listing 1, A\$ on line 140 is the machine language code to minimize the data retrieval time. Unlike a FOR-NEXT loop, its relative location in the program is not very critical due to its speed. Similarly, LOD\$ on line 130 speeds the byte data retrieval process from the disk and into RAM.

In listing 1, LOD\$ takes over after the file is opened and the screen is set to Graphics 24 (8+16). It then uses CIO, Atari's Central In-Out machine language interface, to load the 7680 bytes. A\$ contains the math routines for both Epson and NEC type printers to move a vertical stack of bytes to the

temporary buffer which is PRNT\$.

CHOOSE A LINE

When typing in listing 1, lines 130 and 140 may be difficult to enter correctly. The reason they are written this way is to make the program load and run faster than by using data statements each time. Lines 120 and 1000-1100 were put into the program to make typing easier. If you can type lines 130 and 140 with no problem, then don't type in 120 and 1000-1100. If you feel insecure about typing in the special characters directly, type in 120, skip lines 130 and 140, and type in 1000-1100.

If you choose the latter, the first time the program is RUN lines 130 and 140 will automatically be formed as characters on the screen. Also, the lines to be deleted will be placed on the screen. Move the cursor over number 120 and press [RETURN] continuously until all of the line numbers are entered or deleted. SAVE your program again at this point. When you RUN the program again, the above procedure will not be necessary.

CHANGING IT AROUND

When typing in the listings, all REM statements may be omitted. For your own purposes the disk load routine could easily be replaced with a graphics drawing program. The printer codes at line 600 could also be modified to set up codes for slightly different printers or to modify aspect ratios.

As a suggestion you might set up the print routine to send a string of spaces at line 420 prior to the graphics code and graphics data, thereby centering your picture. Try to avoid breaking up line 420 if you try the above. Keeping the FOR-NEXT loop on one line makes it run faster. You can accomplish this by defining a string variable, with a short name such as C\$, to a line of spaces during the program initialization.

When RUN, listing 1 will ask you which type of printer you are using. Then it prompts you to insert your

picture file disk into drive 1. Press [RETURN] when ready. After the directory is up, type in the name of the file you want to dump. Entering the "D:" or "D1:" is unnecessary. 'D2:' may be used, but you will not be viewing its directory.

At this time the picture will load onto the screen and be dumped to the printer. Make sure the printer is online prior to calling up the drawing. Input and device errors are briefly announced and the program will restart if an error occurs. If not, after the dump the screen remains up until you touch any key. Then the program goes back to the directory routine.

LISTING 2


Listing 2 is included to provide a quick and dirty (but interesting) picture file to dump. It also demonstrates SAV\$, which is the same as LOD\$ in listing 1 except for the third character (byte).

In SAV\$ the third character is a [CTRL] [K] instead of [CTRL] [G] in LOD\$. If you already have listing 1 running, LOAD it. Clear the screen and LIST 130. Type NEW [RETURN]. Move the cursor over the line and change the third character to a [CTRL] [K]. Press [RETURN]. LIST or SAVE that line. Or continue to type in the rest of Program 2 and then SAVE it.


When RUN, listing 2 draws a fairly quick Graphics 24 picture and SAVES it to disk. The file can then be

dumped using listing 1. Since no error checking is done, make sure to have an unprotected disk in drive 1 with at least 62 free sectors prior to running the program. The file it saves to will be named PIC.DAT. You may then dump PIC.DAT using listing 1.

SAV\$ can be used as-is in many of your home-brew programs. Just ENTER it making sure that you DIMension it and that line numbers don't conflict. The other routines from listing 1 can be used in much the same way. Just LIST the needed lines to disk. Change the lines in the LISTed file prior to ENTERing them into your already loaded new program. Then SAVE or LIST the whole conglomeration.


Jerry Allen lives in Southern California where he is an engineer at TRW and operates Allen Macroware software publishing (P.O. Box 2205, Redondo Beach, CA 90278). Allen's PRINTWIZ (\$29.95, 16K disk) is a 100% machine language dump for all graphics modes and mixed modes. Its horizontal format allows large continuous text. You can change widths and heights, center automatically, invert, make partial dumps and more. It works with BASIC, assembler, Logo and PILOT and is configured for most popular printers with a parallel interface. Included is a text lister for dumping Atari special characters. 

Listing on page 59

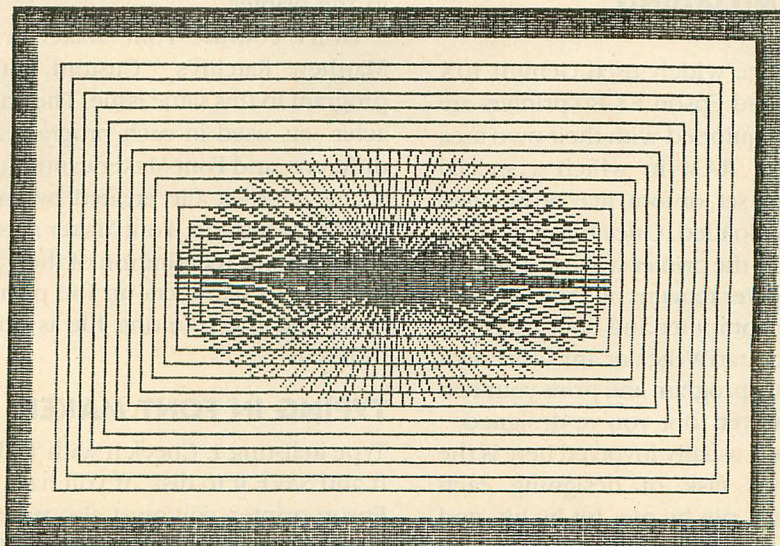

Listing 2 picture file

FONT MAKER

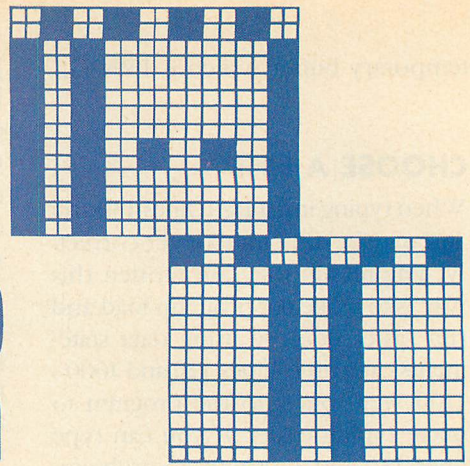

Design your own character sets by JAMES DUFFIN

Design custom font sets for downloading to your Epson FX-80 or Gemini 10X printer. Once the new fonts are installed in the printer, your Atari can be turned off without losing this new character set. You can then re-boot any word processor or printer program, for printing out in your newly designed font. Font Maker works on all Atari computers, but requires 48K, a disk drive, BASIC, and a joystick.


CHARACTER SET DOWNLOADING

The widely-used Gemini 10X and Epson FX-80 printers are equipped with their own area of RAM in which a special character set, or font, may be installed or downloaded. Once this new set is installed, the printer will use it as long as its power remains on. You can turn off the computer and boot up Letter Perfect, AtariWriter, or any other text-handling program and print your text in whatever font you've designed.

What's usually involved here is the laborious task of designing each character, pin by pin, bit by bit, and then—after transmitting the proper set-up codes—sending all the data for

each character to the printer. If you've ever tried to follow the process described in your printer manual, you probably gave up before very long.

Font Maker is a combination of character set editor and printer loader which should simplify both tasks.



The program can be used to design a set which is then saved to disk. The resulting disk file can later be recalled by Font Maker and downloaded again to the printer.

Don't confuse Font Maker with Matthew Ratcliff's "Custom Font" program in this same issue. The character sets used in each program are different, and Font Maker cannot use a character set file created by such editors as Instedit. Font Maker's set is based upon a redefinition of the 9x7 grid of pin hammers on the printer head and the resulting file is quite different.

TYPING IN FONT MAKER

Type in listing 1. Check it with TYPO II and SAVE it to disk. If you have an Epson printer, you must also type in listing 2. LIST it to disk by typing LIST "D:FILENAME". LOAD listing 1 then

ENTER listing 2 and, finally, SAVE the merged program to disk. This is the program you will use. Epson owners should also turn DIP switch 1-4 to the off position (See your manual). This will turn off your 2K buffer and allow it to be used for the new character set.

USING THE PROGRAM

When you RUN Font Maker, a screen of brief instructions will appear. Press any key to get to the editor screen.


The character set on the lower part of the screen shows the printer characters available for editing. Use the joystick controller to move the cursor to the character that you wish to edit. Press the joystick button and the cursor will appear in the dot matrix box in the upper left corner of the screen. The character in the lower set becomes inverse to indicate that it is being edited.

The joystick now controls a cursor in the dot matrix box. The box is empty until you start editing. Press the button to place a dot or remove a dot. Horizontal rows of dots must have a space between each dot, but vertical columns don't need spacing.

See *Figure 1* for an example of the letters in the word **Antic** as redefined

continued on page 18

“A LIVING TAPESTRY . . .”

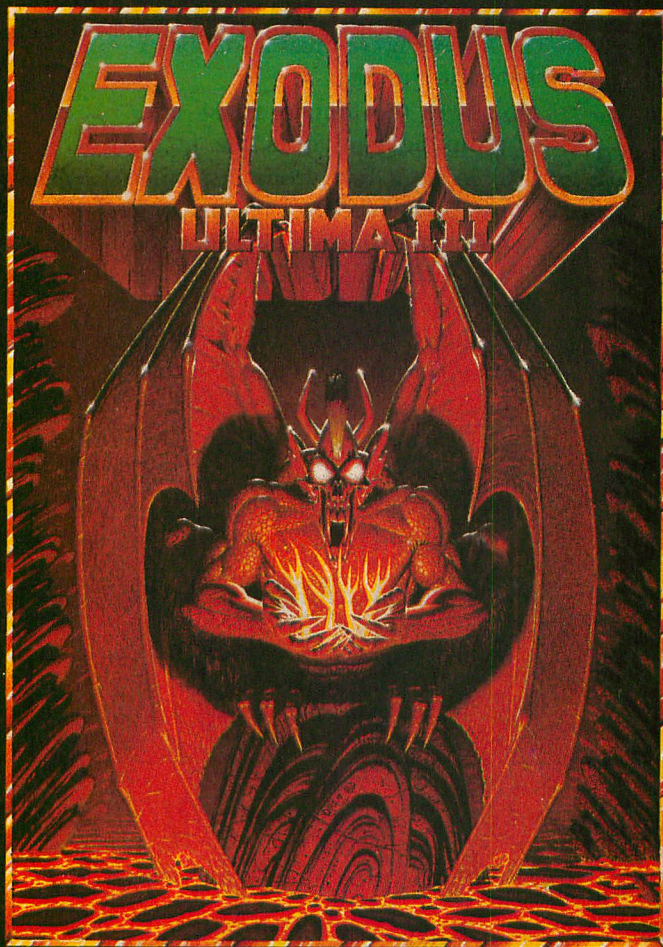

“The world of *Ultima III* can only be compared to a living tapestry — complex and beautiful . . . This is the best fantasy game in computing. Indeed, it is one of the best fantasy worlds in which to live. Lord British is a veritable JRR Tolkien of the keyboard.” — Popular Mechanics

“*Exodus: Ultima III*, with a superior plot to match its superior gaming system, is a great game. It upgrades the market; in several ways it sets new standards for fantasy gaming state of the art.” — Softline

“*Exodus: Ultima III* is Lord British’s magnum opus — so far. It’s fun and exciting to play and constantly intriguing. And the ending is marvelously unexpected and not a bit disappointing — except that it is the ending, and as with a good book, you’ll probably wish there were more.” — Softalk

Available on: Apple, Atari, Com64, IBM

ORIGIN
SYSTEMS INC.

1545 OSGOOD ST., #7 NORTH ANDOVER, MA 01845
(617) 681-0609

Apple, Atari, Com64, and IBM are trademarks of Apple Inc., Atari Inc., Commodore Business Machines, and IBM, respectively.
Ultima and Lord British are trademarks of Richard Garriott. Copyright 1984 by Origin Systems, Inc.

FONT MAKER

continued from page 16

for a special set which is included on the **Antic** subscriber's disk as DECOGEM.FNT for Geminis and DECOEPS.FNT for Epsoms. Before attempting to create an entire set, practice by redefining just these letters.

When you have completed your new dot pattern press [E]. The code for the new character will be stored in memory, and a representation of the edited character will appear at the bottom of the screen. The cursor now returns to the character set to select the next character for editing. Should you decide to re-edit any of the characters from the bottom set, their pattern will first be transferred to the matrix box.

You do not need to redefine all the characters. At any time during the editing process, you may press [START] to download your font to the printer. This takes some minutes, so be patient. Turn up the volume on your TV and you can hear the data being transmitted. Upon completion, you will be given the option of print-

ing the entire set to the printer. Whichever you choose, you can now boot any program and, as long as printer power remains on, all print-outs will be done in the new font.

FONT MAKER COMMANDS

The following commands may be executed at any time:

[S] saves the font to a disk after prompting you for a file name.

[L] loads a font from disk after prompting you for a file name. If you're an **Antic** disk subscriber, you can load the DECO font as described above.

[D] toggles the descender mode on and off. If you wish to edit a char-

acter such as a "g" or "j", turn this on and the character will be printed two dots lower than normal.


Use up to 8 characters for the file name and be sure and use the extender .FNT because the directory routine will only show those files. If you wish to use a different extender, alter line 2020 accordingly.

James Duffin, Ph.D. is an Associate Professor of Anaesthesia and Physiology at the University of Toronto, Canada. He's been programming for three years on an Atari 400, which has been customized with 48K and a keyboard.



Listing on page 54


Figure 1

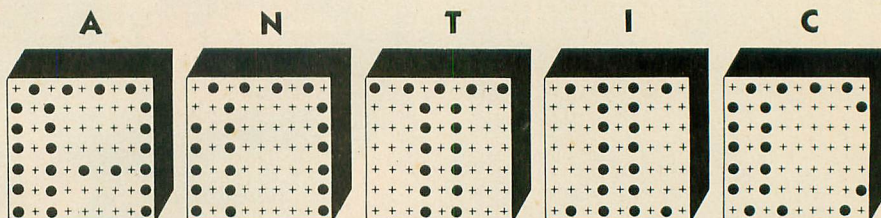

Mercurial, Angry, Sad, Noisy, Friendly, Musical, Rakish, Flirtatious, Laid-Back, Whimsical, Unpredictable

- Andy is a unique electronic accessory that brings a new dimension of fun and learning to your Atari 800™ (48K) or Commodore 64™.
- Comes complete with the PERSONALITY EDITOR™ and sample BASIC program on disk. Control Andy with the PERSONALITY EDITOR or from BASIC, LOGO, ACTION, FORTH, etc.

Andy's PERSONALITY EDITOR allows you and your family to explore the robotics world using simple English words. Once you get used to piloting Andy around one command at a time, you can group words together for more sophistication.

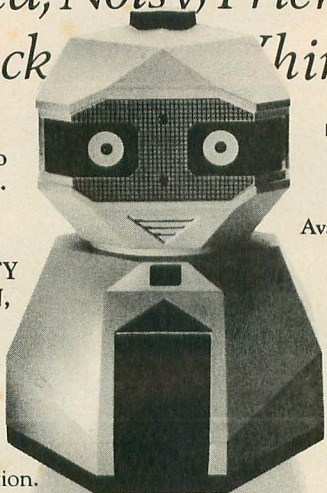


- Complete with built-in Sound Generator and Light, Sound, and Bump Sensors. Compose different moods and tasks for Andy.

Available only through AXLON

\$119.00

Supplies are limited.
So Act Now!



Andy can perform on virtually any surface—wood, vinyl, even the living room carpet. His 4 "D" cell batteries will keep him active in excess of 7 hours.

Meet Andy, he won't bring you breakfast in bed but he will give you food for thought.

A limited offer. \$119.00 (plus \$3.00 Shipping). CA residents add 6 1/2% Sales Tax.

Mail to Axlon, P.O. Box 306, 125 Main St., Half Moon Bay, CA 94019 or call Toll Free 800-632-7979 (CA); 800-227-6703 (Outside CA). Allow 4 weeks for delivery.

Please send _____ Andy(s). Total _____ Payment Enclosed Charge to: VISA MC AMX
 Card Number _____ Exp. Date _____ Signature _____
 Print Name _____
 Address _____
 City _____ State _____ Zip _____



Meet Andy, The World's First Robot with a Programmable Personality

©AXLON, 1984

ATARI 800 is a trademark of ATARI Corp. COMMODORE is a trademark of COMMODORE Inc.

KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK
K ANTIC MAGAZINE
K 524 SECOND STREET
K SAN FRANCISCO, CA 94107
KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK

KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK
K ANTIC MAGAZINE
K 524 SECOND S
K SAN FRANCISCO
KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK

KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK
K ANTIC MAGAZINE
K 524 SECOND
K SAN FRANCISCO
KKKKKKKKKKKKKKKKKKKKKKKKKKKKKK

LABEL MAKER

Print your own
return address
labels

by WILLIAM W. WATSON

Let's say you just ordered 500 return address stickers from one of those coupon sections in the Sunday paper. Then two weeks after the labels arrive in the mail, your company transfers you to Minot, North Dakota.

Well, no need to worry any more. With the Label Maker and your Atari, your printer can turn out an unlimited labels. Print out a few for your Aunt Betty, or for Uncle Harry who keeps telling you that the Atari is just a toy.

Type in listing 1, checking it with TYPO II, and SAVE it to disk or cassette. Later in this article we'll explain how to use Listing 2, which prints larger labels.

For this program to work, you need a dot matrix printer capable of printing in both condensed and superscript of fancy-trim return address

Now you can print tiny return address labels with fancy borders, just like the ones sold in mail-order catalogs. This short BASIC program will run on any Atari. As written, it's for a Gemini 10X printer. But the article explains how Label Maker can easily be modified to work with any dot-matrix printer that prints condensed and subscript lettering.

script modes. It should also be able to handle size 3.5" x 15/16" (single width) labels with tractor feed sprocket holes.

PRINTER ADAPTATION

The program as written is for a Gemini 10X. To adapt it for your own printer, you need to change the codes in line 620.

Presently, line 620 contains the Gemini printer codes for condensed


and superscript lettering. This gives you the smallest type available from the printer. The condensed print code is CHR\$(15). The setting for superscript is CHR\$(27); CHR\$(83); CHR\$(0). Then CHR\$(51) and CHR\$(12) set the line feed to 12/144 inches.

You'll have to find the comparable codes from your own printer manual and substitute them for the line 620 settings shown above. For example, with an Epson FX-80 simply change the CHR\$(12) to CHR\$(18). The codes for both condensed and superscript are identical on both printers. But the Epson's line feed codes are counted in 216th of an inch instead of the Gemini's 144th of an inch.

USING THE PROGRAM

Now load your label paper into your
continued on page 43

BE A PREFERRED CUSTOMER!

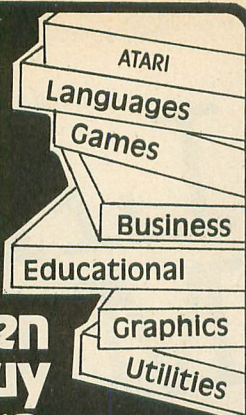

when
you buy
Atari® software.

- ⌘ **PREFERRED CUSTOMERS...** have over 2,000 software items to choose from.
- ⌘ **PREFERRED CUSTOMERS...** get at least 25% off all titles (and often more!).
- ⌘ **PREFERRED CUSTOMERS...** buy from people who specialize in ATARI® exclusively.
- ⌘ **PREFERRED CUSTOMERS...** receive prompt, knowledgeable service.
- ⌘ **PREFERRED CUSTOMERS...** receive 8 pg. newspapers 9 times a year filled with critiques, special tips, and classified ads for new and used equipment.
- ⌘ **PREFERRED CUSTOMERS...** receive our 80 pg. catalog and 20 pg. pricebook.
- ⌘ **PREFERRED CUSTOMERS...** receive consistent low prices and good knowledgeable service.
- ⌘ **PREFERRED CUSTOMERS...**

JOIN CompuClub™

Where Atari owners belong.


To join by phone **800-631-3111**
 call toll free
 In Mass. call 617-879-5232
 Please have credit card number ready!
 Or return this coupon with \$5.00*

YES, I want to be a preferred customer of CompuClub™. Rush me my catalog and price book. Enclosed please find my \$5.00 registration fee.

Please make check payable to Compuclub™
 Payment enclosed check money order
 Bill me Mastercard Visa Expires _____
 ID# _____
 Signature _____
 Name _____
 Address _____
 City _____ State _____ Zip _____
 Computer Model _____ Disk Tape

Hours: Mon. - Fri. 11:00 AM - 7:00 PM Eastern time
 Answering services after hours
 CompuClub™, P.O. Box 652, Natick MA 01760
 *Overseas membership \$15.00 per year
 ⌘ Atari - Trademark of Warner Communications Co.

Software Discounters of America



For Orders Only 1-800-225-SOFT*
 Inquiries and PA 412-361-5291 Open Saturday

- Free shipping on orders over \$100 in continental USA
- No surcharge for VISA/MASTERCARD

ACCESS	Bristles (T or D) . . . \$12	Fortress (D) . . . \$23
Beach Head (D) . . . \$23	Flip Flop (T or D) . . . \$12	Galactic Adventures(D) \$39
Raid Over Moscow (D) \$26	FISHER PRICE	Objective Kursk (D) . . . \$25
ACTIVISION	Dance Fantasy (R) . . . \$17	Questron (D) . . . \$33
Beamrider (R) . . . \$14	Linking Logic (R) . . . \$17	Rails West (D) . . . \$25
Decathlon (R) . . . \$19	Logic Levels (R) . . . \$17	Reforger '88 (D) . . . \$39
Designer's Pencil (R) \$19	Memory Manor (R) . . . \$17	War In Russia (D) . . . \$53
Dreadnaught (R) . . . \$13	FUTUREHOUSE	SCARBOROUGH
Ghostbusters (D) . . . \$21	Complete Personal	MasterType (D or R) . . . \$25
H.E.R.O. (R) . . . \$17	Accountant (D) . . . \$49	Net Worth (D) . . . \$49
Keystone Kapers (R) \$12	Light Pen w/ Peripheral	Songwriter (D) . . . \$25
Pitfall II (R) . . . \$19	Vision (D) . . . \$39	SIERRA ON LINE
River Raid (R) . . . \$12	GAMESTAR	Dark Crystal (D) . . . \$25
Space Shuttle (R) . . . \$19	Star Bowl	Homeworld (D) . . . \$43
ARTWORK	Football (T or D) . . . \$21	Ultima I (D) . . . \$23
Bridge 4.0 (TorD) . . . \$16	Star League	Ultima II (D) . . . \$39
Monkeymath (D) . . . \$18	Baseball (T or D) . . . \$21	Wiz Type (D) . . . \$23
Monkeynews (D) . . . \$18	HBJ	SPINNAKER
Strip Poker (D) . . . \$21	Computer SAT (D) . . . \$49	Adventure Creator (R) \$21
BATTERIES INCLUDED	INFOCOM	Aerobics (D) . . . \$25
B-Graph (D) . . . \$49	Cut Throats (D) . . . \$23	All in Color Caves (R) \$21
Home Pak (D) . . . \$33	Deadline (D) . . . \$29	Alphabet Zoo (R) . . . \$21
Paperclip (D) . . . \$59	Enchanter (D) . . . \$23	Delta Drawing (R) . . . \$21
BIG FIVE	Hitchhikers Guide to	Facemaker (R) . . . \$21
Miner 2049er (R) . . . \$19	the Galaxy (D) . . . \$23	Fraction Fever (R) . . . \$21
BRODERBUND	Infidel (D) . . . \$26	Hey Diddle (D) . . . \$17
Arcade Machine (D) . . . \$39	Planetfall (D) . . . \$23	Kids on Keys (R) . . . \$21
Bank St. Writer (D) . . . \$43	Sea Stalker (D) . . . \$23	Kindercomp (R) . . . \$21
Loderunner (D) . . . \$21	Sorcerer (D) . . . \$26	Story Machine (R) . . . \$21
Mask of Sun (D) . . . \$25	Starcross (D) . . . \$29	Trains (D) . . . \$23
Operation Whirlwind(D)\$25	Suspect (D) . . . \$29	SUBLOGIC
Print Shop (D) . . . \$29	Suspended (D) . . . \$29	Flight Simulator II (D) \$33
Serpent's Star (D) . . . \$25	Witness (D) . . . \$23	Night Mission
Spelunker (D) . . . \$19	Zork I (D) . . . \$23	Pinball (D) . . . \$21
Stealth (D) . . . \$19	Zork II or III (D) . . . \$26	SYNAPSE
Whistler's Brother (D) \$19	*free bonus w/purchase	Syn-Calc (D) . . . \$35
CBS	of 3 infocom titles	Syn-Chron (D) . . . \$25
Astro Grover (R) . . . \$25	KOALA	Syn-Comm (D) . . . \$25
Big Bird's Funhouse(R)\$23	Light Pen w/ Painter (D) \$67	Syn-File (D) . . . \$35
Big Bird's Spc Del (R) \$19	Tablet w/ Painter (D) . . . \$65	Syn-Stock (D) . . . \$25
Ernie's Magic	Tablet w/ Painter (R) . . . \$75	Syn-Trend (D) . . . \$25
Shapes (R) . . . \$19	LEARNING COMPANY	TRONIX
Match Wits (D) . . . \$19	All Titles . . . Call	Chatterbee (D) . . . \$25
Math Mileage (R) . . . \$19	MICROPROSE	Pokersam (D) . . . \$16
Sesame St. Letter	Air Rescue I (D) . . . \$23	S.A.M. (D) . . . \$39
Go Round (R) . . . \$23	F-15 Strike Eagle (D) \$21	ACCESSORIES
Timebound (R) . . . \$19	Hellcat Ace (D) . . . \$19	Ape Face Printer
Webster Word	Mig Alley Ace (D) . . . \$21	Interface . . . \$49
Game (R) . . . \$19	Solo Flight (D) . . . \$21	Astra 2001 Dual
CONTINENTAL	Spitfire Ace (D) . . . \$19	Disk Drive . . . Call
Home Accountant (D) \$44	MUSE	BASF SS, DD . . . \$14 Bx
Tax Advantage (D) . . . \$44	Beyond Castle	BASF DS, DD . . . \$19 Bx
DATASOFT	Wolfenstein (D) . . . \$23	Compuserve Starter
Bruce Lee (T/D) . . . \$23	Castle Wolfenstein (D) \$19	Kit (5 hrs) . . . \$25
Conan the	OSS	Disk Case (Holds 50) . . . \$9
Barbarian (T/D) . . . \$23	Action (R) . . . \$57	Disk Case (Holds 100) \$19
Dallas Quest (D) . . . \$19	Action Tool Kit (D) . . . \$25	Disk Drive Cleaner . . . \$9
Dig Dug (T/D) . . . \$19	Basic XL (R) . . . \$57	Full Stroke
Heathcliff (T/D) . . . \$19	Basic XL Tool Kit (D) \$25	Replacement Keyboard
Letter/Spell Wizard (D) \$47	MAC/65 (R) . . . \$59	for Atari 400 . . . \$49
Mancopter (T/D) . . . \$19	MAC/65 Tool Kit (D) \$25	Indus GT Disk Drive . Call
Pac Man (T/D) . . . \$19	ORIGIN	MPP 1000 Microbits
Pole Position (T/D) . . . \$19	Ultima III (D) . . . \$39	Modem w/ Compuserve
Sands of Egypt (D) . . . \$17	SSI	Starter Kit (50 to
Zaxxon (D) . . . \$17	Battle Normandy (D) \$25	sell) . . . \$119
EPYX	Bomb Alley (D) . . . \$39	MPP 1150 Microbits
Dragonriders Pern (D) \$25	Breakthrough in	Printer Interface . . . \$59
Fun w/ Art (R) . . . \$25	Ardennes (D) . . . \$39	Microbits 64K for
Gateway Aphsai (R) \$25	Broadsides (D) . . . \$25	600XL . . . \$89
Pitstop II (D) . . . \$25	Carrier Force (D) . . . \$39	Mosaic 32, 48, 64K . Call
Summer Games (D) . . . \$25	Combat Leader (D) . . . \$25	Panasonic KXP 1090 Call
Temple Aphsai (D) . . . \$23	Computer Ambush (D) \$39	Sakata 13" Color
FIRST STAR	Computer Baseball (D) \$25	Monitor . . . \$225
Astro Chase (D) . . . \$17	50 Mission Crush (D) \$25	Wico Boss . . . \$12
Boulder Dash (R) . . . \$17	Field of Fire (D) . . . \$25	Wico Bat Handle . . . \$19

P.O. Box 278—DEPT AT—WILDWOOD, PA 15091

*Ordering and Terms: Orders with cashier check or money order shipped immediately. Personal/company checks, allow 3 weeks clearance. No C.O.D.'s.
Shipping: Continental U.S.A.—Orders under \$100 add \$3; free shipping on orders over \$100. PA residents add 6% sales tax. AK, HI, FPO-APO—add \$5 on all orders.
International Order Policy—No Credit Cards—add \$15 or 15% of order whichever is greatest. Defective merchandise will be replaced with same merchandise—NO CREDITS! Return must have authorization number (412) 361-5291. Prices subject to change without notice. **Order today, get it tomorrow. Overnight delivery is just \$17.50—software orders only in Continental U.S.A.**

CUSTOM PRINT

Now—print those special Atari characters

by MATTHEW J.W. RATCLIFF



Finally. . . you correctly typed in that impossible machine language string that **Antic** insisted on publishing. But when you tried to LIST the program to your printer, it reached the line with the crazy characters and began a continuous form feed until you shut off the power. So, how do you make your own printout of "Biffdrop"?


Custom Print uses your printer's graphics capabilities to print an ATASCII file. (This means your program must have been previously LISTed to disk.)

Antic Disk subscribers have a pair of bonus character set samples. The files are titled COMPUTER.SET and STYLISH.SET.

TYPING IN CUSTOM PRINT

Type in listing 1, checking it with TYPO II before you RUN it. If you have a NEC or Prowriter printer, also

With Custom Print you can make complete printouts of your programs or text files—printing any character in the Atari special set. The BASIC program can also load a custom character set file for later printing. Custom Print works on all Atari computers with 32K, BASIC, and a disk drive. It is compatible with the Epson, Gemini or, with the modification listing, the NEC or Prowriter printer.



type in listing 2. This file should be LISTed to disk. Load the first listing, then ENTER listing 2. Save this merged file before RUNning it. (Note: The original program contained a rather long machine language string which has since been changed to data statements for easier typing. This will cause a slight initialization delay. The more adventurous of you may wish to change this back.— ANTIC ED)

USING CUSTOM PRINT

The program will ask if you want to print with a custom character set (c-set), Atari's c-set, or the last set loaded. If you load a c-set you will be



asked for the disk drive number 1–4 that your c-set file is on. A directory for that disk will be displayed on the screen.

You are then prompted to input the filename of the c-set to load. Type the name only, do not type the device D:. If the file selected is not there the error is flagged and the filename is requested again. To refresh your memory, or to get a directory of a different disk (and different drive if desired) just press [RETURN] here to go back to the drive number prompt.

Once a good c-set filename is inputted, all of Atari's characters are printed to the screen. The new c-set is displayed as it is loaded. This only takes a few seconds, so don't blink. The routine even checks for valid c-set files. A c-set for the Atari is 1024 bytes long. If the file loaded is not exactly that length, an error will be flagged and the program will restart. InstEdit by Sheldon Leemon is the best commercially available c-set editor in my book. (See our catalog in this issue.— ANTIC ED)

continued on page 42



PHOTO: LINDA TAPSCOTT

ANTIC 1985 PRINTER GUIDE

Choosing the best printer for you!

by MICHAEL CIRAOLO
Antic Associate Editor

No one ever said choosing the right printer would be easy, even if it is the first peripheral you add to your computer and disk-or-cassette storage device.

Dozens of printers on the market can be hooked up to your Atari. You've got several different printing technologies to choose from. So what's the best printer for you? As usual, what's "best" really depends on what you need.

Instead of bringing you short reviews of every Atari-compatible printer we could find, Antic thought it would be more useful to go into more detail about the printers that seem to be most widely used with the Atari and its word processing software. We also selected enough other good printers to give you a choice at different prices. All printers reviewed were fully tested by Antic —ANTIC ED.

WHAT YOU NEED TO KNOW

PRINT QUALITY

There are currently two standard printer formats, dot-matrix and letter quality, representing several technologies.

Dot-matrix printers use pins or wires as tiny hammers to strike an inked ribbon against paper and form each letter out of a pattern (matrix) of dots.

The quality of dot-matrix printer lettering varies widely. Early dot matrix letters typically looked like a bunch of dots with lots of space in

between, the stereotype "funny computer printing."

By now, most dot-matrix printing is "correspondence quality,"—individual dots are closer together or touching. Text is very readable, even if it still looks different from typewriter letters.

Dot matrix printers have three advantages. They're fast, they usually cost less than letter quality machines and they're the only type of printer versatile enough to print graphics or highly customized characters.






On the other hand, letter quality printers have one significant advantage—their printing looks exactly like it came from an office typewriter.

Most leading letter quality printers use a daisy wheel, a flat disk with over 100 spokes. Each spoke contains a character, which is hammered against a ribbon to create a one-piece image on the paper.

If you want different lettering fonts, you can simply change daisy wheels. Depending on which dot-matrix printer you select, you may well be able to program new fonts with ready-made software. Because daisywheels must be changed while the printer is stopped, only dot-matrix printers allow you to change fonts within a line of text.

Some features can be found in both types of printers, but are not necessarily in every printer. These include proportional spacing, subscript and superscript, variable pitch (the number of characters per inch).

continued on next page

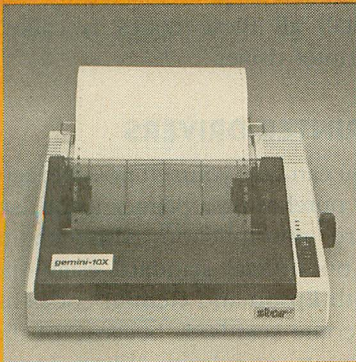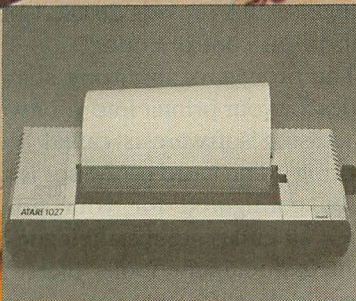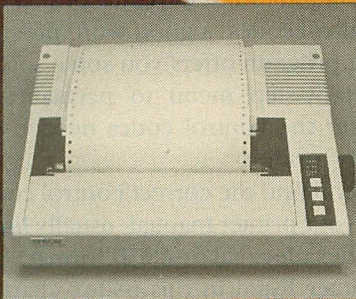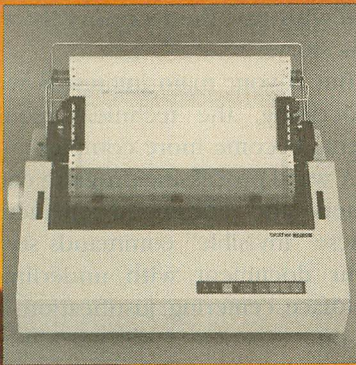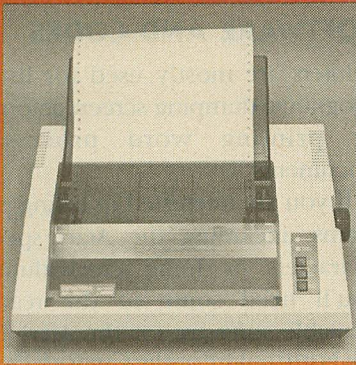

You also get a choice of paper feed methods. Friction feed is the familiar typewriter method, the paper is held by rollers pressed tightly against the platen. Tractor feed allows you to use the fan-fold computer paper with holes at the sides, and adjustable tractor feed lets you print labels.

CABLES AND INTERFACES

In this world without universally accepted computer standards, it's not easy to escape compatibility hassles.

This can get especially aggravating when you're setting up a printer. Because here you have an extra consideration—the special cables that connect your Atari and the printer of your choice.

Computers are connected to printers by cables. Many first-time printer buyers are shocked to find that these cables usually cost extra—\$30, \$40, \$50 . . . Not only that, it's often necessary to hunt around for the right cables because they're not manufactured by either the printer or the computer company.

All a cable really does is transfer electrical signals from the computer to the printer in patterns the printer can translate to letters, numbers, punctuation, spaces, carriage returns, etc.

Printer cable plugs come in standards called either RS-232C (serial), or Centronics (parallel). Or they may be in non-standard formats set by certain computer manufacturers . . . including Atari.

Depending on what printer you choose for your Atari, you may need an interface. This can be the hard-to-find Atari 850, which will require a separate printer cable. Or you can get a combination of cable and interface, like the **MPP Microprint**. Most interface devices are designed for parallel printers, and plug right into your Atari's peripheral ports. Adjoining this story you'll find a list of these proven products.

One thing to watch for: if you have any peripherals with only one port (such as the Atari 410 cassette recorder) make sure the printer interface provides you with a second port for complete daisy chaining.

SOFTWARE AND CODES

Printers are mostly used for listing programs, dumping screen graphics, or printing word processing documents.

If you are interested in listing programs, including the Atari special characters, or doing screen dumps, you'll need some of the readily available software for the Atari. See the **Fontmaker** or the **Custom Print** articles in this issue or, for more "bells and whistles", the accessory list with this story.

But if your main interest is word processing, the technical requirements become more complex.

A word processing program enters letters and command characters. These "invisible" commands stylize your document with underlining, boldface, centering, justification, and so on.


The command characters must be communicated to your printer by control codes. A good word processing program offers you some sort of step-by-step menu to permanently enter the control codes needed for your printer.

You find the correct control codes in your printer manual, usually listed in hexadecimal or ASCII format. Any printer listed in this issue's chart as having "good" or "excellent" documentation will provide detailed information on control codes.

The process of inputting a set of codes for your printer into your word processing software is called "configuring". The word processor is said to be configured for your printer when all codes are installed and the printed document looks like what you told the software to print. A configuration program that allows you to install all these codes is called a "printer driver."

PRINTER DRIVERS

You can save yourself possible agony by purchasing a printer using "standard" control codes. Although there is no official standard established, both Epson and Gemini codes have become standards because of these printers' popularity. When a printer

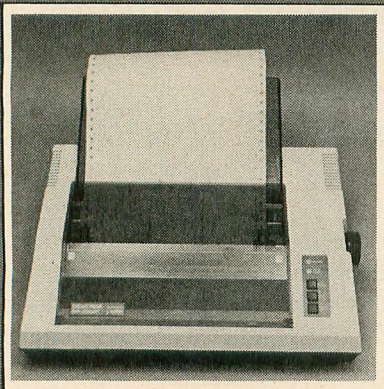

Axiom GP-550AT

```
XXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRST
XXXXXXXXXXXXXXXXXXXXXXXXX
Printers v
Manufacturers of
without include
XXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRST
XXXXXXXXXXXXXXXXXXXXXXXXX
Print sample from Axiom
```

```
correspondence qual
vert./hor. increment
proportional spacing
expanded p
enhanced print
suPerScripting
compressed print
emphasized print
underlining
```

Print sample from Okidata

```
XXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRSTUVWX
XXXXXXXXXXXXXXXXXXXXXXXXX
Printers vary
Manufacturers often
without include lin
XXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRSTUVWX
XXXXXXXXXXXXXXXXXXXXXXXXX
Print sample from ThinkJet
```


is described as being "Gemini (or Epson) compatible," its control codes should be the same as those printers. If your printer is standard, you should be able to configure your system by simply selecting the make of your printer from a program menu.

We cover the compatibility of control codes for all printers reviewed in this issue.

Another factor that may be necessary for correct configuration is the proper setting of the "DIP" switches. These are banks of tiny switches, either inside or outside your printer, which control various functions such as line feeds or buffer allocation, depending upon the printer design. Again, a printer that comes with good documentation will explain exactly what is required.

DOT-MATRIX PRINTERS

AXIOM GP-550AT

The **Axiom GP-550AT** (\$319), made by Seikosha, offers instant connection, plugging directly into your Atari peripheral ports. It is less expensive than other dot-matrix printers, yet offers a variety of fonts and pitches. The GP-550AT can print text or high-resolution graphics. It also underlines, prints subscript and superscript. Both friction and adjustable tractor feed are provided.


The GP-550AT is also slow and noisy, but these are negligible shortcomings given the low price. More significant is that its print quality is not impressive.

OKIDATA 92


Also known as the **Okidata Microline 92** (\$440), this is a favorite of many Atari owners.

The Oki does all of the standard dot matrix tricks—superscript and subscript, expanded and boldface print, proportional spacing and correspondence quality printing, and so on.


It is slower than more expensive dot matrix printers, but also slightly quieter. However, it makes a high pitched sound which could be irritat-

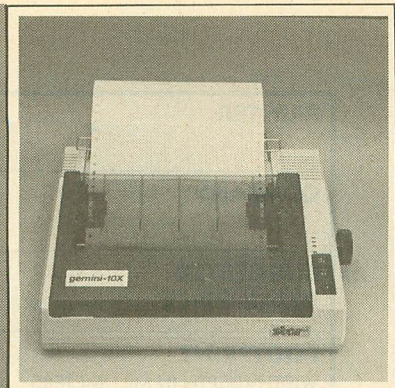


Gemini 10X

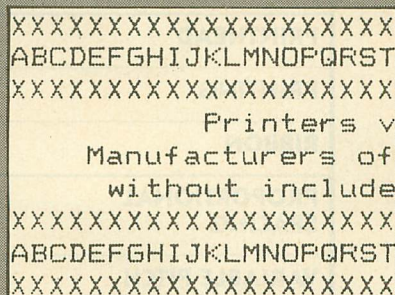

Print sample from Gemini

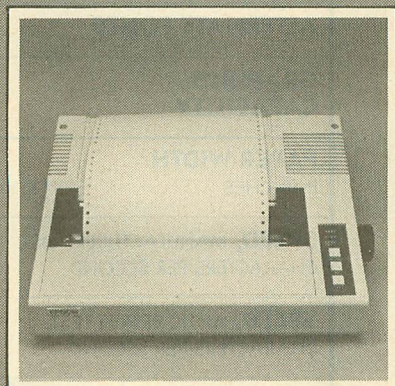

Epson FX-80

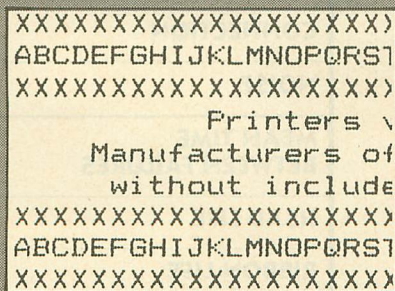

Print sample from Epson

ing to some.

The mean-time-between-failure, or reliability, is twice that of the Axiom.

But the print density for graphics is less than other printers. This is significant, because it determines the appearance of a graphics dump. The more dots per inch, the better the picture's resolution and appearance.

HEWLETT-PACKARD THINKJET

Ink jet technology is a recent addition to the printer scene. An ink-filled cartridge sprays ink onto special paper to form each character with the appearance of a good dot-matrix printer. The \$7.95 cartridge replaces conventional ribbons and printheads.

The **Hewlett-Packard Thinkjet** (\$495) was the smallest, fastest and quietest printer we reviewed. Epson-compatible, it is built HP tough. However, it does have a few drawbacks, including its need for a high-absorbency paper which is slightly more expensive than ordinary paper and must be ordered from HP.

If you print long files, say 30 pages, the ink cartridge gets clogged and needs to be wiped. Finally, all paper feed is accomplished only by membrane buttons, so manually adjusting the paper is difficult.

GEMINI 10X

The **Gemini 10X** (\$549) is a favorite around the **Antic** office for its all-around versatility coupled with low cost and a work-horse disposition. It prints our labels, listings, memos, and articles.

The Gemini has all the features made standard by Epson—expanded, condensed and bold script, superscript and subscript, and so on. You can download character sets to the Gemini, and use it for graphics dumps.

Both the Gemini and the Epson are regarded as standards for the dot-matrix industry, but there are a few differences worth noting. The Gemini uses a standard two-spool typewriter ribbon—an easier-to-find ribbon could not be had. The Gemini comes with adjustable width tractor feed,

continued on page 28

PRINTER CHART CATEGORIES EXPLAINED

Footprint refers to the desktop space the printer occupies, its width and depth.

Proportional spacing is the kind of typesetting used in professional publications. In contrast, standard typewriters leave the same amount of space around wide letters (M,W) as narrow letters (I,l).

Variable pitch is the ability to print different amounts of characters per inch (pitch).

Alternate fonts are available with most dot-matrix printers. You can change fonts with some daisywheel printers by manually switching the print wheel.

Graphics capability is measured in dots per inch—the more dots, the higher picture resolution.

Speed as measured by manufacturers (in characters per second) is generally faster than the actual time it will take you to print a document. The Antic test reflects real printing conditions, such as boldfacing and carriage return times.

DIP switches are found on most printers. Some allow you to change the data transfer settings, others load alternate character sets. The number of switches indicates the flexibility of the printer.

Noise rating is somewhat subjective. The Epson and Gemini are similar, although the Gemini is higher pitched. The Axiom and Atari are the noisiest of the bunch.

Mean time between failures, head life and ribbon life are all measures of reliability supplied by the manufacturer.

Documentation: Abysmal means a 6-page sales brochure that tells you nothing. Adequate means someone published the technical notes as is. Good means you'll easily find everything you need to know, and then some. Excellent means Epson went an extra step and included a 320-page book with their printer at no extra charge, with programs and project ideas.

PRINTER	AXIOM GP-550AT	OKIDATA 92
COMPANY*	AXIOM CORPORATION	OKIDATA
SUGGESTED RETAIL PRICE	\$319	\$440
FOOTPRINT WIDTH×DEPTH IN MILLIMETERS	420×305	355×323
WARRANTY IN DAYS (PRINTER/PRINTHEAD)	SEE NOTE 1 BELOW	90/1 YEAR
PRINTHEAD	IMPACT DOT MATRIX	9×9 DOT MATRIX
PRINTING	UNIDIRECTIONAL	BIDIRECTIONAL
RIBBON	AXIOM CASSETTE	OKIDATA SPOOL
PROPORTIONAL SPACING	YES	YES
VARIABLE PITCH	YES	YES
SUPERSCRIPIT AND SUBSCRIPT	YES	YES
ALTERNATE FONTS	YES	YES
GRAPHICS CAPABILITY	120×120	72×72
PAPER WIDTH IN INCHES	4.5-10	8.5-9
SPEED, MANUFACTURERS LIST, CHARACTERS PER SECOND	12-86; 50 AVERAGE	40-160 CPS (CORRESPONDENCE QUALITY IS 40)
SPEED, ANTIC BENCH TEST, CHARACTERS PER SECOND	35	N/A
FEED TYPE	FRICTION/TRACTOR	FRICTION/TRACTOR
DIP SWITCHES	4	N/A
CONNECTION	DIRECT ATARI CONNECT	PARALLEL STANDARD, SERIAL OPTIONAL
NOISE	LOUD	HIGH PITCHED BUT FAIRLY QUIET
MEAN TIME BETWEEN FAILURES	2,000 HOURS	4,000 HOURS
HEAD LIFE	N/A	N/A
RIBBON LIFE	500 FULL PAGES	N/A
DOCUMENTATION	ADEQUATE	ADEQUATE
COMMENTS	INTERMIXING ALLOWED	BUFFER 256 CHARACTERS OPTIONS INCLUDE ADJUSTABLE TRACTOR

*See end of article for manufacturer information.

DOT MATRIX

LETTER QUALITY

THINKJET	GEMINI 10X	EPSON FX-80	ATARI 1027	BROTHER HR-25	C.I.TOH F10 STARWRITER
HEWLETT PACKARD	STAR MICRONICS	EPSON AMERICA	ATARI CORPORATION	BROTHER INTERNATIONAL	C.I.TOH
\$495	\$549	\$569	\$300	\$699	\$1795
194x282	392x315	420x347	369x156	538x385	574x405
90	180/90	1 YEAR	90	90	1 YEAR
INKJET CARTRIDGE	9-WIRE, 5x9 DOT MATRIX	11x9 DOT MATRIX	FIVE-WHEEL HEAD	DAISYWHEEL	QUME DAISYWHEEL
BIDIRECTIONAL	BIDIRECTIONAL	BIDIRECTIONAL	UNIDIRECTIONAL	BIDIRECTIONAL	BIDIRECTIONAL
INKJET CARTRIDGE	UNDERWOOD SPOOL 13x50MM	CARTRIDGE	CASSETTE	TWO-COLOR BROTHER NYLON OR CARBON FILM	DIABLO RIBBON
YES	YES	YES	NO	YES	YES
YES	YES	YES	NO	YES	YES
YES	YES	YES	NO	YES	YES
YES	YES	YES	NO	BY SWITCHING DAISYWHEEL	SWITCH DAISYWHEEL
192x96	240x144	480x792	NO	NONE	NO
8.5	8-10	9.5-10	8.5	UP TO 15	16.25
120	120	160 CPS	20	24	40
100	80	92	7.5	19	N/A
FRICION/TRACTOR	FRICION/TRACTOR	FRICION/TRACTOR	FRICION	FRICION	FRICION
8	12	12	NONE	16	NO
PARALLEL OR SERIAL	PARALLEL STANDARD, SERIAL OPTIONAL	PARALLEL	DIRECT ATARI CONNECT	PARALLEL STANDARD, SERIAL OPTIONAL	PARALLEL OR SERIAL
VERY QUIET	FAIRLY QUIET	QUIET	LOUD	QUIET	QUIET
5,000 HOURS	5 MILLION LINES	5 MILLION LINES	N/A	3,000 HOURS	3,000 HOURS
100 MILLION CHARACTERS	100 MILLION CHARACTERS	100 MILLION CHARACTERS	N/A	10 MILLION CHARACTERS	N/A
500 FULL PAGES	N/A	3 MILLION CHARACTERS	N/A	60,000-500,000 CHAR. DEPENDENT ON TYPE	N/A
GOOD	VERY GOOD, POOR INDEX	VERY GOOD	ABYSMAL	ADEQUATE	POOR
REQUIRES SPECIAL PAPER, REGULAR CARTRIDGES COST ABOUT \$8.	INTERMIXING ALLOWED BUFFER 816 BYTES, EXPANDABLE TO 4K OR 8K	ADJUSTABLE TRACTOR \$40		BUFFER 3K OPTIONS INCLUDE ADJUST- ABLE TRACTOR AND AUTO COPY FUNCTION	OPTIONS INCLUDE ADJUSTABLE TRACTOR

NOTES

Footnote 1: Warranty 1 year for nonbusiness user, 90 days for business.

LETTER QUALITY PRINTERS

ATARI 1027

The Atari 1027 (\$300) is to letter-quality daisywheel printers what an early Royal Standard is to an IBM Selectric. The eccentric 1027 design uses five wheels on a spindle, each wheel containing characters. These spin over the paper, stopping to press against the ribbon and paper after receiving the proper codes.

The great advantage here is the cost—somewhere under \$300, depending on the whim of your local retailer. (Atari officials, who asked not to be quoted by name, reluctantly said that their suggested retail price was \$296.84.) The 1027 really is letter-quality and it really works. It also plugs directly into the Atari computer.

However, it takes nearly nine minutes to print a page of text—what a dot-matrix does in one minute. And it only accepts one piece of paper at a time. The construction of the 1027 does not seem convincingly firm, compared to more expensive printers. And it comes with the worst printer documentation we've ever seen.

BROTHER HR-25

The wide-ranging Brother family includes excellent letter-quality printers. We have included the Brother HR-25 (\$699) as a reasonably-priced printer suitable for professional word processing. (You might also wish to consider its little brother, the HR-15. At \$419, the HR-15 is slower and has less frills, but still offers excellent quality.)

The HR-25 can print in red and black with the proper ribbon. It is solidly built and has all the features required for a good letter-quality machine: proportional spacing, superscript and subscript, strikeout, underlining, paper-out detection, and so on.

The HR-25 also comes with a 3K buffer. This is not necessarily an advantage, as there is no way to turn off the buffer. For certain documents and printing jobs, it's handy to control the

perfect if you print variable size labels. It also comes with a roll-feed device, in case you want to use rolled European paper.

The Gemini is fully controllable from software. This includes both internal and external DIP switches, and also the out-of-paper sensor.

Although it is priced at \$549, mail order houses (see **Antic** advertisers) frequently sell the Gemini for under \$259.

EPSON FX-80

The Epson FX-80 (\$569) is a solid value and the choice of many Atari owners who want high quality dot-matrix printing. The FX-80 offers regular and italic fonts, regular or boldface printing, expanded and compressed print, and excellent graphics ability.


You can download custom fonts to the FX-80, and produce dot-matrix resolutions as high as 240 x 240 dots per square inch. The printer is fast. It also features an out-of-paper sensor that halts operation so you can replace the paper.

The clear competitor for the Epson is the previously discussed Gemini. What do you get for a \$20 difference in suggested retail price? Primarily speed. The **Antic** bench test of the two printers indicated the Epson printed at 92 characters per second, including line feeds, to the Gemini's 72. The manufacturers claim 160 cps for the Epson to the Gemini's 120.

Finally, the Epson comes with the best documentation on the market. You will find technical data, a good index, well-described basics and challenges for advanced graphics programmers.

You can find the Epson for about \$400 by checking mail order prices.


Incidentally, there are less expensive Epsoms which we were not able to review here, but which carry the same reputation for quality as the FX-80. However, only the FX-80 has user-addressable RAM for character set dumps.

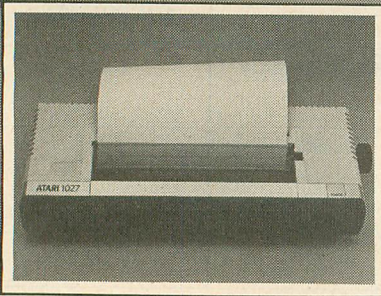

Atari 1027

```
XXXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRSTUVWXYZ
XXXXXXXXXXXXXXXXXXXXXXXXXX
Printers vary
Manufacturers often
without include lir
XXXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRSTUVWXYZ
XXXXXXXXXXXXXXXXXXXXXXXXXX
```

Print sample from Atari

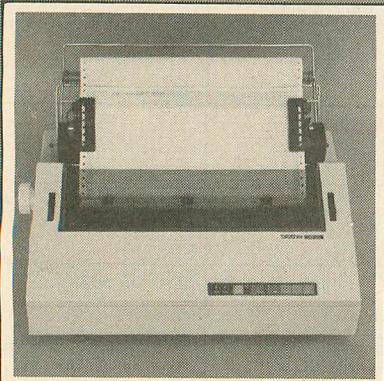

Brother HR-25


```
XXXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRST
XXXXXXXXXXXXXXXXXXXXXXXXXX
Printers v
Manufacturers of
without include
XXXXXXXXXXXXXXXXXXXXXXXXXX
ABCDEFGHIJKLMNPOQRST
XXXXXXXXXXXXXXXXXXXXXXXXXX
```

Print sample from HR-25

continued on page 33


COLOR

The OKIMATE 10 Personal Color Printer's got it for \$238.*



The first affordable color printer.

Atari® computer owners, meet the one and only. The new OKIMATE 10 Personal Color Printer. The first personal printer that lets you print in a rainbow of 36 dazzling colors.

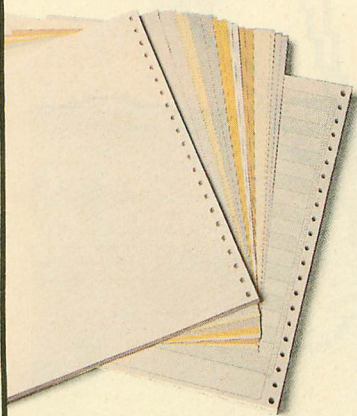

Now your Atari personal computer has new meaning. Because OKIMATE 10 can bring the information on your screen to life. Printing on plain paper. In brilliant color. For very little green.

Fully equipped for reading, writing and 'rithmetic.

The OKIMATE 10's word processing capability delivers crisp, clean term papers, school reports and homework. At 240 words per minute. So now you can print an assignment off your Atari personal computer in minutes, instead of typing it in hours. And OKIMATE 10 lets you highlight words, headlines, paragraphs and charts with wide, bold, or fine print. So you and your information really stand out.

If you use your Atari personal computer to keep track of mortgage payments, tuition payments, your checkbook or beat Dow Jones to the punch, here's good news: the OKIMATE 10 gets down to business quickly. And easily.

Easy to learn, easy to use.

"Learn-to-Print" software comes with OKIMATE 10 to show you how to start printing. And the OKIMATE 10

Handbook will teach you how to get your wildest ideas and images down on paper. Now you're set.

OKIMATE 10 makes it easy to get color from the screen to paper because it comes with its own "Color Screen Print" program.

Just plug the OKIMATE 10 into your Atari personal computer with the PLUG 'N PRINT package.* And print. It's that easy.



Everything Included.

For \$238 you get both the printer and the PLUG 'N PRINT package plus



everything you need to print: black ribbon, color ribbon, data cable, PLUG 'N PRINT control cartridge, "Learn-to-Print" program, "Color Screen Print" software package, computer paper, and an easy to read handbook.



OKIDATA
an OKI AMERICA company
Mt. Laurel, NJ 08054

Available at retailers everywhere.

Atari is a registered trademark of Atari Inc.

*PLUG 'N PRINT packages for Atari computers sold separately. Atari requires disk drive and 48K memory.

NEW COLOR PRINTERS

Starting at \$238


by CHARLES JACKSON, *Antic* Staff Writer

If you're an Atari microscreen artist who feels you absolutely cannot wait a moment longer to make color printouts affordably, then the **Okimate 10 Personal Color Printer** (Okidata, \$238) or the **Seiksha GP-700A Color Graphic Printer** (Axiom, \$599) might be just what you're looking for.

However... as you can see from the accompanying illustrations, neither printer delivers color pictures that look as bright and sharp as your video display. And we had to spend much of a workday tinkering with the color registers of our sample file before getting any acceptable results. Also, lettering with black ink was not

as good as the Gemini and Epson dot matrix printers we're used to.

But you can judge each printer for yourself. For our test illustration we chose a microscreen sent to *Antic* by Jennifer Brabson of Springfield, Virginia. On this page we show the Okimate and Seiksha printouts, along with a photo of the actual video

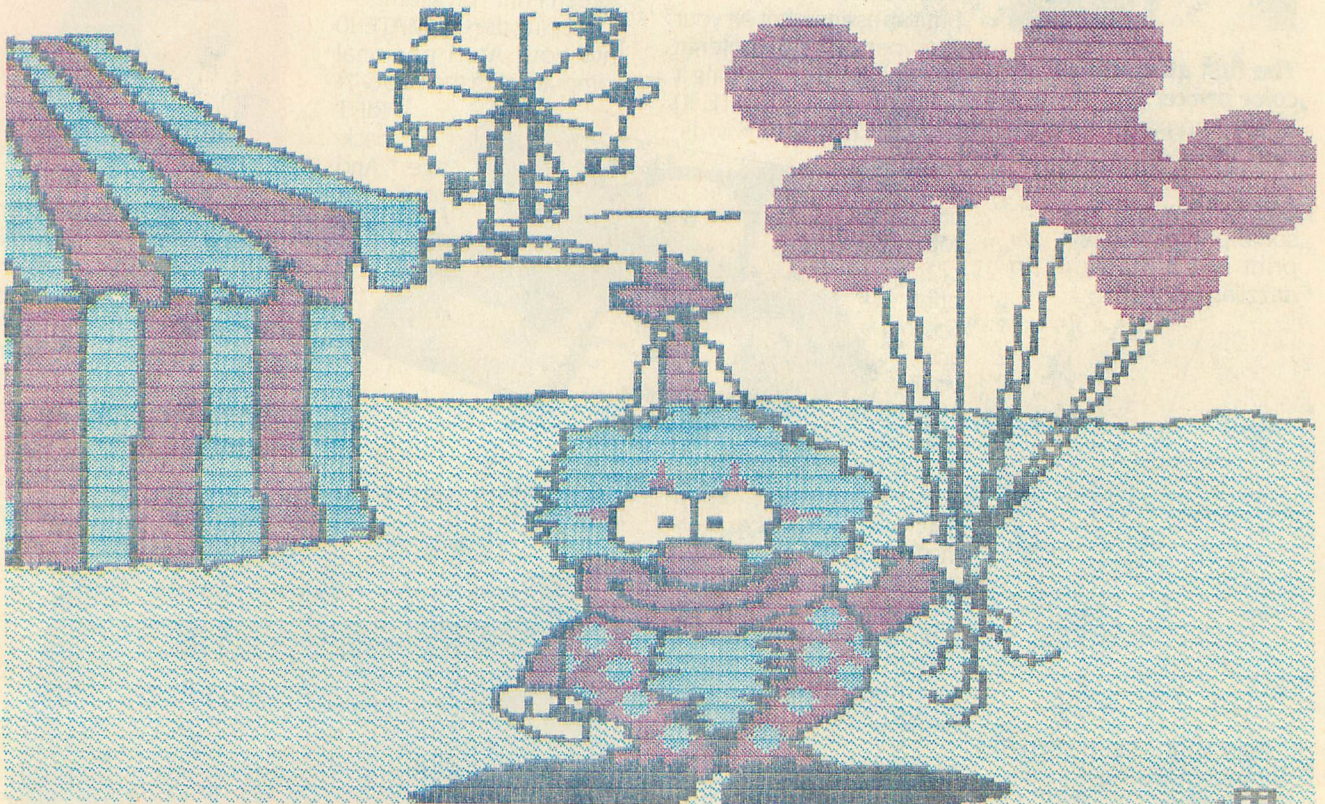

Seiksha Color Printout

Seiksha Text

The quality of dot-matrix printers varies. Low quality letters will typically look like a pattern of dots with lots of space between each dot. This is that "funny computer type" people talk about, and is typical of early dot-matrix.

image and black-ink text printouts.

OKIMATE

The Okimate 10 comes with a BASIC program that will make color printouts from most Micro Illustrator and Super Sketch picture files. The program can only be used with an 800 XL computer, or a 600 XL computer with a memory expansion board. You'll also need a copy of DOS 2.0S.

The Okimate is a small, quiet thermal printer—that prints 8" x 5 1/4" color images on either single sheet or tractor feed paper. Once we loaded the program, it took 35 minutes to reproduce our sample Micro Illustrator screen. You must choose colors carefully, if you want your final print to resemble the original screen display. The program can accurately represent only 15 of the Atari's 128 available colors.


Okidata technicians said a 128-color version of the printer pro-

gram would be available later this year.

The printer's "once through" color ribbon cartridge (\$6.69) contains enough ink for about five microscreen prints.

SEIKOSHA

The Seikosha is considerably larger, noisier and more expensive than the

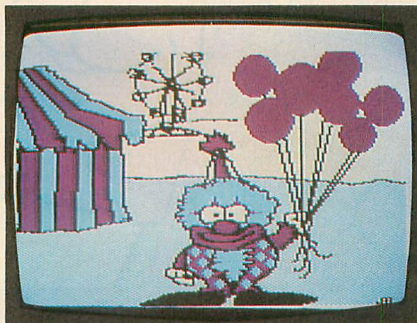

Microscreen Photo

Okimate—but it runs five times faster. The Seikosha took only seven minutes to print our sample 8" x 5 1/4" color image, and two minutes to generate

a 4" by 2-5/8" image.

The Seikosha accepts MicroPainter, Graphics Master, Graphics Magician and any other 62-sector Graphics 7.5 or Graphics 8 picture file, and can be used with any Atari computer having at least 48K of memory.

The Seikosha's rewindable ribbon cassette holds four small inking cartridges. When a color is used up, only its cartridge need be replaced. Manufacturers claim each ribbon cassette can print the equivalent of 500 full-page letters.

OKIMATE 10

Okidata Corp.

532 Fellowship Rd.

Mt. Laurel, NJ 08054

(609) 235-2600

SEIKOSHA GP-700A


Axiom Corp.

1014 Griswold Ave.

San Fernando, CA 91340

(800) 232-9466

(213) 365-9521

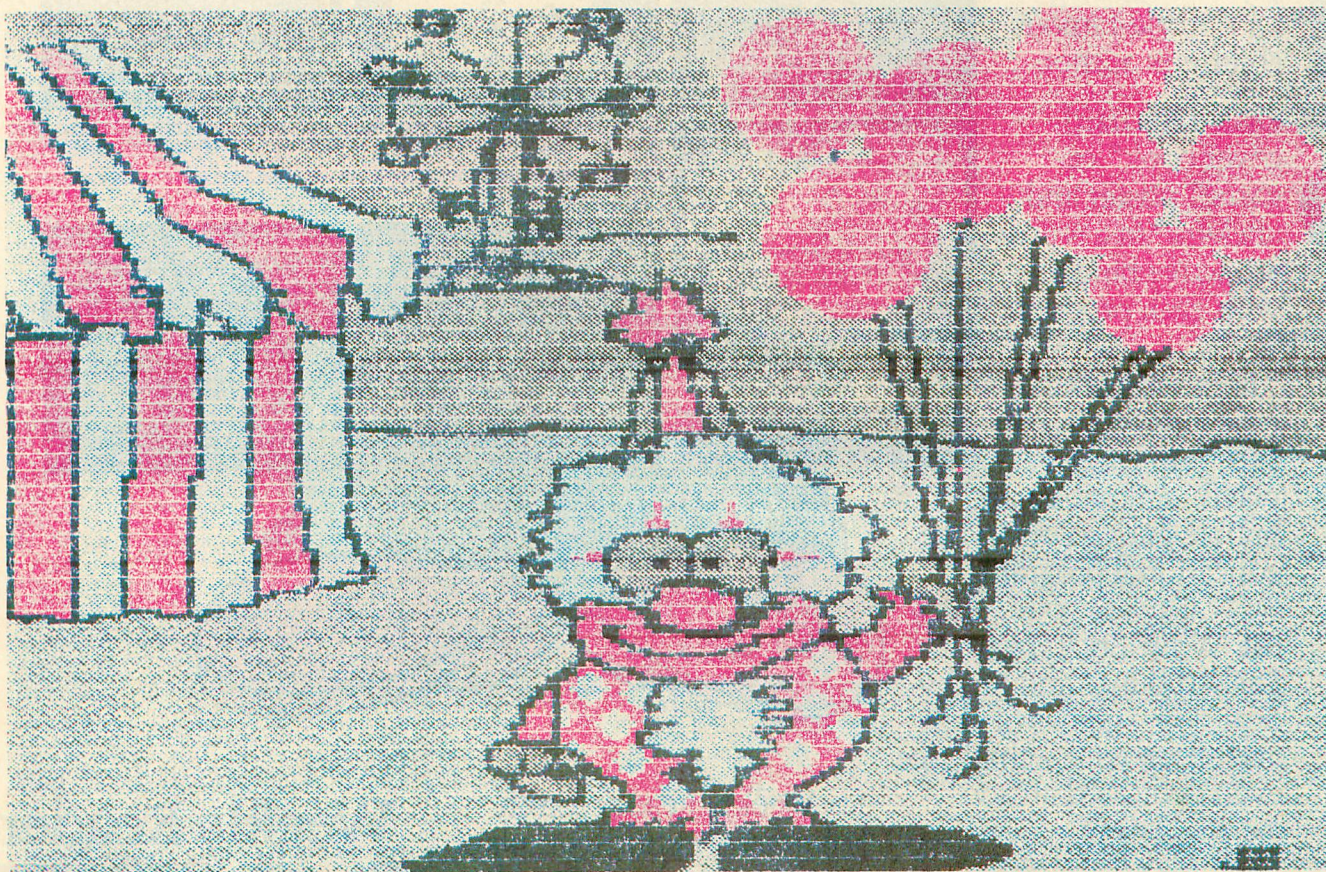

Okimate Color Printout

Okimate Text

The quality of dot-matrix printers varies. Low quality letters will typically look like a pattern of dots with lots of space between each dot. This is that "funny computer type" people talk about, and is typical of early dot-matrix.



The Bearfacts:

Now, you can get...

- 1 NEW software programs featuring Stickybear,[®] the hottest-selling computer bear in America.
- 2 Sophisticated color graphics for Commodore 64, Apple[®] and Atari[®], with 48 K.
- 3 Arcade-quality games for families to play together.
- 4 New fun learning programs for 5- to 9-year-olds created by a world-famous children's author.
- 5 Disk, plus hard-cover book* or game,* poster and stickers* in a sturdy, attractive binder – with each program.




Early Learning



NEW Stickybear Reading (ages 5-8)



NEW Stickybear Math (ages 6-9)




NEW Stickybear Spellgrabber (ages 6-9)



NEW Stickybear Typing (all ages)

Games for the family

Stickybear Basketbounce



Stickybear Bop



There's something new for everyone in your family! The playful animation and bubble-gum colors in the educational programs will captivate your youngest. While Stickybear Basketbounce and Stickybear Bop – games of skill and sharp wits – challenge even dedicated arcade games-players.

Look for Stickybear software – developed by Optimum Resource, Inc.

for Weekly Reader Family Software – in finer computer stores everywhere. Or, call toll-free 1-800-852-5000, Dept. AM-25.

Weekly Reader Family Software

A division of Xerox Education Publications
Middletown, CT 06457

Stickybear is a registered trademark of Optimum Resource, Inc. Commodore, Apple, and Atari are registered trademarks of Commodore Electronics, Ltd., Apple Computer, Inc., and Atari, Inc., respectively.

*Apple and Atari only.

ANTIC 1985 PRINTER GUIDE

continued from page 28

printing from the computer as you watch the output. But this is impossible with a buffer that's always on.

C. ITOH F10 STARWRITER

The **Starwriter** (\$1795) is an impressive workhorse of a printer. Solidly built, it is noted for an overall lack of failures and service problems. Beyond having all the standard features of a top-notch printer, it is supported by a major manufacturer of printer/computer peripherals.

Although the list price is \$1795, some stores sell this printer for \$1295, and catalogs have listed the Starwriter for \$949.

Ribbons and daisywheels for the Starwriter are common items used by many major printers—Qume and Sprint wheels and Diablo ribbons.

The Starwriter's one drawback is that its documentation is just barely adequate. The manual looks like unedited technical notes, with little help for the new user. There's plenty of information, but it's presented very badly.

PRINTER ACCESSORIES

The following is a list of leading printer accessory products designed especially for Atari computers. Here you'll find those essential cables and interfaces, memory buffers that free your computer during a long print-out, and software for printing graphics dumps or the Atari special characters.

Microprint: Parallel printer interface, acts as replacement for 850. Plugging directly into serial bus, it works with full line of Atari computers and is compatible with NEC, Epson, Prowriter, etc. \$69.95.

MPP-1150: Basically an upgrade of the Microprint. Comes with serial and parallel plugs and 2K printer buffer. \$89.95.

MicroStuffer: 64K printer buffer \$149.95.

Microbits Peripheral Products. 225 Third Ave. SW. Albany, OR 97321. (503) 967-9075.

Parallax-AT Printer Interface: Connects any parallel printer to an Atari XL Compatible. Works with all parallel printers and software. 2 year warranty. \$89.

Axiom Corp. 1014 Griswold Ave. San Fernando, CA 91304. (818) 365-9521.

U-Print: Low-cost printer interface. Works with all popular printers such as Epson, Gemini and NEC. Compatible with all Atari hardware & software. \$89.95.

Printer Buffer: User-upgradable memory (16 to 64k) allows you to store up to 32 pages of text, freeing your Atari for more important tasks (like Lode Runner). Compatible with U-Print and all Atari computers. 16k—\$119.95, 64k—\$179.95.

Digital Devices. 430 10th St. Suite N205. Atlanta, GA 30318. (800) 554-4898 (Outside Georgia). (404) 872-4430 (Inside Georgia).

Printwiz: All-purpose graphics dump and program lister that works with all Atari-compatible printers and interfaces. Lets you list control and inverse characters, and dump screens created in BASIC, LOGO and graphics programs such as Micropainter and Paint. 16K-disk. \$29.95.

Allen Macroware. P.O. Box 2205. Redondo Beach, CA 90278. (213) 376-4105.

Lister Plus: This is the software Antic uses with a Gemini 10X printer for the program listings you see in the magazine. It dumps any listed file to printers, using any character set you choose. 48K-disk, requires BASIC. \$19.95.

Picture Plus: Converts various types of picture files, including Micropainter and Micro Illustrator, into a format that can be used with your own BASIC program or dumped to a printer in four different sizes. 48K-disk, requires BASIC. \$29.95.

Non-Standard Magic. P.O. Box 45. Girard, OH 44420. (216) 539-6033.

Megafont II: Program lister and graphics dump. Allows you to list in-

verse and control characters, etc., from a BASIC program. Also dumps Gr.7+ and Gr.8 screens. Works with NEC, Prowriter, Epson w/Grafrax, and similar printers. 48K-disk. \$24.95.

Xlent Software. P.O. Box 5228, Dept. B. Springfield, VA 22150. (703) 644-8881.

Magniprint: Reproduce your artistic genius in any size, from 1/8 of a page to giant wall-size posters, or enlarge and print any part of a screen. Works with B-Graph, Micropainter, Fun With Art, Koala, etc, compatible with Epson, NEC, C. Itoh Prowriter and Gemini printers. 48K-disk. \$20.95. Alpha Systems. 4435 Maplepark Road. Stow, Ohio 44224. (216) 374-7469.

MANUFACTURER INFORMATION

C. Itoh

19750 South Vermont, Suite 220
Torrance, Ca. 90502
(213) 327-2110

Brother International

20 Goodyear Place
Irvine, Ca. 92714
(714) 859-9700

Atari Corp.

1265 Borregas
Sunnyvale, Ca. 94088
(408) 745-2000

Epson America

2780 Lomita Blvd.
Torrance, Ca. 90505
(213) 539-9140

Star Micronics

888 Washington Street
Dedham, Ma. 02026
(617) 329-8560

Hewlett Packard

Inquiries Manager
1020 NE Circle Blvd.
Corvallis, Or. 97330

Okidata

Mt. Laurel, NJ 08054
(609) 235-2600

Axiom Corporation

1014 Griswold Ave.
San Fernando, Ca. 91340
(818) 365-9521



SECRETS OF ATARIWRITER

(and Atari printers, too!)

by CASSIE STAHL

An authoritative compendium of never-documented techniques for using AtariWriter word processing software, written by a former Atari insider. Plus little-known methods for getting more out of Atari-made printers.

A lot of the early software for Atari Computers contained hidden messages, secret rooms and other surprises that Atari personnel called Easter eggs. These surprises managed to creep into "finished and tested" software although they were never officially approved by Atari management.

The main reason for these little surprises was Atari's reluctance to include programmers' names on the software package. For many programmers, the temptation to identify their work was too great, and they inserted their own secret markings in many different ways.

AtariWriter is especially notorious for including features that were never documented in the manual or made public. The secrets in this article may be only the beginning. Perhaps there are other "Easter eggs" I have missed. Please write **Antic** and let everybody know if you have discovered any other Secrets of AtariWriter.

1. FORM LETTERS

There are actually two different ways to create form letters with AtariWriter.

The worse method found its way onto page 39 of the manual, under the heading FORM PRINTING.

With this technique you insert a special code in the document that stops printing. When the printer halts, you keyboard in the new information and it's printed as soon as [RETURN] is pressed.

The problem is that you have to sit and wait for the page to stop printing before inserting the information for the next letter. Here's the undocumented better way:

SECRET MAILMERGE

We will start by creating the shell document file. Type the letter below. The [OPTION][INSERT] key combination marks the location for text to be automatically inserted later.

[OPTION][INSERT]

[OPTION][INSERT]
[OPTION][INSERT]
[OPTION][INSERT]

Dear [OPTION][INSERT]:
Thank you for visiting our store during the holidays. Included in this letter is a coupon for \$25 off any Atari equipment purchased before April 1, 1985.

Sincerely,

Mrs. Store Owner
11 Main St
Anytown, City 99999

The first [OPTION][INSERT] is the date. The next three [OPTION][INSERT] lines mark the name and address of the person receiving the letter. The last [OPTION][INSERT] puts in the right name after the salutation. Save this shell document to disk and call it FORM.

The second file to create is the database. After selecting CREATE FILE from the main menu, type in data in the exact order you want it to print.

Type in the date and press [RETURN]. On the second line, type the name Jeff Roberts and again press [RETURN]. Type 101 Main Street on the next line and press [RETURN]. Next type San Francisco, CA 99999 and press [RETURN]. For final line, type in Jeff. This is the first record in our database.

To add more records into the database, simply type in another line of information for each [OPTION][INSERT] in the letter. Don't leave any empty lines between records, the computer will interpret these as blank lines.

After all the names and addresses on your mailing list are entered into the computer, you can press the [ESC] key and select SAVE FILE from the main menu. Call this file DATA.

Once the DATA file is saved to disk, you can select the LOAD FILE option and move your FORM file into memory. Select PRINT from the main menu and answer the prompts carefully.

As the printer encounters an [OPTION][INSERT] in the letter it will pause and ask you to MAKE ENTRY, HIT RETURN. Press the [CONTROL] key and the [V] key at the same time. Then type in D1:DATA and press [RETURN]. The disk drive should begin whirring and the information from the disk will be included in the letter.

2. ELECTRONIC MAIL

If you have an old Atari 830 modem and TeleLink cartridge you can use AtariWriter to upload and download! This method may also work with other modems, as is or with modifications, but the only hardware compatibility I can personally vouch for is the 830 with TeleLink.

In this example, let's say I am going to send you a file and you are going to receive it through your 830. We will both need to do some preliminary setting up. First we turn on our 850 interface modules, disk drives

and 830 modems. Set the 830 modem to half duplex. If you have your original Master Disk with the AUTORUN.SYS file on it, you can insert that into your disk drive. If you do not have AUTORUN.SYS, see the suggestions in this issue's I/O Board section.

After you have placed your AtariWriter cartridge in your computer, turn the volume on your monitor up and turn on your computer. The drive will begin whirring and you should hear beeps coming out of the monitor. If the initial title screen is red, it means that DOS is not on the disk that was inserted the drive. If the title screen is blue, it means that DOS is loading properly.

FOLLOW THESE STEPS

As soon as we have each other on the telephone, I will load my transmission file into my computer. I simply select LOAD FILE from the main menu, enter a D:FILENAME after the prompt and hit [RETURN]. You will need to

select CREATE FILE from your main menu screen. The CREATE FILE command will take you to the typing area of AtariWriter. To exit, you must press the [ESC] key. You will also have to select LOAD FILE from the main menu.

After the prompt you should type in R1: and then switch your modem to ANSWER mode. Place your phone in the handset and press [RETURN].


Next I will select SAVE from the menu, type in R1: and push [RETURN]. If things are working, I will hear a buzzing noise that tells me your modem is placed in the handset. Do not worry if you don't hear the sound, sometimes it's hard to hear.

Now I'll switch my modem to ORIGINATE mode and place my phone in the handset. When I press [RETURN], I will hear a beeping noise coming out of my monitor, which means data is being transmitted successfully.

When your screen prompts you

continued on next page



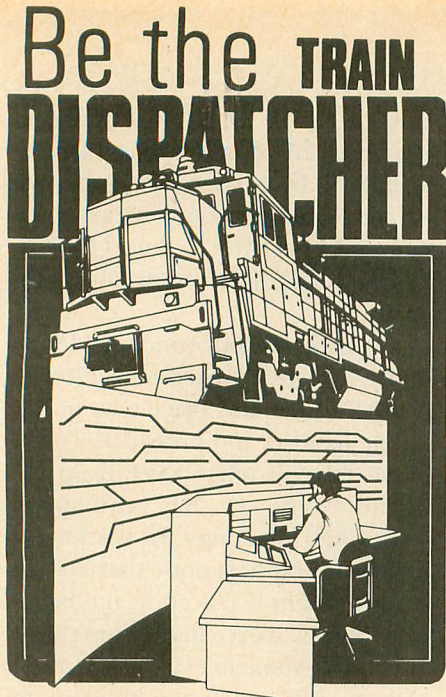

Play this fast-paced computer video game that's so true-to-life that a major railroad indicated they use it in dispatcher training.

TRAIN DISPATCHER's 24 displays help you make crucial decisions, RAPIDLY. You're under pressure, but in control — throwing switches, clearing and cancelling signals, constantly maneuvering both east and westbound trains. Keep the tracks clear ahead of all your trains and watch your score go up!

Action packed, yet non-violent, TRAIN DISPATCHER's 5 levels of play challenge players from age 8 to 80. Work your way up from "Cub Dispatcher" to Chief Dispatcher" or even "Train-master."

Created by designers of computerized traffic control systems for operating railroads, TRAIN DISPATCHER will increase your appreciation for actual railroad operations.

TRAIN DISPATCHER comes complete with Instruction Manual and keyboard template.

Color TV Recommended

25

CHECK ONE:

- Vic 20™ Tape or Disk
 (Requires 16 K Memory Expander) ... (\$24.95)
 Atari® 800 Tape or Disk
 (Requires Basic) (\$24.95)
 Atari® 400 Tape
 (Requires Basic) (\$24.95)
 Commodore™ 64 Tape or Disk (\$24.95)
 Apple II®, II+ and IIe Disk (\$29.95)
 Manual Only (\$4.00 if purchased separately)

Name _____

Street _____

City _____ State _____ Zip _____

USA & CANADA add \$2.50 postage & handling (\$4.00 foreign) for each game ordered. All payments must be in USA funds, all foreign payments must be against USA banks. PA residents add 6% state sales tax. Or charge to:

Master Card VISA Exp. Date _____

Card No. _____

Signature _____

SEND TO:

SIGNAL COMPUTER CONSULTANTS, LTD.
 P.O. Box 18222 • Pittsburgh, PA 15236
 (412) 655-7727

with SELECT LETTER, type [E] to edit the document. This will show you the document in the typing area. If you just want to save it to disk, press the [ESC] key and select SAVE from the main menu. Type in D1:FILENAME at the prompt.

That's all there is to it. If you find that it doesn't work the first time, try again and go through the steps a little more slowly.

3. ATARI PRINTING SECRETS

825 BOLD PRINTING

Some commands can be used to do more than they were intended for. The superscript command causes the printer to back up half a line and print. If two of these commands are used together, the printer backs up one whole line—the same line it just finished printing. So if you type in the same words before and after the two superscript commands, you can get the letters printed over twice. Instant boldface on your Atari 825 printer!

1025 ELONGATIONS

To print elongated characters with the 1025 printer you need to set [CONTROL][G] to [3]. To turn off the elongated characters type in [CONTROL][G] followed by a [1] for 10 characters per inch (cpi), or a [2] for 16.7 cpi. The usual [SELECT][E] command will not create elongated printing on the 1025.

TIPS FOR THE 1025 AND 1027

To print with single sheets of letter paper on your Atari 1025 or 1027, insert the [CONTROL][W] page wait command at the beginning of the document under the print formatting line. The printer will pause at the end of each page, and you can insert a new sheet of paper. Press [RETURN] when you're ready to start the next page. NOTE: For the 1025, first tape down the Paper Out switch on top of the printer towards the upper left.

International characters can be accessed on the 1025 and 1027 by in-

serting a [CONTROL][O] (capital letter) [27] followed by [CONTROL][O][23]. This activates the international character mode. As each character is needed, you have to use the [CONTROL][O] and the decimal code for that letter. These codes are listed in your printer manual.

1027 MYSTERIES

The 1027 has an unusual quirk. It sometimes stops printing for no apparent reason. Try not to worry when your printer falls asleep on you. Just leave it alone and it will recover in about 4 1/2 minutes. When it awakes, it will begin printing right where it left off.

Also, the 1027 does not underline when inverse video is used. Select printer number one from the main menu and insert [CONTROL][O] (capital letter) [15] where you want the underline to begin and a [CONTROL][O] [14] where you want the underline to end.

If your margins have been brought in closer than the default values, the underline starts from the far left of the paper. The easiest solution is to adjust the margins. If this is not possible, you can turn off the underlining after the last word on the line, and turn it back on for the first word on the following line.

Never use labels in your Atari 1027 printer. They can easily peel off their backing and stick to the delicate inner workings of the printer. When the 1027 gets repaired, the entire print head mechanism is removed and replaced. It can be costly. Instead, you can use your 1027 to make a label template on plain paper, but reproduce the finished labels on a photocopier, using special peel-off sheets that work with most copying machines.

When Atari had its own bulletin board for users groups, Cassie Stabl ran it. She is now the documentation writer for a major Macintosh software publisher.



microscreens




If we publish your Atari computer art on our Microscreens page you get an Antic T-shirt. Send your pictures to **Antic** on disk or cassette. Include loading instructions on a short note telling us about yourself and which graphics tools you use . . . also enclose your two choices of T-shirt size and color. And if you want your material back, be sure to send a stamped self-addressed return envelope.

Pencils is in Graphics 3 mode, uses 4 players, GTIA, display list interrupts and takes 30 seconds to draw itself on the screen. Microartist Gregg Tavares has done a professional arcade conversion for AtariSoft and lives in Provo, Utah. Antic Disk subscribers get the file as a bonus.

Pauline Murabayashi obviously drew **Winter** from her imagination, since she is from Hawaii. **Antic** published another of her pictures in February 1984. She uses Datasoft's Graphic Master.

Window is a KoalaPad image from Robert Robinson, an art and computer graphics teacher at a Long Island high school. This scene is from his home in Setauket.

Edwin Reveche of Baldwin Park in Southern California used his own BASIC drawing program and overlays to make this fantasy adventure scene, **Lilworm**.

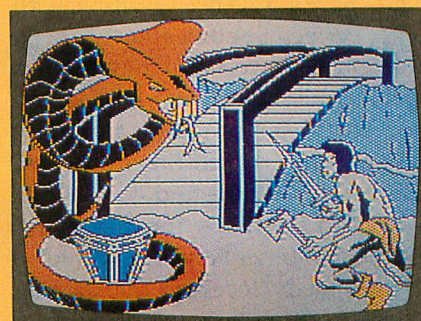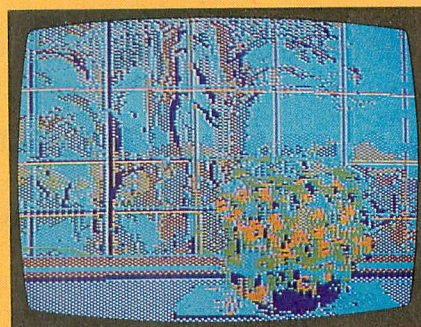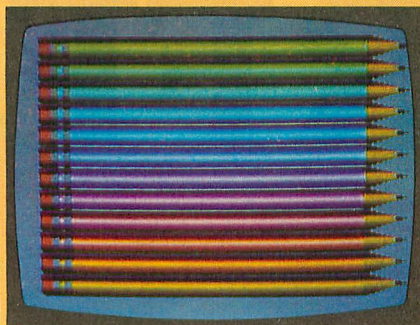

LETTER PERFECT

IMPROVED

Version 6 has more perfection

by GEORGE JACOBS

Atari owners will be glad to learn that LJK, Inc. has done it again! In their Version 6 they've added new features to an already successful word processing program and made it even more versatile. They've also come up with an improved manual. A newcomer to word processing can figure out how to work the program without outside assistance. The manual requires some close study but the benefits are worth it.

Those familiar with earlier versions of **Letter Perfect** will know there was very little it couldn't do in text writing with ease and accuracy. Headers (repeating page titles), automatic page numbering, change of type styles at will, various simple methods to correct mistakes and add or subtract text — all the standard features of any decent word processing — have always been available with **Letter Perfect**. **Spell Perfect** has been available since version 1 and it makes spelling mistakes a cinch to find and correct. The improvements are largely enhancements of existing features to allow faster editing and correcting.

If I had to choose the niftiest adjustment to **Letter Perfect**, it would be in the speedy access to the spelling checker, which is now incorporated

in the master disk. As soon as text has been written, the writer can have it examined by the computer even before writing the file to disk. This saves several steps common to most spell checking procedures. When you have enough material to keep, you go directly from "editing" to "dictionary" and the words are counted in seconds. At that point, the computer begins a search in a dictionary disk and helps you make corrections where necessary.

EASY CURSOR

The next important improvement is in the speed with which the cursor can move through a text. Now **Letter Perfect** will allow you to move a word at a time in either direction, instead of only one space at a time as before. You can jump forward by paragraphs too, and also to a marker which you can place anywhere in the text. You can have any number of markers too. You could always move one video screen page at a time, but even this action is smoother and easier on the eyes than it used to be. You can delete a word at a time in either direction, or any of a paragraph following the cursor. The deletion up to the marker feature is also a big help in editing large chunks or shortening files.

Letter Perfect menus are now faster to order from. To tell the computer to load or save, move the <pointers> or type the first letter of any choice. Not only do the <pointers> go directly to the new choice but the order is fulfilled without hitting the return key and the name of the file in editor is displayed.

Another new attraction is a command which will prevent the separation of a paragraph into portions of two pages. This is particularly attractive to those of us who want to incorporate small drawings or pictures into text. After juggling margins and line widths to design a nice spot for an insert, it's disconcerting to see it made useless by crude cropping.

EASY DENSITY

Letter Perfect has made it much easier to go back and forth between single and double density. Double density will expand the storage capacity of your floppies. Using double density is like writing a long letter on a post card by condensing your penmanship. The information will still be the same and the print size will also be its usual dimensions. Single density **Letter Perfect** files, therefore, can be made to take up half the space by con-

continued on page 41

Turn your Atari into a Ferrari.

Introducing the all-new Indus GT™ disk drive. The most advanced, most complete, most handsome disk drive in the world.

A flick of its "Power" switch can turn your Atari into a Ferrari.

Looks like a Ferrari.

The Indus GT is only 2.65" high. But under its front-loading front end is slimline engineering with a distinctive European-Gran flair.

Touch its LED-lit CommandPost™ function control AccuTouch™ buttons. Marvel at how responsive it makes every Atari home computer.

Drives like a Rolls.

Nestled into its soundproofed chassis is the quietest and most powerful disk drive power system money can buy. At top speed, it's virtually unhearable. Whisper quiet.

Flat out, the GT will drive your Atari track-to-track 0-39 in less than one second. And when you shift into SynchroMesh DataTransfer™ you'll increase your Atari's baud rate an incredible 400%. (Faster than any other Atari system drive.)

And, included as standard equipment, each comes with the exclusive GT DrivingSystem™ of

software programs. World-class word processing is a breeze with the GT Estate WordProcessor™. And your dealer will describe the two additional programs that allow GT owners to accelerate their computer driving skills.

Also, the Indus GT is covered with the GT PortaCase™. A stylish case that conveniently doubles as a 80-disk storage file.

Parks like a Beetle.

The GT's small, sleek, condensed size makes it easy to park.

So see and test drive the incredible new Indus GT at your nearest computer dealer soon.

The drive will be well worth it.



INDUS™



The all-new Indus GT Disk Drive.

The most advanced, most handsome disk drive in the world.



Make April 15th just another day. Get The Tax Advantage.™

The #1 best-selling tax program

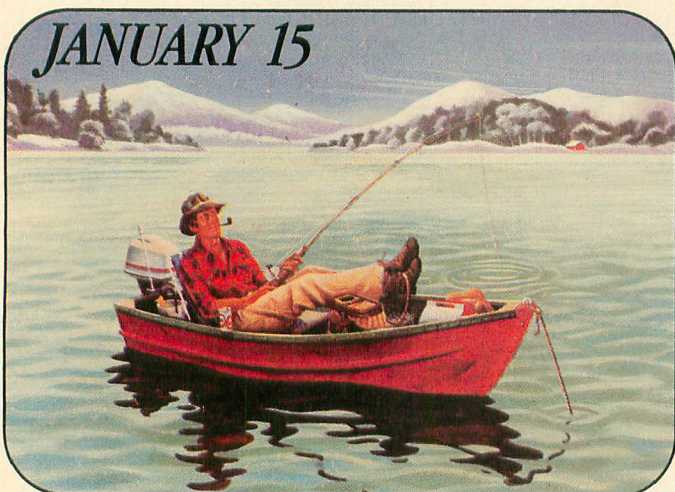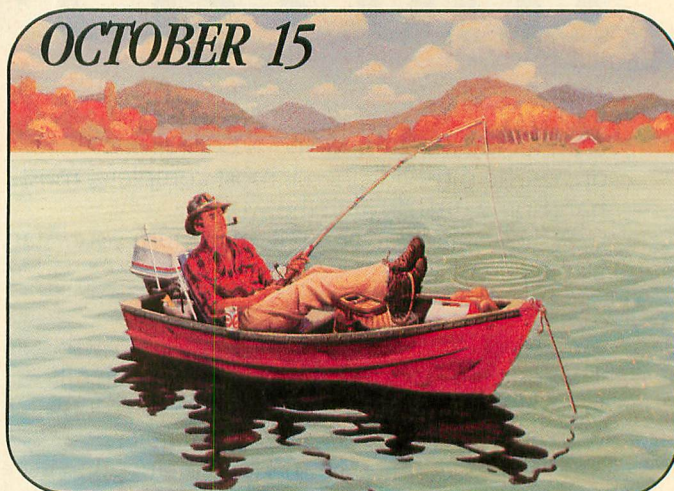

April 15 doesn't have to throw you into a cold sweat anymore. Now you can sail through the task you've been dreading all year long. With **The Tax Advantage**.

This program is so easy, you'll be able to use it right away. Even if you've never done your taxes by yourself or used a computer before.

HERE'S HOW IT WORKS

The Tax Advantage takes you line-by-line through Form 1040 and the other most common tax forms. It asks you for information in plain English, and you type in the numbers. Additionally, all forms and schedules (except Form 1040) are printed in IRS acceptable format. Simply staple your printout to your 1040 and mail. That's all there is to it.

The Tax Advantage

automatically computes your taxes with each entry you make. So you know exactly how each line affects your overall tax picture.

Additionally, **The Tax Advantage** does complex operations like income averaging and the new Alternate Minimum Tax with a few simple commands.

What's more, you can use these features to help you plan what your tax would be if your income, deductions or other figures changed.

And each year, as tax laws change, you (as a registered owner) can get the newest version of **The Tax Advantage** at a special rate.

If you think **The Tax Advantage** sounds fantastic, you're right. But there's more.

THE TAX ADVANTAGE "TALKS" TO THE HOME ACCOUNTANT.™


If you own *The Home Accountant*, the #1 best-selling home finance program, you can transfer your records to **The Tax Advantage** at tax time. It'll make doing your taxes even faster.

You'll be surprised how simply and efficiently you'll knock off the dreaded tax return.

So get **The Tax Advantage**. And have a terrifically ordinary April 15.

The Tax Advantage is available for: Apple II/IIe, Atari 800/800XL, IBM PC/PC XT/PCjr, and Commodore 64.

Suggested retail: \$69.95



For your free product brochure call or write:

**Arrays, Inc./
Continental
Software**

Dept. AT, 11223 S. Hindry Avenue
Los Angeles, California 90045
Business Office (213) 410-3977

LETTER PERFECT IMPROVED

continued from page 38

verting them to double density on another disk.

The TAB key no longer deletes text as it shoots across your screen. This is a big help in zeroing in on number tables and also cuts down on accidental word deletions. The simple search command now pauses at the expression you are looking for and allows you to correct it without having to use a search and replace command.

PRINTER SET-UP

I've saved the clincher for last. Letter Perfect costs just under \$100! Atari computers are great value for money these days and with a disk drive, interface and printer, you can set up a true word processing facility for under \$1000 — compatible with Spell Perfect and Data Perfect too.

What's more, you can use just about any printer on the market. Although

it formerly came with a separate "printer editor" floppy, the Letter Perfect master disk now includes built-in options for nine popular printers. If you choose a non-listed machine, the disk provides an easy system for setting up your own specifications to make your printer function properly. Letter Perfect will drive dot matrix or letter quality printers including those with proportional spacing.

When you boot up your Version 6, you can enter your specifications for the types of writing you do the most often. For example, you can program a letter writing set of commands. Set "j0" for no justification, "l2" for single line spacing (that's a small "L", not a "one"), width of page that you prefer, etc. . . . Then you can save this to one of the six different printer programs listed. Make another program for texts *with* justification, double spacing and so forth. Instead of re-

calculating every different job, you simply boot in the printer program of your choice and go to it.

LETTER PERFECT VERSION 6

LJK, Inc.

7852 Big Bend Blvd.

St. Louis, MO 63119

(314) 962-1855


\$99.95, 32K — disk

George Jacobs is a professional author, artist and photographer living in Woods Hole, MA. He has owned and extensively used an Atari for two years.



FROM

SENECOM



THREE
PDQ DISKS
AND A NEW
FUTURE
\$9.95

There is untapped potential in your Atari. And, perhaps, in you. . .

We'd like to share an opportunity too unique and worthwhile to describe in an ad. We're offering this remarkable bargain so you can see it for yourself without risk.

Order three PDQ (Premium Disk Quality) Disks (DSDD, 21-year Warranty) for only \$9.95. The front of each disk is ready for you to format and use. Boot in the program on the back (min. system: 48-K), and you may be surprised at what your Atari tells you.

Order PDQ! Write "PDQ" on a paper, with your (legible!) name and address; send with \$9.95 (We'll pay the shipping for USA and Canada. NYS residents add 7% Sales Tax) to:

SENECOM

Dept. 14

13 White St.

Seneca Falls, N.Y. 13148

Limit: one order per address, please.

Atari® is a registered trademark of Atari Corporation.

Senecom® is a registered trademark of Seneca Computer Company, Inc.

Put a Monkey Wrench into your ATARI 800 or XL

Cut your programming time from hours to seconds, and have 33 direct mode commands and functions. All at your finger tips and all made easy by the MONKEY WRENCH II.

The MONKEY WRENCH II plugs easily into the cartridge slot of your ATARI and works with the ATARI BASIC.

Order your MONKEY WRENCH II today and enjoy the conveniences of these 33 features:

- Line numbering
- Renumbering basic line numbers
- Deletion of line numbers
- Variable and current value display
- Location of every string occurrence
- String exchange
- Move lines
- Copy lines
- Up and down scrolling of basic programs
- Special line formats and page numbering
- Disk directory display
- Margins change
- Home key functions
- Cursor exchange
- Upper case lock
- Hex conversion
- Decimal conversion
- Machine language monitor
- DOS functions
- Function keys

The MONKEY WRENCH II also contains a machine language monitor with 16 commands that can be used to interact with the powerful features of the 6502 microprocessor.


MAE

An easy to use but powerful Macro Assembler/Editor. Includes M.L.

Monitor, Word Processor and more. **The Best for Less!**

Now Only \$59.95.

(For use with ATARI 800 or XL and Disk Drive.)

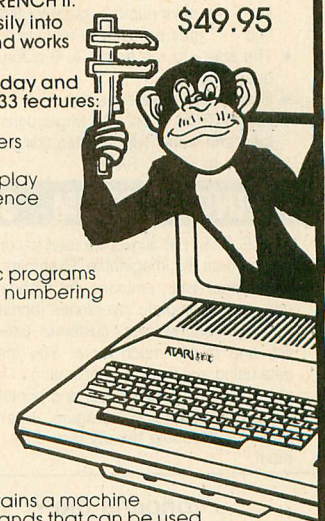


Eastern House

3239 Linda Dr.
Winston-Salem, N.C. 27106
(919) 748-8446

GREAT VALUES

ASTRA 1620 ...



LIMITED QUANTITIES

\$399.00

PLUS \$10.00 SHIPPING

INCLUDED ...

**HOMEWRITER
SMARTDOS
AT NO EXTRA CHARGE**

ASTRA 2001 \$595.00

SMARTDOS \$39.00

- SMARTDOS is 100% density smart. SMARTDOS will sense the density of each disk in use and automatically reconfigure the entire system to that density.
- SMARTDOS does not require that a "system disk" has to remain in the drive, or be continually inserted and removed in order to use the DUP.SYS commands.
- With SMARTDOS you may Copy with query, (eliminates specifying each item individually).
- Counter screens - which keeps the user informed as to what the system is doing and where in the task the system is.
- Disk testing for bad or unusual sectors that may be corrected.
- RESIDUP feature allows simple yet powerful full time availability of DUP.SYS commands while leaving your program intact and ready to RUN.
- Minimum keystrokes for maximum power, e.g. a disk directory is done by pressing only one key - the drive number (great for filesearches), and "=" may be used to replace ".".
- The ability to run from 1 to 9 autorun files sequentially.
- Built in disk drive speed check.
- SMARTDOS is only 34 single density sectors long and works with all Atari computers with a minimum of 24K RAM.

FILING SYSTEM \$39.00

FILING SYSTEM allows the user to configure any type of data file imaginable. Examples are recipe cards, mail lists, reminders for birthdays, check-ups, etc..., complete inventories (home and business), personnel files, customer call-ups, price list, and much, much more. You may retrieve data using any field or combination of fields. Files also may be saved, sorted, and printed in a preset format that you configure. Uses either a single or a double density disk drive. 24K minimum.

(ORDERS ONLY)

MasterCard/VISA
The Programmers Workshop
5230 Clark Ave., Suite 19
Lakewood, CA 90712

100 ITEM CATALOGUE

CUSTOM PRINT

continued from page 21

The next prompt is for the drive number that the text file is on. If you chose not to use a custom c-set, this will be the next input after bypassing the c-set loader routine. Press the key for the desired disk drive number 1-4. Again a directory of that disk is displayed on the screen. You will then be requested to input the text filename again. All the same options are available.

FORMAT SELECTION

The file must be either a LISTed program file or a text file with a carriage return (character 155) imbedded every 255 characters. Typically you will print LISTed BASIC programs. I frequently use Custom Print with a simple BASIC text editor to create exotic title pages for my articles, or print fancy letters to friends.

After a valid filename is given, you will be asked for the number of print characters per line. NEC users have no options here. The NEC has only one graphics dot density, which works out to the 60 characters per line print mode. Gemini users have the option to print with 60, 120, or even a tight-packed 240 characters per print line. This latter print density is just a bit tough on the eyes. But since the Gemini supports a quad density dot graphics mode, I decided to implement it in the program. Epson owners have only the first two options. Modify listing 1 as follows:

```
260? "[4] 60 [2] 120 " :;G  
ET #2,A: ? CHR$(27) : CHR$(A)  
270 A=A-48: IF A<1 OR A>2 T  
HEN ? "VALUE ERROR!": GOTO  
260
```

The 60 characters per line makes the most readable listings. They are slightly oversized characters in comparison to the normal printer characters. The 120 characters per line is quite readable too. It is best for BASIC program listings, since BASIC allows a maximum of 120 characters per line. Each program line will appear on one print line in the listing without wrap-around. Gemini owners may get a kick out of the 240 characters per line print mode, but it is very difficult to read.

Custom Print then prompts you for vertical line spacing. Option one is "stacked" print. This means that each line is printed just above the next, exactly as characters appear on the Atari screen. This is ideal for printing out control-character graphics text files. Some of my sysop friends (Bulletin Board System Operators) use the 120 character per line, stacked print mode for program listings. Modifying their BBS programs as frequently as they do can eat up a lot of paper, but this print format is quite paper-efficient. Option two selects single spaced print, which is most commonly used for program listings.

CENTER OR JUSTIFY

Next you are prompted for text positioning. The first option selects centering of text. I commonly use this option when making title pages. Block left, the second option, is the most commonly used print style. Block right is a bit unusual. You might consider using this for listings you intend to put in a binder.

The next step is title input. If you do not want a title, just press [RETURN]. Next you will be asked if you wish to skip perforations. If your answer is yes, the listing will be paginated without title or page numbering. Suppressing perforation skipping allows you to print continuous labels from preformatted text files. This is commonly used by sysops who keep extensive user group disk libraries. If a title is input, it will be printed at the top of each page along with page number. I usually use the title for the program name, revision number, and listing date.

Finally you will be asked to double check your printer and disk drive to be sure all is ready. Then press the [RETURN] key to begin printing. Once started, if you change your mind for any reason, just press the [ESCAPE] key to abort the printing. If a custom c-set was chosen, this c-set will be enabled as the file is printed.

After the file is printed, or print aborted, you will be prompted to continue listing files or quit. If you quit, the program will restore the memory

it had previously reserved for custom c-set data. This precludes the need of pressing [SYSTEM RESET] to recover the reserved RAM.

TECHNICAL NOTES

Custom Print uses the printer's dot addressable graphics capabilities to LIST your files. The Machine Language program in PROG\$ reads the currently installed c-set bit maps and translates them into a format that your printer can understand. Other printers may be used with this program if the escape-control print codes are modified according to your printer's needs.

Because Atari's characters are an 8x8 dot matrix, this program will not work on graphics printers with only a 5x7 dot matrix. If you make modifications to listing 1 and your printouts have upside-down characters, then replace line 100 of the program with the line 100 for the NEC revision in listing 2. (NOTE: *Antic* urges all readers making modifications for printers not listed above to send those modifications to us so that we can pass them on to our readers —ANTIC ED).

There is a limitation with the Atari printer handler that most people are not aware of. You absolutely cannot send an ATASCII 155 to your printer. The P: device always converts 155s (Atari's internal representation of carriage return) to ASCII 13.


To get around this problem, the machine language string PROG\$ looks for these 155s as it converts the bit maps for your printer. If it finds any, they are changed to ATASCII 151s.

This bit map is different, but close enough that the character is still quite readable. Using Atari's c-set, this problem occurs only with the upper case, inverse video letter "A". Compare closely the printout of normal and inverse video "A" in the Atari c-set example to see the difference. This is certainly better than having an unreadable character.

MYSTERY PAUSE

This program is completely compatible with XL machines and does not need the Translator disk, but you may wish to use it because of another undocumented XL Operating System bug. Occasionally, a printout will pause for 35–40 seconds for no apparent reason and will then pick up right where it left off again, without dropping a single character.

At first I thought it was a certain character combination (as Atari personnel explained it to me). After checking into the problem further, I found that the pauses are entirely random. It even happens occasionally when just listing a program with the printer's standard characters. The problem occurs more often with Custom Print, because it sends 8 bytes of data for every printed character. Be patient and your printout will always pick up right where it left off. The Translator will cure this timeout problem if you need that listing in a hurry.

Matthew J.W. Ratcliff is an electrical engineer in St. Louis, Missouri and a regular contributor to Antic. 

Listing on page 57

LABEL MAKER

continued from page 19

printer and RUN Listing 1. You will be asked to enter a border character. For now, press [X] and the screen will display an example of what the label will look like with X's as the border. You can then accept that border or choose another character.


If you press [ESC] at this point, you will be asked for a 3 digit number representing one of the graphics characters found on page 227 of the Gemini manual. (Epson owners can ignore the special characters). Type in your number and press [RETURN]. Since your computer has different character codes than the Gemini chart, what you next see on the screen will not be the same character as what is printed.

As you continue with the program, you are given opportunities to back up and re-do any of the steps. Eventually, you enter the name and address as it should appear on your labels. Reference numbers appear overhead to help in centering each line. At the end of each line, press [RETURN] to continue.


When finished with the entire address, you can change your border character or press [RETURN] to continue. Then you have the option of choosing any of the line numbers to re-edit, or choosing 0 if all is okay.

Next, you are given the choice of [1] returning to edit or [2] printing. After pressing [2], type in the number of labels you want, line up your printer and away you go! When your labels are all printed, simply cut them into four parts with scissors and stick them on your envelopes as needed.


If you want to print larger—one return address on each label—merge Listing 2 with listing 1 as follows: LOAD Listing 1 into memory then enter Listing 2 by typing ENTER "D:Filename" (Cassette, ENTER "C:"). Before running the altered program, turn your printer off to clear the memory buffer, then turn it on again to reset it.

William Watson lives in Reno, Nevada according to his return address label. 

Listing on page 60

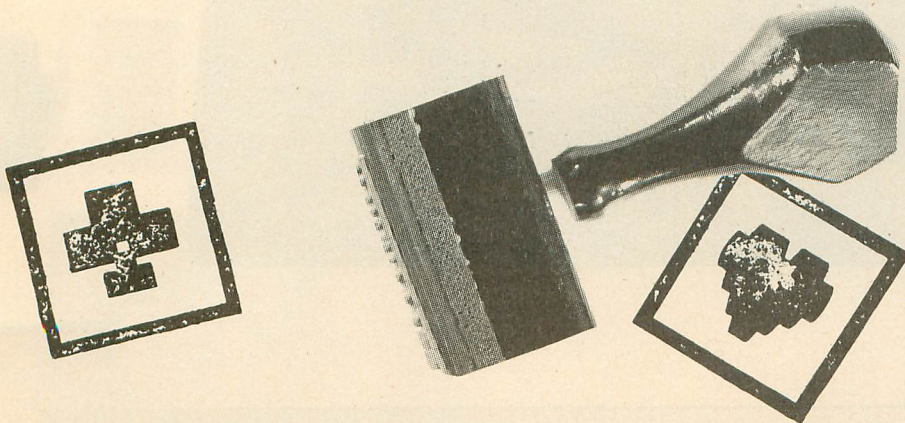

STAR'S NEW
PRINTERS WORK
20% FASTER.
COST 20% LESS. ARE
100% CERTAIN TO
CHANGE YOUR MIND
ABOUT PRINTERS.

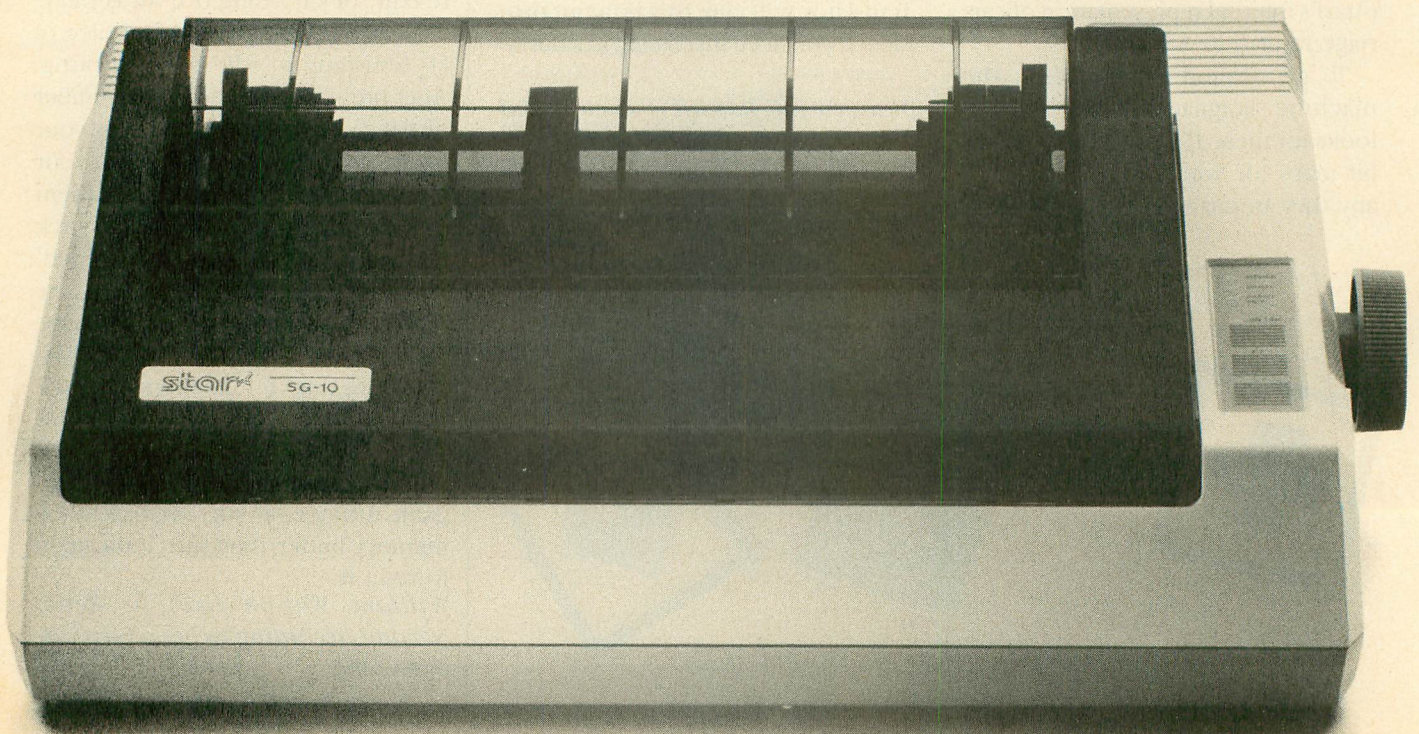

This new dual-mode SG-10 is only \$299.

N

o printer could be more appealing than one you design yourself.

And, in effect, that's what you've done.

The new "S" series printers from Star Micronics have been designed not to our specifications, but to yours. With values that confound our accountants but will make great sense to you.

These printers are faster than ever. More compatible and reliable. With more added in and fewer add-ons.

And yet they cost *less*.

Don't try to figure it out. Just enjoy.

NLQ IS 1 OF 2

Because we've increased our printing throughput by 20%, you can now finish 6 pages in the time it used to take to print 5. And even though we've upped our speed, we've kept up our quality.


In fact, on three of our new models, both draft and near-letter-quality are standard (no extra charge). A fourth model, the SB-10, prints draft and letter-quality standard (again, not extra).

So now, with just *one* printer, you're ready for data processing and word processing. That's like owning two printers for the price of just one.

GET ON LINE BY JUST PLUGGING IN

The new Star "S" series printers are fully compatible with even the most fickle of personal computers.

And they're especially friendly with IBM®-PC, Apple®, Commodore®, and all compatibles.

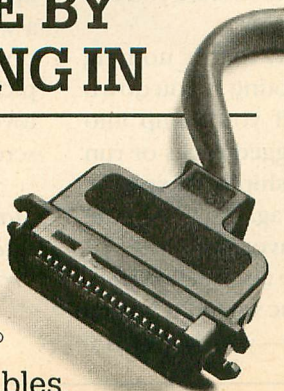

In most cases, hooking up is no more complicated than putting a square peg in a square hole. But it's a lot more rewarding.

READY FOR ANY SOFTWARE

The new "S" series printers make printing as easy as 1-2-3™

Which is just one example of the many spreadsheet programs they're ready for.



The new Stars can work with word processing programs like WordStar®. Educational software like Dr. Logo™. And even the new integrated formats like Framework™ and Symphony™.

So Star printers match hardware to software without disk-driving you crazy.

They handle many functions faster. They're more compatible. Less expensive. More reliable. And have a full year warranty. "S" series printers have been designed with so many of your needs in mind, it's as if you'd done it yourself.

And what a great job you did.

For a free demonstration, visit your local Star dealer.

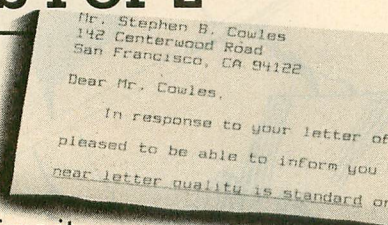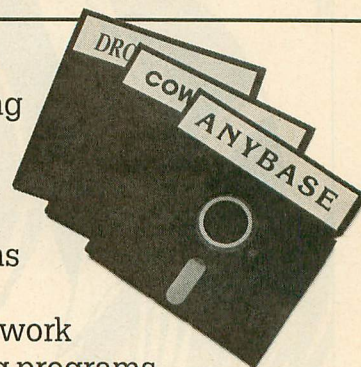

SR-10 prints 200 cps for only \$649.

SD-10 types draft and NLQ, just \$449.

SR-15 includes 16K memory for spreadsheets, \$799.


star

THE POWER BEHIND THE PRINTED WORD®

200 Park Avenue, New York, NY 10166
Chicago, IL (312) 773-3717 • Boston, MA (617) 329-8560
Irvine, CA (714) 586-8850

Prices shown are manufacturer's suggested retail prices.

game of the month

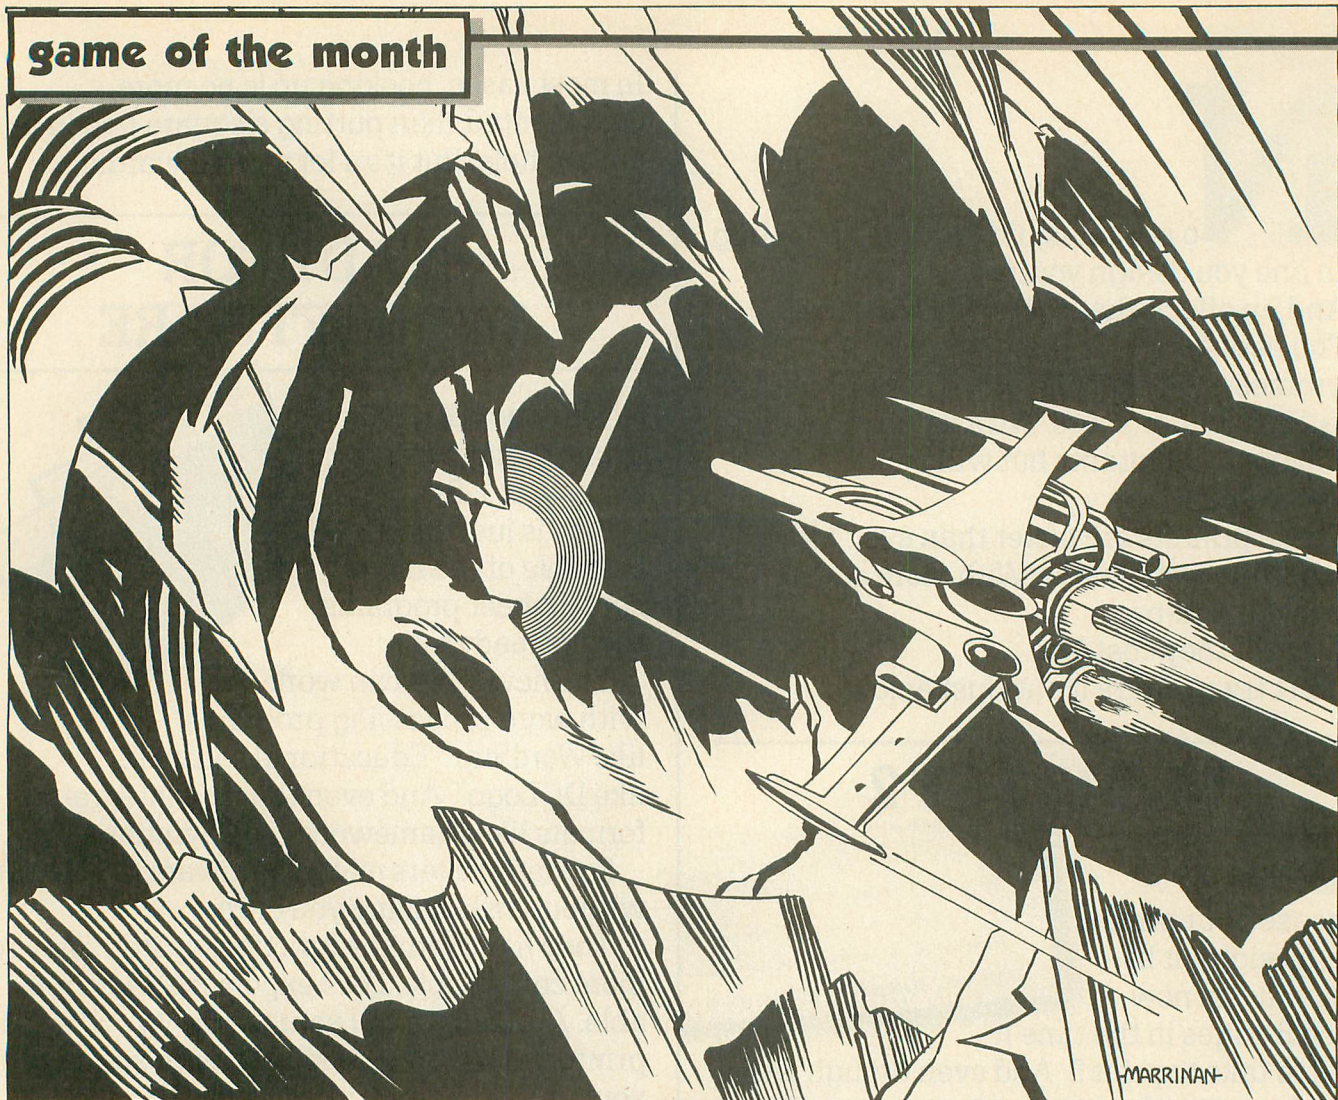

THIEF

by MAX LANGERT

A scrolling graphics maze adventure. Pilot a spaceship through dangerous caverns to recover stolen treasure. The BASIC program runs on all Atari computers.

You are a daring space pilot who has flown your explorer craft into the deadly caves where stolen treasures from your planet were hidden many centuries ago.

Type in the listing, check it with TYPO II, and SAVE it to disk or cassette before you RUN it.

EXPLORING THE CAVES

Your fuel tank can only hold 1,000

energy units. Therefore, along with recovering treasures, you also want to pick up energy cubes for a 500-unit recharge. Picking things up is accomplished simply by touching them. You must pick up a treasure before you can get to the next screen.

Just for a change, there's nothing chasing you or shooting at you down here. However... if you bump into one of the large, jagged rocks or run out of energy your ship will explode.

And if you brush against any of the surfaces of the cave, you lose 50 energy units. You're also sucked back to the left side of the screen which is a problem because—you can ONLY

exit the screen from the right.

GRAVITY AND SCORING

The gravity becomes heavier after every five screens. However, picking up a treasure turns off the gravity for a while—as well as giving you 1,000 points. You also get score points for picking up energy cubes, having leftover energy when you finish a screen, and simply staying alive...


Max Langert, 13, lives in Oakland and may well be the youngest game programmer Antic ever published.



Listing on page 63

Flight Simulator II

For
Atari computers
with 48K memory

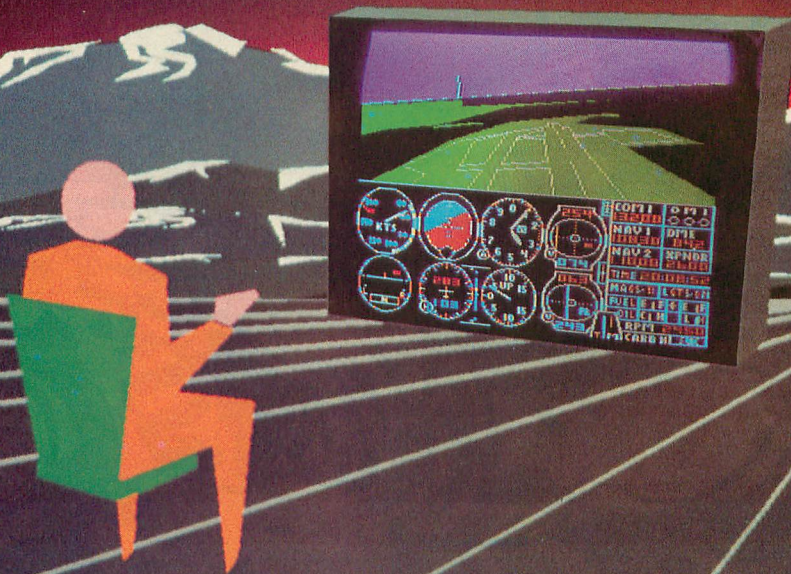

Put yourself in the pilot's seat of a Piper 181 Cherokee Archer for an awe-inspiring flight over realistic scenery from New York to Los Angeles. High speed color-filled 3D graphics will give you a beautiful panoramic view as you practice takeoffs, landings, and aerobatics. Complete documentation will get you airborne quickly even if you've never flown before. When you think you're ready, you can play the World War I Ace aerial battle game. Flight Simulator II features include ■ animated color 3D graphics ■ day, dusk, and night flying modes ■ over 80 airports in four scenery areas: New York, Chicago, Los Angeles, Seattle, with additional scenery areas available ■ user-variable weather, from clear blue skies to grey cloudy conditions ■ complete flight instrumentation ■ VOR, ILS, ADF, and DME radio equipped ■ navigation facilities and course plotting ■ World War I Ace aerial battle game ■ complete information manual and flight handbook.


See your dealer . . .

or write or call for more information. For direct orders please add \$1.50 for shipping and specify UPS or first class mail delivery. American Express, Diner's Club, MasterCard, and Visa accepted.

Order Line: 800/637-4983

subLOGIC
Corporation
713 Edgebrook Drive
Champaign IL 61820
(217) 359-8482 Telex: 206995

bonus game

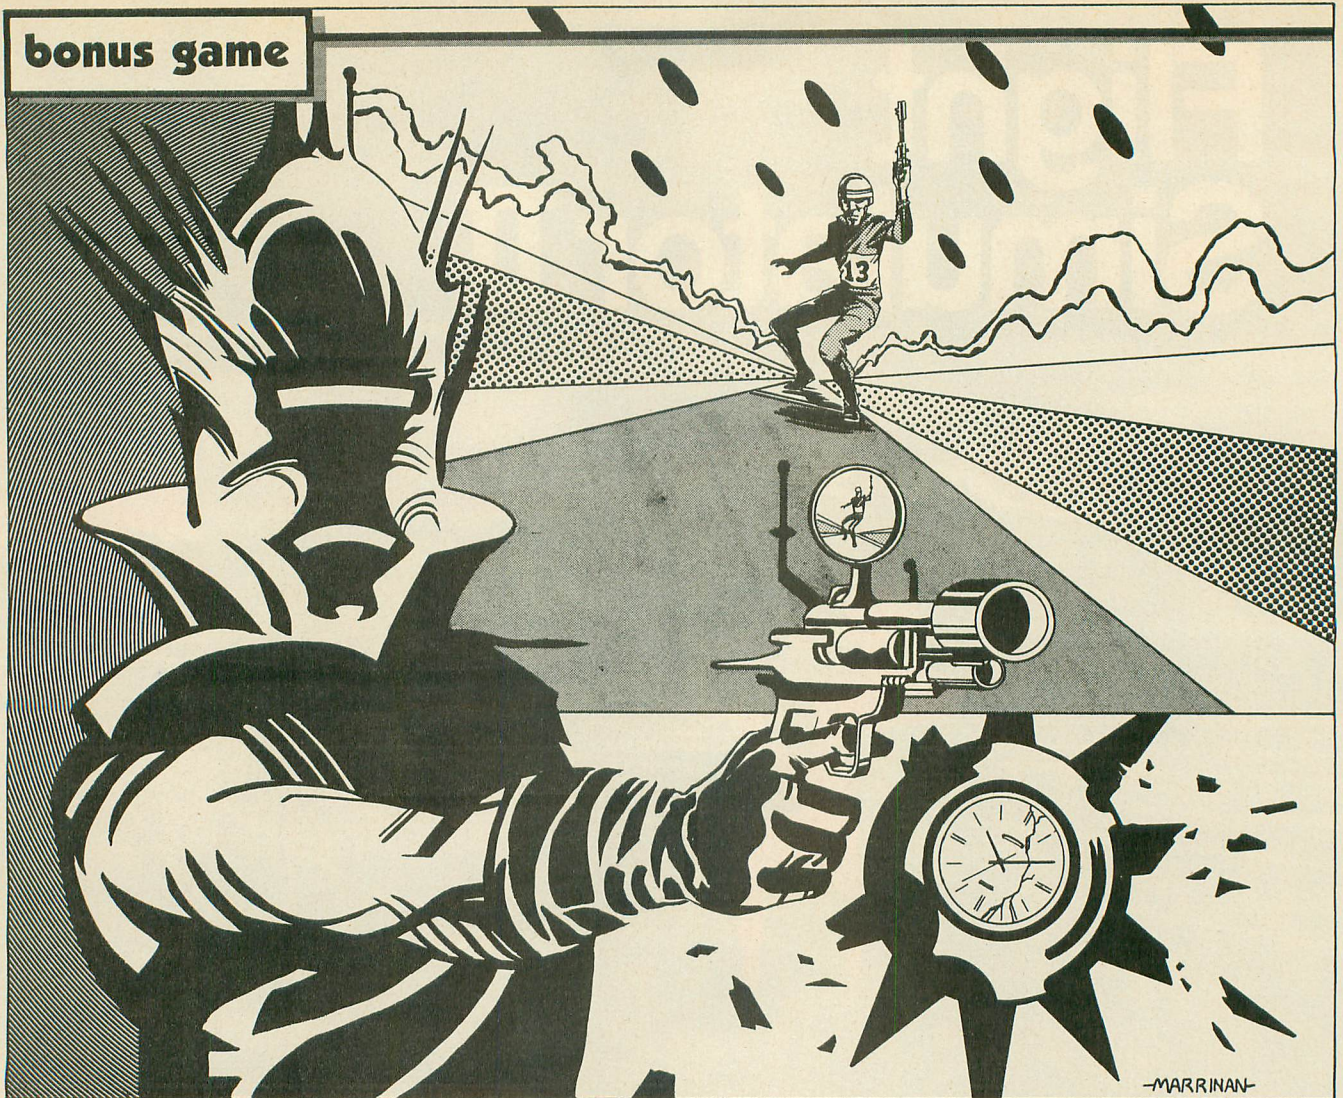

ZURK

by MICHAEL KRUEGER
and JOHN SETTLES

Enter the Laserfighting event of the Zurkian Olympics! Only the winner of the first-place Aluminum Medal of Zurk survives. This fast-moving joystick BASIC game runs on any Atari computer.

Your space garbage scow crash-landed on the planet Zurk and you have been forced to sign up for the Zurkian Olympics. You are entered in the 18-round Laserfighting event . . . and there is no second place!

The arena is a rectangle surrounded by fatal laser barriers, with equally

fatal laser obstacles scattered inside. For the first six rounds, you are shooting it out with a Zurkian Laserfighter dressed in black.

In the second six-round level, you must not only shoot the Zurk—you also have to grab the Zurkian Olympic Star before the timer runs out. The referees penalize failure with vaporization.

For the final six rounds, after you pick up the star it explodes into small Zurkian Olympic Pests which you must pick up before time runs out. After completing all three levels, the


doors of the arena open and you emerge victorious.

Luckily you get four tries at the Aluminum Medal of Zurk. You also receive an extra try for every 2,000 points you earn.

HOW TO BEGIN

Type in the program, check it with TYPO II, and SAVE it to disk or cassette before you RUN it.

Michael Krueger and John Settles live in Vermillion, South Dakota when they are not visiting the planet Zurk.

Listing on page 65 



Vastly SUPERIOR to any translation programs available! FOR ATARI
1200XL/600XL/800XL with 64K.
(Please specify computer model number!)

\$69.95 (Rom)
\$49.95 (D or C)

THE XL "FIX"!

The Atari XL series computers represent power, sophistication, and flexibility virtually unrivalled in today's Home Computer Market.

With "approximately" 30-40% of existing software being "incompatible", a real, and serious problem exists. Because of this we have developed THE XL "FIX"!

ADVANTAGES over cheaper "translation products":

1. The XL "FIX"! is capable of fixing more software... an estimated **30% more software!**
2. The XL "FIX"! is available in **DISK, CASSETTE, and now ROM!**
3. XL "FIX"! versions fix ALL THREE types of software (Disk - Cassette - and Cartridges!)
4. The XL "FIX"! (disk or cassette) adds **OVER 4K** of usable RAM to your computer (anyone using Data bases or Word processors will **really** appreciate this feature!)
5. You never have to hold the **OPTION** button down on 600XL or 800XL computers!
6. **VERY IMPORTANT!** You need to load the XL "FIX"! only **once**... you can **change** disks, cassettes, or cartridges **without** rebooting the XL "FIX"! each time (disk or cassette)!
7. The **ROM** version is instantaneous upon computer power up, has a high speed cursor, is instantly switchable to your original operating system, will work with 16K 600XL's, and more!

The XL "FIX"!... another SUPERIOR product! **64K required!**

DISTRIBUTOR/DEALER inquires welcome

Mastercard-Visa-Money
Order or Cashier Check.
Phone **(716) 467-9326**
Please specify computer model number!

Send \$49.95 (\$69.95 for Rom)
plus \$4 shipping and handling
(N.Y.S. residents please add 7%) to:
COMPUTER SOFTWARE SERVICES
P.O. Box 17660
Rochester, New York 14617



\$69.95 (Rom)
\$49.95 (D or C)



THREE NEW PRODUCTS!

THE "SUPER PILL"!

Exactly the same as the WORLD'S leading cartridge backup device... **THE PILL!**... except it's even simpler to operate, it's **SWITCHLESS!** Excellent for families having young children. Totally eliminates opening computer doors and switches. **THE "SUPER PILL"!** is the most advanced state of the **CARTRIDGE BACKUP** device available today. It is totally compatible with all ATARI computers and all programs backed up by the original "PILL"! Only \$79.95 plus \$4 shipping and handling.

THE "PROTECTOR/SILENCER"!

The **"PROTECTOR"!** is a disk and hardware modification (no soldering) for Atari 810, 1050, and Indus GT disk drives that will allow you to write true **BAD SECTORS** wherever you wish (not to be confused with ridiculous speed control or tape jerking schemes!). **Powerful** disk program finds hidden directories, scrambles existing directories, fast maps, hex conversions, disk dupes, and much more!

The **"SILENCER"!** quiets your drive tremendously (eliminates the **LOUD** grinding noise when you read a bad sector!), **PLUS** it allows you to **WRITE TO BOTH SIDES** of any disk **WITHOUT** cutting or notching the disk! Both for only \$49.95 plus \$4 shipping and handling.

THE "COMPANION"!

An amazing device that will enhance the capabilities of the **XL "FIX"!** or Atari Translator. It will allow you to **de-select BASIC** (no more need to hold the **OPTION** button while loading programs on the 600XL's and 800XL's), and it will allow you to **de-select the DIAGNOSTICS** (no more bad loads because of the **DIAGNOSTICS** jumping into the middle of your program load routine!). Installation is simple (10 minutes) and requires **NO** soldering! Only \$29.95 plus \$4 shipping and handling.

DISTRIBUTOR/DEALER inquiries welcome.

Our other fine products include THE "PILL", XL "FIX", "IMPOSSIBLE", "METAMORPHOSES", and "REMOTE"!

Mastercard-Visa-Money
Order or Cashiers Check.
Phone orders:
(716) 467-9326.

Atari is a TM of Atari Inc. The "METAMORPHOSES" is a TM of Computer Software Services (division of S.C.S.D., Inc.)

COMPUTER SOFTWARE SERVICES

P.O. Box 17660
Rochester, New York 14617



\$149.95

For years they said it couldn't be done... **THE "IMPOSSIBLE"!** they claimed!

Backup almost any disk currently available (even **heavily protected** programs) with an **UNMODIFIED** disk drive!
Works with **ANY** disk drive!

PURPOSE: The **"IMPOSSIBLE"!** was developed in response to the estimated half million disk drive users that own a drive other than the Atari 810 (Indus, Percom, Trak, Rana, Astra, etc.) that wish to **BACK UP** their **protected software**. Due to a radically new technology developed by Computer Software Services, modification to your disk drive has been eliminated! The advantages are obvious! Drive warranties are not violated, the chance accidental damage has been eliminated, etc., etc.

OPERATION: The **"IMPOSSIBLE"!** consists of a disk program (**unprotected** so you can make as many backups as you wish) and a 4K STATIC RAM pack which is inserted into your computer (no soldering!) The **"IMPOSSIBLE"!** will read your program disk and then **re-write it in an unprotected format!** You may make additional backup copies using a sector copier or even regular DOS! Because your backup copy no longer has **BAD SECTORS** or **EXOTIC FORMATS**, the program data can now be manipulated into DOS compatible files (even double density!), transferred to cassette, etc. (with the aid of our Satellite programs!) No user programming knowledge required. A few programs require logical thinking.

- FEATURES:**
1. Backup protected disks
 2. Handles most MULTI-LOAD programs
 3. Makes DOS files (with Satellite option)
 4. Up to 90K data input capable
 5. AFSD-Automatic FUZZY Sector Discriminator
 6. Expands computer memory to 52K usable
 7. Simple NO SOLDER installation
 8. Satellite expandable

PROJECTED SATELLITES: A **"COMPACTOR"!** program which will convert your program into DOS compatible files (double density compatible!) for the storage of several programs on one disk. A **"COLUMN 80"!** program for Word Processing, etc. It allows 80 columns on the screen! The **"XL-MATE"!** will allow programs made with your 400/800 **"IMPOSSIBLE"!** to now play on your XL Computer! The **METAMORPHOSES II** program will allow you to convert your **protected CASSETTES** into disk DOS files and vice-versa. All satellite programs must be used with conjunction with The **"IMPOSSIBLE"!**

REQUIREMENTS: The **"IMPOSSIBLE"!** diskette, the 4K STATIC RAM pack, a 400 or 800 computer (please specify!) with 48K and "B" Rom's. **NOTE!** The very old ATARI computers were shipped with "A" Rom's which had some serious "Bugs". Even if you don't own an **"IMPOSSIBLE"!** you should upgrade to "B" Rom's (simple to install!) We have them available at a very inexpensive price. **CALL US!** "XL" version available soon!

NOT A PIRATING TOOL: We at C.S.S. did not design The **"IMPOSSIBLE"!** to put Software Manufactures out-of-business overnight! Nearly all of our products have been "ripped-off" by industry parasite who have little or no ability to develop a product of their own so we can sympathize with their dilemma. All C.S.S. products have built-in safe guards which prohibit their use for flagrant pirating. The **"IMPOSSIBLE"!** is no exception! While The **"IMPOSSIBLE"!** backup the most heavily protected programs, it also checks to see that the 4K STATIC RAM pack is installed before allowing the backup copy to execute!

EXAMPLES: The **"IMPOSSIBLE"!** has been tested on 300 of the most popular and heavily protected programs we could find. With nearly 4000 programs for Atari, we DO NOT guarantee that it will backup all programs in the past-present-and future! We will supply updates at \$6 each (non-profit!) if and when necessary. Programs we have successfully backed up include: Blue Max, Visi-cal, Archon, Mule, File Manager 800 +, Syn Calc, Syn File, One on One, 7 Clites of Gold, Super Bunny, Load Runner, Drol, and Gumball just to name a few!


Mastercard-Visa-Money
Orders or Cashier Check.
Phone: **(716) 467-9326**
Please specify computer model number!

Send \$149.95 plus
\$4 shipping and handling
(N.Y.S. residents please add 7%)

COMPUTER SOFTWARE SERVICES
P.O. BOX 17660
ROCHESTER, N.Y. 14617



\$149.95

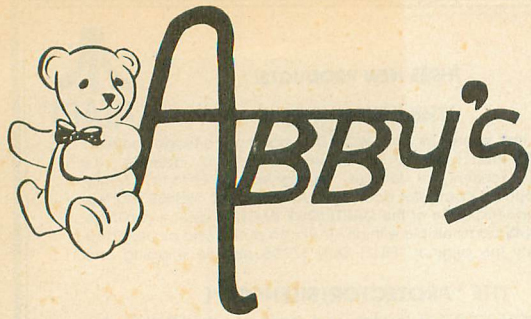


ABBY'S CARRIES A FULL SELECTION
OF SOFTWARE FOR YOUR ATARI.
CALL FOR CURRENT PRICES.
ASK FOR FREE CATALOG.



KOALA PAD W/SOFTWARE\$59

CALL FOR PRICES ON ...

COLORING SERIES I
KOALAGRAMS SPELLING
INSTANT PROGRAMMER'S
GUIDE
LOGO DESIGN MASTER
SPIDER EATER
PAINT-A-RHYME
THE GRAPHICS
EXHIBITOR



Trains (D)\$29
Fraction Fever (R)\$26
Up For Grabs (R)\$29
Snooper Troops
I, II (D)ea. \$29
Facemaker (R)\$26
Jukebox (R)\$29
In Search of The Most Amazing Thing (D)\$29
Aerobics (D)\$33



ALL OTHER TITLES AVAILABLE. CALL FOR PRICE.
ASK ABOUT SPINAKER'S TRILLIUM, FISHER-PRICE,
AND WYNDHAM CLASSICS TITLES.



Hitchhiker's Guide to the Galaxy (D)CALL
Zork I, II, III (D)ea. \$29
Cutthroats (D)\$35
Sea Stalker (D)\$35
Star Cross (D)\$35

We Stock A Complete Line Of
Software From Other Fine Makers

Raid Over Moscow (D)\$27 Bruce Lee (C & D)\$25
Scrolls of Abaddon (D)\$27 Zaxxon (D) (C)\$29
Beachhead (D)\$27 Dallas Quest (C & D)\$25
Demon Attack (Imagic) (R)\$2.50

DISCOUNT SOFTWARE

ELECTRONIC ARTS

Archon (D)\$29 Pinball Construction Set-(D)\$29
Archon II: Adept (D)CALL The Realm of Impossibility (D)\$29
One On One (D)\$29 Seven Cities of Gold (D)\$29

WE CARRY ALL **EPYX** TITLES. CALL FOR PRICES.

MICROPROSE

F-15 Strike Eagle (D) (C)\$27
Hellcat Ace (D) (C)\$24
Mig Alley Ace (D) (C)\$27
NATO Commander (D) (C)\$27
Solo Flight (D) (C)\$27

SSI

Battle Normandy (D)\$28
Broadside (D)\$28
Carrier Force (D)\$43
Combat Leader (D) (C)\$28
Questron (D)\$47
War in Russia (D)\$54

SUBLOGIC

Flight Simulator II (D)\$39

OSS

Basic XL (R)\$70

RESTON

Movie Maker (R)\$39

CBS

Murder By The Dozen (R)\$27

SYNAPSE

Syncalc (D)\$45

Syntrend (D)\$45

Synfile (D)\$45

Syncom (D)\$45

SAVE ON **ATARI** TITLES

MicroSoft Basic II
(D & R)\$45
Atariwriter (R)\$35
Assembler Editor (R)\$25
Macro Assembler (D)\$25
Home Filing Manager (D)\$25
Visicalc (D)\$55
Pilot (R)\$69
Logo (R)\$65

Atari Educator Kit\$29.95

Includes: 410 Recorder, Basic

Cartridge, States and Capitals Program

Programmer's Kit\$19.95

Includes: Basic Cartridge,

Inside Atari Basic Book,

Basic Language Reference Manual

Arcade Champ Kit\$24.95

Includes: Pac Man, Qix,

Two Joysticks, Cartridge Holder

Entertainer Kit\$24.95

Includes: Pac Man, Space Invaders,

Two Joysticks

Pitfall (R)\$12.95

Typo Attack (D)\$ 7.50

CALL FOR PRICE ON OTHER ATARI TITLES.

ATARI HARDWARE

Atari 800 XL and
Atari 1050 Disk Drive\$319
Light Pen\$ 45
Atari 1020 Color Printer/Plotter\$ 69
Atari 1025 Dot Matrix Printer\$200
Atari 1027 Letter Quality Printer\$259
Atari 1030 Modem\$ 55

Delta 15 (160 CPS)\$455

Radix 10 (200 CPS)\$515

Radix 15 (200 CPS)\$599

Epson RX 80\$229

NEC 8027CALL

Okimate 10CALL

MPP 1150 Interface\$ 79

Print Wheelsea \$ 5

WE ALSO CARRY UDS, SIGNALMAN

PRINTERS

Gemini 10X (120 CPS)\$255
Gemini 15X (120 CPS)\$369
Delta 10 (160 CPS)\$339

ACCESSORIES

MPP 1000C Modem\$120

MPP MicroRam (64K Expansion

for 600 XL)\$110


Wico JoysticksFrom \$ 17

Pointmaster Joystick\$ 8

TURN YOUR ATARI INTO A FERRARI

THE INCREDIBLE **INDUS** GT DISK DRIVE INCLUDES:

- SDD
- WORD PROCESSOR
- DATA BASE
- SPREAD SHEET



ALL FOR AN INCREDIBLE \$299

AD # **AT**
35

(C) CASSETTE TAPE (D) DISK (R) ROM CARTRIDGE
CALL TOLL FREE

AD # **AT**
35

Order Line **1-800-282-0333** M-F 10 a.m.-7 p.m. Eastern Time Customer Service **1-513-879-9699**
610 Middle Street, Fairborn, OH. 45324



Prepaid orders over \$30 receive free shipping, UPS, continental US. No waiting period when paid by credit card, certified check or money order. Add \$2 shipping and handling on orders under \$30. Add \$5 for COD orders. Hardware requires additional freight charges. Ohio residents add 5.5% sales tax. All items subject to availability and price change.



PLEASE CITE AD NUMBER WHEN ORDERING.

SOFTWARE LIBRARY

Antic type-in listing section includes every full-length program from this issue. Listings are easier to type and proofread, easy to remove and save in a binder if you wish.

► **DESIGN YOUR OWN CHARACTER SETS**

FONT MAKER54

► **PRINT THE ATARI SPECIAL CHARACTERS**

CUSTOM PRINT57

► **THE SCREEN DUMP YOU'VE BEEN WAITING FOR**

KWIK DUMP59

► **PRINT YOUR OWN RETURN ADDRESS STICKERS**

LABEL MAKER60

► **ASSEMBLY LANGUAGE**

KEYBOARD COMMANDER61

► **GAME OF THE MONTH**

THIEF63

► **BONUS GAME**

ZURK65

TYPING SPECIAL ATARI CHARACTERS52

HOW TO USE TYPO II53 ERROR FILE53

DISK SUBSCRIBERS: You can use all these programs immediately. Just follow the instructions in the accompanying magazine articles.



No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the publisher.

Antic program listings are typeset by Star's Gemini 10X Printer—From Star Micronics, Inc., 200 Park Avenue, New York, NY 10166.

TYPING SPECIAL ATARI CHARACTERS




































Shown below are the Atari Special Characters as printed in **Antic** listings—and the keys you must type in order to get them. Boxes are drawn around the normal video characters here so you can see their positions more accurately, these boxes do not appear in the printed listings.



































Whenever the CTRL key (CONTROL on XL models) or SHIFT key is used, *hold it down* while you press the next keys. Whenever the ESC key is used, *press and release* it before typing the next keys.

Turn on inverse video by pressing the Atari logo key  once. Turn it off by pressing a second time. (XL models use the Reverse Video Mode Key  instead.)

Sometimes it's not easy to tell apart the following characters, shown here in both normal and inverse video. Be especially careful when you type any of these:

  CTRL F	  /
  CTRL G	  SHIFT +
  CTRL N	  SHIFT -
  CTRL R	  -
  CTRL S	  +

NORMAL VIDEO			
FOR THIS	TYPE THIS	FOR THIS	TYPE THIS
	CTRL ,		CTRL T
	CTRL A		CTRL U
	CTRL B		CTRL V
	CTRL C		CTRL W
	CTRL D		CTRL X
	CTRL E		CTRL Y
	CTRL F		CTRL Z
	CTRL G		ESC ESC
	CTRL H		ESC CTRL -
	CTRL I		ESC CTRL =
	CTRL J		ESC CTRL +
	CTRL K		ESC CTRL *
	CTRL L		CTRL .
	CTRL M		CTRL ;
	CTRL N		SHIFT =
	CTRL O		ESC
	CTRL P		SHIFT
	CTRL Q		CLEAR
	CTRL R		ESC DELETE
	CTRL S		ESC TAB

INVERSE VIDEO			
FOR THIS	TYPE THIS	FOR THIS	TYPE THIS
	⌘ CTRL ,		⌘ CTRL Y
	⌘ CTRL A		⌘ CTRL Z
	⌘ CTRL B		ESC
	⌘ CTRL C		SHIFT
	⌘ CTRL D		DELETE
	⌘ CTRL E		ESC
	⌘ CTRL F		SHIFT
	⌘ CTRL G		INSERT
	⌘ CTRL H		ESC
	⌘ CTRL I		CTRL
	⌘ CTRL J		TAB
	⌘ CTRL K		ESC
	⌘ CTRL L		SHIFT
	⌘ CTRL M		TAB
	⌘ CTRL N		⌘ CTRL .
	⌘ CTRL O		⌘ CTRL ;
	⌘ CTRL P		⌘ SHIFT
	⌘ CTRL Q		ESC CTRL 2
	⌘ CTRL R		ESC
	⌘ CTRL S		CTRL
	⌘ CTRL T		DELETE
	⌘ CTRL U		ESC
	⌘ CTRL V		CTRL
	⌘ CTRL W		INSERT
	⌘ CTRL X		

HOW TO USE TYPO II

Type in TYPO II and SAVE a copy to disk or cassette.

Type GOTO 32000 and follow TYPO II onscreen instructions. If the resulting two-letter line codes are not exactly the same as those in the magazine, you mistyped something in that line.

To call back any line previously typed, type an asterisk [*] followed (without in-between spaces) by the line number, then press [RETURN]. This is also the way you use TYPO II to proofread itself.

To LIST your program, press [BREAK] and type LIST. To return to TYPO II, type GOTO 32000.

To remove TYPO II from your program, type LIST "D:FILENAME",0,31999 (Cassette owners LIST "C:"). Type NEW, then ENTER "D:FILENAME" (Cassette—ENTER "C:"). Your program is now in memory without TYPO II and you can SAVE or LIST it to disk or cassette.

BASIC XL cartridge owners type SET 5,0 and SET 12,0 before using TYPO II.

```
WB 32000 REM TYPO II BY ANDY BARTON
VM 32010 REM VER. 1.0 FOR ANTIC MAGAZINE
HS 32020 CLR :DIM LINES(120):CLOSE #2:CLOS
SE #3
BN 32030 OPEN #2,4,0,"E":OPEN #3,5,0,"E"
YC 32040 ? "K":POSITION 11,1:? "11120###"
EM 32050 TRAP 32040:POSITION 2,3:? "Type
in a program line"
HS 32060 POSITION 1,4:? " ":INPUT #2:LINE
S:IF LINES="" THEN POSITION 2,4:LIST B
:GOTO 32060
XH 32070 IF LINES(1,1)="*" THEN B=VAL(LIN
ES(2,LEN(LINES))):POSITION 2,4:LIST B:
GOTO 32060
TH 32080 POSITION 2,10:? "CONT"
MF 32090 B=VAL(LINES):POSITION 1,3:? " ";
NY 32100 POKE 842,13:STOP
CN 32110 POKE 842,12
```

```
ET 32120 ? "K":POSITION 11,1:? "11120###"
":POSITION 2,15:LIST B
CE 32130 C=0:ANS=C
QR 32140 POSITION 2,16:INPUT #3:LINE$:IF
LINE$="" THEN ? "LINE ";B;" DELETED":G
OTO 32050
VV 32150 FOR D=1 TO LEN(LINES):C=C+1:ANS=
ANS+(C*ASC(LINES(D,D))):NEXT D
WJ 32160 CODE=INT(ANS/676)
JW 32170 CODE=ANS-(CODE*676)
EH 32180 HCODE=INT(CODE/26)
BH 32190 LCODE=CODE-(HCODE*26)+65
HB 32200 HCODE=HCODE+65
IE 32210 POSITION 0,16:? CHR$(HCODE):CHR$
(LCODE)
VG 32220 POSITION 2,13:? "If CODE does no
t match Press ### and edit line a
bove.":GOTO 32050
```

ERROR FILE

ADVENT X-5

NOV '84

If you're having trouble saving this to cassette, change line 4005 to read: IF PEEK(195)=130 THEN TRAP 4010:IS="C":GOTO L

ADVENT X-5

NOVEMBER '84

Add the following line: 8020 RUN. If the program locks up, you may be mistyping line 1005, for which the TYPO II code is EJ.

ADVENTURE ISLAND

NOV '84

Line 837 should read: 837

DATA CYBERNETIC TANK,
999, 0, 6, 50, 4

ADVENTURE ISLAND MEMORY

If you're getting an Error 2 (Insufficient memory) while running "Adventure Island" from our November, 1984 issue, it may be because you're using DOS-XL instead of Atari DOS 2.0S. "Adventure Island" is a big program and needs every bit of memory it can get. DOS-XL is a residnet DOS and does not leave enough memory for this particular program.

MISSING INFOBITS

DECEMBER '84

The AL source listing for Infobits (Dec. '84) was left out of the previous issue. You'll find it in the Jan. '85 Software Library.

LITTLE BROTHER INSTALLED PROPERLY

April '84

The schematic on page 106 shows resistor R11 to have a value of 2.2 Ohms. This should be 2.2 kilo Ohms.

ANTIC 4/5 EDITOR

October '84

To get this to run on XL machines, change both 36's in the lines 52 to 35, and change the 39 in line 522 to 38.

OCTOBER OMISSIONS October '84

A number of division signs [/] were omitted at the printer. On the magazine pages there is an empty space where they should have appeared. For specific corrections, see the December '84 or January '85 error file.

FONT MAKER

Article on page 16.

LISTING 1

```

XW 10 REM GEMINI 10X FONT MAKER
NE 15 REM BY JAMES DUFFIN
RG 20 REM ANTIC MAGAZINE
VS 30 GOSUB 2690:REM EXPLANATION
HF 40 GOSUB 2190:REM MEMORY MAP
CJ 50 GOSUB 2290:REM IOCB'S AND DIM'S
CE 60 GOSUB 2340:REM SCREEN SETUP
SE 70 POKE 731,90:GOTO 640
VF 80 REM MAIN LOOP
KX 90 REM (1) MOVE CURSOR
PQ 100 S=STICK(0):IF S=15 THEN GOTO 240
XL 110 PX=X:PY=Y:PZ=Z
QY 120 X=X+(S=5 OR S=6 OR S=7)-(S=9 OR S=
10 OR S=11):Y=Y+(S=5 OR S=9 OR S=13)-(
S=6 OR S=10 OR S=14)
YF 130 IF X>11 THEN X=3
SB 140 IF X<3 THEN X=11
LW 150 IF Y>9 THEN Y=3
NI 160 IF Y<3 THEN Y=9
JY 170 LOCATE X,Y,Z
EP 180 IF PZ=43 THEN POSITION PX,PY:? "+"
VS 190 IF PZ=20 THEN POSITION PX,PY:? "o"
NG 200 IF Z=20 THEN POSITION X,Y:? CHR$(
48)
JC 210 IF Z=43 THEN POSITION X,Y:? CHR$(
71)
VK 220 SPV=60:SDV=4:SVV=4:STV=2:GOSUB 265
0
SB 230 GOTO 80
RN 240 REM (2) TRIGGER INPUT
AQ 250 IF STRIG(0)=1 THEN GOTO 300
SE 255 GOSUB 3000
LB 260 IF Z=20 THEN Z=43:POSITION X,Y:? C
HR$(Z):GOTO 280
GZ 270 IF Z=43 THEN Z=20:POSITION X,Y:? C
HR$(Z)
HI 280 SPV=6:SDV=6:SVV=10:STV=1:GOSUB 265
0:GOSUB 3000:GOSUB 3000
SN 290 GOTO 80
FR 300 REM (3) KEYBOARD INPUT
XP 310 IN=PEEK(764):POKE 764,255:IF IN=25
5 THEN 360
GH 320 IF IN=58 THEN D=1*(D=0):GOSUB 3000
:GOSUB 1490
UL 330 IF IN=42 THEN SPV=60:SDV=10:STV=2:
GOSUB 2650:GOSUB 1360:GOTO 640:REM "E"
=EDIT
ZH 340 IF IN=62 THEN GOSUB 1360:GOSUB 960
:GOTO 640:REM "S"=SAVE
WF 350 IF IN=0 THEN GOSUB 1360:GOSUB 1120
:GOTO 640:REM "L"=LOAD
II 360 REM START PRESSED
NY 370 IF PEEK(53279)=6 THEN GOSUB 1360:G
OSUB 1560:GOTO 660:REM "START"=LOAD PR
INTER
LY 380 GOTO 100
JO 390 REM READ CHAR. TO GRID
KL 400 X=3:D=PEEK(CHORG+10*(C-32))
CT 410 Y=9:RESTORE 480:IF X>11 THEN SOUND
0,0,0,0:RETURN
PW 420 T(X-2)=PEEK(CHORG+10*(C-32)+X-2)
BS 430 IF Y<3 THEN X=X+1:GOTO 410
TC 440 READ SUM
CY 450 IF T(X-2)>=SUM THEN T(X-2)=T(X-2)-
SUM:POSITION X,Y:? "o"
NJ 460 IF T(X-2)<=0 THEN X=X+1:GOTO 410
DB 470 Y=Y-1:GOTO 430
XI 480 DATA 64,32,16,8,4,2,1
GT 490 REM PLOT CHAR POINTS
DB 500 POKE 88,SCL:POKE 89,SCH:POKE 87,8:
FOR X=3 TO 11:FOR Y=3 TO 12:COLOR 0:PL
OT 0X+X,0Y+Y:NEXT Y:NEXT X:X=3
IH 510 Y=9:RESTORE 580:IF X>11 THEN POKE
88,TEXTL:POKE 89,TEXTH:POKE 87,0:COLOR
32:PLOT 1,1:RETURN
PX 520 T(X-2)=PEEK(CHORG+10*(C-32)+X-2)
CV 530 IF Y<3 THEN X=X+1:GOTO 510
TD 540 READ SUM
VV 550 IF T(X-2)>=SUM THEN T(X-2)=T(X-2)-
SUM:COLOR 1:PLOT 0X+X,0Y+Y+2*D
OS 560 IF T(X-2)<=0 THEN X=X+1:GOTO 510
DS 570 Y=Y-1:GOTO 530
XJ 580 DATA 64,32,16,8,4,2,1
BF 590 REM CHAR. LINE?
BC 600 IF C>=32 AND C<=62 THEN X=3+C-32:Y
=15:OX=10*(C-32):OY=-1:D=PEEK(CHORG+10
*(C-32))
LF 610 IF C>=63 AND C<=93 THEN X=3+C-63:Y
=16:OX=10*(C-63):OY=9:D=PEEK(CHORG+10*
(C-32))
LM 620 IF C>=94 AND C<=124 THEN X=3+C-94:
Y=17:OX=10*(C-94):OY=19:D=PEEK(CHORG+1
0*(C-32))
ZI 630 RETURN
GW 640 REM SELECT CHAR. TO EDIT
MJ 650 POSITION 16,5:? "":POSITION 16,7:
? " ":POSITION 16,9:? " ":POSITION 16,
11:? " "
TJ 660 X=3:Y=15:LOCATE X,Y,Z
LO 670 POSITION X,Y:? CHR$(Z+128*(Z<128))
:GOSUB 2680
SK 680 S=STICK(0):IF S=15 THEN GOTO 800
YG 690 PX=X:PY=Y:PZ=Z
RA 700 X=X+(S=5 OR S=6 OR S=7)-(S=9 OR S=
10 OR S=11):Y=Y+(S=5 OR S=9 OR S=13)-(
S=6 OR S=10 OR S=14)
ZK 710 IF X>33 THEN X=3
VD 720 IF X<3 THEN X=33
RG 730 IF Y>17 THEN Y=15
RK 740 IF Y<15 THEN Y=17
KA 750 LOCATE X,Y,Z
TS 760 POSITION PX,PY:? CHR$(PZ)
IA 770 SPV=60:SDV=10:SVV=6:STV=2:GOSUB 26
50
NF 780 POSITION X,Y:? CHR$(Z+128*(Z<128))
RM 790 GOTO 680
DZ 800 REM EXIT CHAR. SELECT
PJ 810 IF STRIG(0)=1 THEN GOTO 880
SC 815 GOSUB 3000
IT 820 SPV=81:SDV=10:SVV=6:STV=2:GOSUB 26
50
TP 830 C=Z-128*(Z>128):GOSUB 590:GOSUB 39
0:GOSUB 490
DL 840 X=3:Y=3:LOCATE X,Y,Z:POSITION X,Y:
SPV=47:SDV=10:SVV=6:STV=2:GOSUB 2650
OB 850 ? CHR$(Z+128*(Z<128))
MU 860 IF STRIG(0)=0 THEN GOTO 860
SP 870 GOTO 80
IR 880 REM START PRESSED
PP 890 IF PEEK(53279)=6 THEN GOSUB 1560:R
EM "START"=LOAD PRINTER
QQ 900 REM KEYBOARD INPUT
GQ 910 IN=PEEK(764):POKE 764,255:IF IN=25
5 THEN 950
CG 920 IF IN=62 THEN POSITION X,Y:? CHR$(
Z):GOSUB 960:GOTO 640:REM "S"=SAVE

```

```

ZP 930 IF IN=0 THEN POSITION X,Y:? CHR$(Z
):GOSUB 1120:GOTO 640:REM "L"=LOAD
BK 940 IF IN=58 THEN D=1*(D=0):GOSUB 1490
RG 950 GOTO 680
NG 960 REM SAVE FONT
TQ 970 POKE 712,218
SU 980 POSITION 16,5:? " ":POSITION 16,7:
? " ":POSITION 16,9:? "*" :POSITION 16,
11:? " ":POSITION 16,13:? " "
GO 990 FILES="" :INS="" :INPS="" Save File na
me " :GOSUB 1990
GD 1000 POSITION 18,13:? "START Load Prin
ter"
NW 1010 TRAP 2140
AD 1020 OPEN #1.8,0,FILES:GOSUB 3000:POKE
850,11
BB 1030 POSITION 4,19:? "Saving Font...Pl
ease Stand By. "
CU 1040 POKE 852,0:POKE 853,0RG:POKE 710,
8:POKE 712,8
MO 1050 POKE 856,0:POKE 857,4
GK 1060 E=USR(ADR(CIOS),16)
VI 1070 POKE 852,SCL:POKE 853,SCH
YW 1075 GOSUB 3000
NX 1080 POKE 856,0:POKE 857,5
GT 1090 E=USR(ADR(CIOS),16)
ZC 1095 GOSUB 3000
LY 1100 CLOSE #1:POKE 712,12:POKE 710,12:
TRAP 40000:POSITION 4,19:? "
"
JG 1110 GOSUB 2840:RETURN
XH 1120 REM LOAD FONT
BG 1130 POKE 712,218:NS=""
CK 1140 POSITION 16,5:? " ":POSITION 16,7
:? " ":POSITION 16,9:? " ":POSITION 16
,11:? "*" :POSITION 16,13:? " "
VP 1150 FILES="" :INS="" :INPS="" Load File na
me " :GOSUB 1990
GR 1160 POSITION 18,13:? "START Load Prin
ter"
OQ 1170 TRAP 2140
CC 1180 OPEN #1.4,0,FILES:GOSUB 3000:POKE
850,7
XK 1185 NS=FILES(3)
OJ 1190 POSITION 4,19:? "Loading Font...P
lease Stand By. "
CM 1200 POKE 852,0:POKE 853,0RG:POKE 710,
8:POKE 712,8
MG 1210 POKE 856,0:POKE 857,4
GC 1220 E=USR(ADR(CIOS),16)
VA 1230 POKE 852,SCL:POKE 853,SCH
NP 1240 POKE 856,0:POKE 857,5
GL 1250 E=USR(ADR(CIOS),16)
YU 1255 GOSUB 3000
VX 1260 REM SHOW EDITED CHAR'S
MN 1270 C=32
AW 1280 GOSUB 590:IF C>124 THEN 1340
DZ 1290 POSITION X,Y:? CHR$(C)
DH 1300 FOR I=1 TO 9:T(I)=PEEK(CHORG+10*(
C-32)+I)
QQ 1310 IF T(I)<0 THEN POSITION X,Y:? CH
RS(C+128):I=9
FB 1320 NEXT I
VH 1330 C=C+1:GOTO 1280
NM 1340 CLOSE #1:POKE 710,12:POKE 712,12:
TRAP 40000:POSITION 4,19:? "
"
JW 1350 GOSUB 2840:RETURN
TY 1360 REM CHAR. TO RAM
LU 1370 FOR I=1 TO 9:T(I)=0:NEXT I
AG 1380 X=3
XZ 1390 Y=3:IF X>11 THEN GOTO 1470
AG 1400 IF Y>9 THEN GOTO 1450
ZV 1410 LOCATE X,Y,Z:IF Z=20 OR Z=148 THE
N GOTO 1430
XS 1420 POSITION X,Y:? "+" :Y=Y+1:GOTO 140
0
ES 1430 T(X-2)=T(X-2)+(Y=3)+2*(Y=4)+4*(Y=
5)+8*(Y=6)+16*(Y=7)+32*(Y=8)+64*(Y=9)

```

```

XY 1440 POSITION X,Y:? "+" :Y=Y+1:GOTO 140
0
QF 1450 POKE CHORG+10*(C-32)+X-2,T(X-2)
IL 1460 X=X+1:GOTO 1390
XW 1470 GOSUB 590:GOSUB 490
BF 1480 RETURN
JI 1490 REM DESCENDER
MM 1500 POSITION 16,5:? " ":POSITION 16,7
:? "*" :POSITION 16,9:? " ":POSITION 16,
11:? " ":POSITION 16,13:? " "
BJ 1510 SPV=60-D*20:SDV=10:SVV=6:STV=2:GO
SUB 2650
ZM 1520 IF D=1 THEN POSITION 30,7:? "on/o
ff":POKE CHORG+10*(C-32),1
PE 1530 IF D=0 THEN POSITION 30,7:? "on/O
ff":POKE CHORG+10*(C-32),0
FG 1540 POSITION 16,5:? "*" :POSITION 16,7
:? " ":POSITION 16,9:? " ":POSITION 16
,11:? " ":POSITION 16,13:? " "
AY 1550 RETURN
WY 1560 REM LOAD PRINTER
GK 1570 POSITION 16,5:? " "
DU 1580 POKE 712,56:POSITION 5,13:? "Is T
he Printer Ready (Y/N) ? " :GOSUB
2680
HC 1590 POKE 764,255
QJ 1600 IN=PEEK(764):IF IN=255 THEN GOTO
1600
E5 1610 GOSUB 2680
OF 1620 IF IN=43 THEN POKE 764,255:GOTO 1
650:REM "Y"
CD 1630 IF IN=35 THEN POKE 764,255:GOTO 1
970:REM "N"
UH 1640 GOTO 1590
RJ 1650 TRAP 1910:OPEN #4.8,0,"P":POSITI
ON 5,13:? "Downloading Font...Please
Wait"
PY 1660 REM LOAD PRINTER RAM NORMAL CHAR
TX 1670 PRINT #4;E5;CHR$(42);CHR$(0);
WB 1680 C=32:REM DOWNLOAD NEW CHAR'S
IV 1690 IF C>124 THEN GOTO 1750
CX 1700 FOR I=1 TO 9:T(I)=PEEK(CHORG+10*(
C-32)+I):NEXT I:D=PEEK(CHORG+10*(C-32)
)
SP 1710 SUM=T(1)+T(2)+T(3)+T(4)+T(5)+T(6)
+T(7)+T(8)+T(9):IF SUM=0 THEN C=C+1:GO
TO 1690:REM CHAR. THERE?
VS 1720 PRINT #4;E5;CHR$(42);CHR$(1);CHR$(
C);CHR$(D);
RT 1730 PRINT #4;CHR$(T(1));CHR$(T(2));CH
RS(T(3));CHR$(T(4));CHR$(T(5));CHR$(T(
6));CHR$(T(7));CHR$(T(8));CHR$(T(9));
ZF 1740 C=C+1:GOTO 1690
UJ 1750 REM SELECT DOWNLOADED CHAR'S
XX 1760 PRINT #4;E5;CHR$(36);CHR$(1);
MC 1770 REM PRINT CHARACTERS?
IF 1780 POKE 712,102:POSITION 5,13:? "Pr
int Characters? (Y/N) : " :GOSUB
2680
HG 1790 POKE 764,255
TP 1800 IN=PEEK(764):IF IN=255 THEN GOTO
1800
PS 1810 IF IN=43 THEN POKE 764,255:GOTO 1
840:REM "Y"
AQ 1820 IF IN=35 THEN POKE 764,255:GOTO 1
960:REM "N"
RF 1830 GOTO 1800
VK 1840 REM PRINT
GW 1850 PRINT #4:PRINT #4,FILES:PRINT #4
QK 1860 PRINT #4,:FOR I=32 TO 94:PRINT #4
;CHR$(I):NEXT I
WC 1870 PRINT #4
EM 1880 PRINT #4,:FOR I=95 TO 124:PRINT #
4;CHR$(I):NEXT I
UE 1890 PRINT #4:PRINT #4
UK 1900 GOTO 1960
HA 1910 REM TRAP PRINTER
XR 1920 FOR I=1 TO 3
PA 1930 POKE 712,0:POSITION 9,19:? "PRINT
continued on next page

```

```

ER NOT CONNECTED !":GOSUB 2680
LJ 1940 POKE 712,66:POSITION 5,19:? "
                                ":GOSUB
                                3000
XV 1950 NEXT I:TRAP 40000
PG 1960 CLOSE #4
XL 1970 POKE 712,12:POSITION 5,13:? "
                                START Load Printer ":GOSUB 28
                                40
OV 1980 POSITION 16,5:? "*" :GOSUB 2680:RE
TURN
FU 1990 REM DISK DIRECTORY
NC 2000 GRAPHICS 0:POKE 710,218:POKE 712,
218:POKE 709,0:POKE 752,1:TRAP 2080
UE 2010 POSITION 13,0:? "DISK DIRECTORY"
IV 2020 OPEN #1,6,0,"D:* .FNT"
CU 2030 INPUT #1,IN$
TE 2050 IF ASC(IN$(1,1))>46 THEN 2030
HO 2060 IF IN$(3,9)="AUTORUN" THEN 2030
SR 2070 ? :? " " " :IN$(1,14)::GOT
O 2030
FO 2080 CLOSE #1:TRAP 2140:GOSUB 2840
HF 2090 POSITION 7,22:? INP$:
ZU 2095 POSITION 25,22:? N$:POSITION 24,2
2
SE 2100 INPUT IN$:IF IN$(1,2)<>"D:" THEN
FILES(1,2)="D":FILES(3,20)=IN$
JC 2110 IF IN$(1,2)="D:" THEN FILES=IN$
AB 2115 FOR I=1 TO LEN(FILES):IF FILES(I,
I)="" THEN FILES(I)=".FNT":POP :GOTO
2120
FT 2116 NEXT I
ZL 2117 FILES(I-1)=".FNT"
LF 2120 POKE 560,DLL:POKE 561,DLH:POKE 88
,TEXTL:POKE 89,TEXTH:POKE 710,12:IN$=""
"
XV 2130 POKE 709,4:RETURN
RJ 2140 POKE 560,DLL:POKE 561,DLH:POKE 88
,TEXTL:POKE 89,TEXTH:POKE 710,8:POKE 7
12,8:IN$="" :POKE 709,4
NB 2150 CLOSE #1
KA 2160 POSITION 4,19:? " cannot":IN
P$(2,5):"Font!" " :GOSUB
2680
OA 2170 GOSUB 3000:GOSUB 3000:POKE 710,12
:POKE 712,12
IP 2180 POP :TRAP 40000:POSITION 4,19:? "
                                ":GOTO 640
GY 2190 REM MEMORY MAP
IK 2200 RAMTOP=PEEK(106):ORG=RAMTOP-48
DX 2210 CHORG=256*ORG
SL 2220 POKE 88,0:POKE 89,ORG:? CHR$(125)
:REM CLEAR CHARACTER MEMORY
OG 2230 DLL=0:DLH=RAMTOP-44:DL=DLL+256*DL
H
LG 2240 TEXTL=0:TEXTH=RAMTOP-40:TEXT=TEXT
L+256*TEXTH
QL 2250 POKE 88,0:POKE 89,TEXTH:? CHR$(12
5):REM CLEAR TEXT MEMORY
JN 2260 SCL=0:SCH=RAMTOP-32:SC=SCL+256*SC
H
PY 2270 POKE 88,0:POKE 89,5CH:? CHR$(125)
:REM CLEAR SCREEN MEMORY
BC 2280 RETURN
DP 2290 REM IOCB'S AND DIM'S
TO 2300 DIM T(9):DIM E$(5):E$=CHR$(27)
GI 2310 DIM IN$(20),FILES$(20),CIOS$(7),NS(
17)
KH 2320 CIOS$="hhhsLVE":D=0
AP 2330 RETURN
BO 2340 REM SCREEN SETUP
XK 2350 GRAPHICS 0:POKE 709,4:POKE 710,12
:POKE 712,12:POKE 752,1:GOSUB 2840
BB 2360 POKE DL,112:POKE DL+1,112:POKE DL
+2,112:POKE DL+3,66:POKE DL+4,TEXTL:PO
KE DL+5,TEXTH
FT 2370 FOR I=6 TO 24:POKE DL+I,2:NEXT I
HZ 2380 POKE DL+25,79:POKE DL+26,SCL:POKE
DL+27,5CH
YJ 2390 FOR I=28 TO 59:POKE DL+I,15:NEXT

```

```

I
RI 2400 POKE DL+58,65:POKE DL+59,DLL:POKE
DL+60,DLH
GN 2410 POKE 560,DLL:POKE 561,DLH:POKE 88
,TEXTL:POKE 89,TEXTH:POKE 87,0
PL 2420 FOR I=39968 TO 40000:POKE I,0:NEX
T I
EW 2430 ? :? :? " "
VG 2440 ? " |+++++|""
VJ 2450 ? " |+++++|""
VM 2460 ? " |+++++|""
VP 2470 ? " |+++++|""
VS 2480 ? " |+++++|""
VV 2490 ? " |+++++|""
DI 2500 ? " |+++++|""
AL 2510 ? " " "
WA 2520 POSITION 18,3:? "KEYBOARD COMMAND
5"
PI 2530 POSITION 18,5:? "E Edit Next Char
acter"
GK 2540 POSITION 18,7:? "D Descender on/D
E"
GS 2550 POSITION 18,9:? "S Save Font"
MN 2560 POSITION 18,11:? "L Load Font"
VU 2570 POSITION 3,11:? "Dot Matrix"
NR 2580 POSITION 5,13:? " STA
RT Load Printer"
GT 2590 POSITION 9,0:? "GEMINI 10X FONT M
AKER":POSITION 15,1:? "by James Duffin
"
YC 2600 POSITION 3,15:FOR I=32 TO 62:? CH
R$(I)::NEXT I
HX 2610 POSITION 3,16:FOR I=63 TO 93:? CH
R$(I)::NEXT I
ID 2620 POSITION 3,17:FOR I=94 TO 124:? C
HR$(I)::NEXT I
KC 2630 DIM INP$(17)
AY 2640 RETURN
VV 2650 SOUND 0,SPV,SDV,10:POKE 20,0
EN 2660 IF PEEK(20)<STV THEN 2660
YI 2670 SOUND 0,0,0,0:RETURN
YK 2680 POKE 544,100
JP 2682 SOUND 0,35,14,INT(PEEK(544)/15):I
F PEEK(544)>0 THEN 2682
DB 2684 SOUND 0,0,0,0:POKE 66,0:RETURN
IJ 2690 REM EXPLANATION
EL 2700 GRAPHICS 0:POKE 712,30:POKE 710,3
0:POKE 709,0:POKE 752,1:GOSUB 2840
JA 2710 ? :? "The Gemini 10X Font Maker":
? "
                                by JAMES DUFFIN":? "
                                is a program which allows you to"
TT 2720 ? "make your own character sets a
nd":? "download them to a Gemini 10X P
rinter."
BS 2730 ? "Once downloaded, the printer w
ill use this font until switched off."
TB 2740 ? :? "IMPORTANT! When making the
dot image":? "of a character, horizont
al dots must"
GZ 2750 ? "have one space between them, b
ut":? "vertical dots need not."
TI 2760 ? :? "Use the joystick and button
to select":? "the character to edit,
and then use"
FE 2770 ? "the joystick and button to mak
e the":? "dot image. Press D to toggle
the"
VC 2780 ? "descender mode on/off, and E t
o store"
JQ 2790 ? "the image and edit the next ch
aracter."
YK 2800 ? " PRESS ANY KEY TO BEGIN"
AL 2810 IF PEEK(764)=255 THEN 2810
CD 2830 POKE 764,255:RETURN
MF 2840 REM DISABLE BREAK KEY
ML 2850 I=PEEK(16):IF I>127 THEN I=I-128:
POKE 16,I:POKE 53774,I
NN 2860 POKE 77,0
BL 2870 RETURN

```



```
GX 3000 POKE 20,0
HN 3010 IF PEEK(20)<3 THEN 3010
AH 3020 RETURN
```

LISTING 2

```
HD 10 REM EPSON FX80 FONT MAKER
BD 410 Y=3:RESTORE 480:IF X>11 THEN SOUND
    0,0,0,0:RETURN
ES 430 IF Y>9 THEN X=X+1:GOTO 410
CL 470 Y=Y+1:GOTO 430
IR 510 Y=3:RESTORE 580:IF X>11 THEN SOUND
    0,0,0,0:POKE 88,TEXTL:POKE 89,TEXTH:P
    OKE 87,0:RETURN
FU 530 IF Y>9 THEN X=X+1:GOTO 510
DC 570 Y=Y+1:GOTO 530
BO 1430 T(X-2)=T(X-2)+64*(Y=3)+32*(Y=4)+1
    6*(Y=5)+8*(Y=6)+4*(Y=7)+2*(Y=8)+(Y=9)
QU 1580 POKE 712,56:POSITION 5,13:? "IS
    DIP switch 1-4 off? (Y/N) ":GOSUB 268
    0
```

```
RJ 1630 IF IN=35 THEN POKE 764,255:POSITI
    ON 5,13:? "TURN OFF DIP SWITCH 1-4
    ":GOSUB 2680:GOTO 1970
NG 1670 PRINT #4;ES;CHR$(58);CHR$(0);CHR$
    (0);CHR$(0);
BD 1720 PRINT #4;ES;CHR$(38);CHR$(0);CHR$
    (C);CHR$(C);:IF D=0 THEN PRINT #4;CHR$
    (139);
YG 1725 IF D=1 THEN PRINT #4;CHR$(11);
GK 1735 PRINT #4;CHR$(0);CHR$(0);
BV 1760 PRINT #4;ES;CHR$(37);CHR$(1);CHR$
    (0);
GS 2590 POSITION 9,0:? "EPSON FX80 FONT M
    AKER":POSITION 15,1:? "by James Duffin
    "
FF 2710 ? :? "The EPSON FX80 Font Maker":
    ? " by JAMES DUFFIN":? "
    is a program which allows you to"
CY 2720 ? "make your own character sets a
    nd":? "download them to an Epson FX80
    printer"
```

now print those Atari special characters!

CUSTOM PRINT

Article on page 21.

LISTING 1

```
NH 1 REM CUSTOM PRINT
KN 2 REM BY MATTHEW J.W. RATCLIFF
QK 3 REM ANTIC MAGAZINE
UA 5 CS=PEEK(106)-8:POKE 106,CS:GRAPHICS
    0:DIM CSTS(20):CSTS=""
BP 10 DIM PROGS(182):CSET=0:GRAPHICS 0:OS
    ET=PEEK(756)
DI 20 DATA 104,240,10,201,2,240,7,170,104
    ,104,202,208,251,96
WP 30 DATA 104,133,213,104,133,212,104,10
    4,133,216,160,0,177,212
PP 40 DATA 230,212,208,2,230,213,160,0,13
    2,217,201,128,144,4
VQ 50 DATA 41,127,198,217,170,133,218,224
    ,96,176,11,169,64,224
LG 60 DATA 32,144,2,169,224,24,101,218,13
    3,214,169,0,133,215
FH 70 DATA 162,3,6,214,38,215,202,208,249
    ,24,173,244,2,101
JW 80 DATA 215,133,215,160,0,240,2,208,18
    7,162,0,177,214,230
IH 90 DATA 214,208,2,230,215,69,217,149,2
    28,232,224,8,208,239
ST 100 DATA 162,0,22,228,42,232,224,8,208
    ,248,153,220,0,200
GH 110 DATA 192,8,208,238,162,0,181,220,2
    01,155,208,4,169,151
LM 120 DATA 149,220,232,224,8,208,241,162
    ,112,169,11,157,66,3
CR 130 DATA 169,220,157,68,3,169,0,157,69
    ,3,169,0,157,73
XH 140 DATA 3,169,8,157,72,3,32,86,228,19
    8,216,208,166,96
IQ 150 RESTORE 20:FOR I=1 TO 182:READ A:P
    ROG$(I,I)=CHR$(A):NEXT I:PROGS(136,136
    )=CHR$(155)
EG 160 DIM A$(480),B$(240),C$(240),F$(20)
    ,TTL$(120),DRV$(8):OPEN #2,4,0,"K:"
UH 170 ? "K":POKE 710,114:? "+ICUSTOM PR
    INT 11 By Mat Rat"
UZ 175 GOSUB 900
RO 180 ? "Directory of TEXT-FILES DISK"
```

```
:GOSUB 2400
YN 190 ? "Text filename to CUSTOM-PRINT.
    ..":GOSUB 2510
IN 250 ? "K":? "CHARACTERS PER LINE:"
HW 260 ? "[F1] 60 [F2] 120 [F3] 240 ":GET #
    2,A:? CHR$(27);CHR$(A)
UN 270 A=A-48:IF A<1 OR A>3 THEN ? "INVALU
    E ERROR!":GOTO 260
OQ 280 CL=A*60:IF A=3 THEN CL=CL+60
FC 290 ON A GOTO 300,310,320
SX 300 DENS=ASC("K"):GOTO 330:REM NORMAL
    DENSITY GFX
TJ 310 DENS=ASC("L"):GOTO 330:REM DUAL DE
    NSITY GFX
CT 320 DENS=ASC("Z"):REM QUAD DENSITY GFX
TQ 330 ? "K":? "VERTICAL LINE SPACING:"
US 340 ? "[F1] Stacked [F2] Single"
WV 350 ? "(Stacked will appear)"
MJ 360 ? "exactly as ATARI screen) ":GET
    #2,A:? CHR$(27);CHR$(A)
HL 370 A=A-48:V5=8*A:IF A<1 OR A>2 THEN ?
    "WRANGE ERROR":GOTO 340
MH 380 ? "K":? "TEXT CONTROL:"
WK 390 ? "[F1] Center Text [F2] Block Left"
HH 400 ? "[F3] Block Right (block left nor
    mal)":GET #2,A:? CHR$(27);CHR$(A)
CJ 410 A=A-48:IF A<1 OR A>3 THEN ? "WRANG
    E ERROR":GOTO 390
LX 420 CRCTL=A:? :? "Type a [F1] & Press
    [RETURN] key ":INPUT TTLS:PG=1
PX 422 IF LEN(TTLS)>0 THEN GOTO 428
DU 424 ? "Skip Perforations (Y/N) ":TRAP
    424:GET #2,A:IF A=ASC("N") THEN PG=0:
    GOTO 430
AB 425 IF A=ASC("Y") THEN PG=-1:GOTO 430
QB 426 GOTO 424
VE 428 IF PG THEN TTLS=(LEN(TTLS)+1)=" PG
    "
GN 430 ? "K":? "* GET PRINTER READY *"
VV 440 ? "AND BE SURE DISK WITH LISTED"
HV 450 ? "FILE ";F$;" IS READY "
```

continued on next page

```

QD 460 ? "AND PRESS RETURN KEY " : GET #2,
A: ? : ?
DF 462 ? "PRESS ESCAPE KEY TO ABORT "
XY 465 IF CSET <> 0 THEN POKE 756, CSET
GO 470 TRAP 800: CLOSE #1: OPEN #1, 4, 0, FS
NN 480 CLOSE #7: OPEN #7, 8, 0, "P: "
VC 490 ? #7: "EA": CHR$(VS): : REM SET VERTIC
AL SPACING
UA 500 ? #7: "EN": CHR$(0): : ? #7: "EO": REM S
ET FORM SKIP FEATURE TO 0, COUNT FORMS
NJ 510 TRAP 800: LINES=0: IF PG THEN GOSUB
2200
DL 520 IF LINES >= 48 * (VS=16) + 96 * (VS=8) - 8 A
ND PG <> 0 THEN GOSUB 2180
PD 522 IF PEEK(764) <> 255 THEN GET #2, A: IF
A=27 THEN GOTO 830
SI 525 INPUT #1, A: B$="" : LINES=LINES+1: IF
LEN(A$) > CL THEN LINES=LINES+1: B$=A$(C
L+1): A$(CL+1)=""
KB 530 IF A$="" THEN GOTO 665
IG 540 REM SET UP A$ ACCORDING TO PRINT C
ONTROL
WP 550 ON CRCTL GOTO 560, 640, 600
TR 560 A=INT((CL-LEN(A$))/2): IF A=0 THEN
640
LC 570 C$(1)="" : C$(240)="" : C$(2)=C$
BV 580 C$(A)=A$: A$="" : A$=C$: GOTO 640
CG 600 IF LEN(A$)=CL THEN 640
RQ 610 C$=A$: A$(1)=""
BL 620 A$(480)="" : A$(2)=A$
KA 630 A$(CL-LEN(C$))=C$
IV 640 A=8*LEN(A$): HI=INT(A/256): LO=A-256
*HI
XE 650 ? #7: CHR$(27): CHR$(DENS): CHR$(LO):
CHR$(HI):
DY 660 A=USR(ADR(PROGS), ADR(A$), LEN(A$))
LD 665 ? #7
FJ 670 IF B$ <> "" THEN A$=B$: B$="" : GOTO 55
0
OL 680 GOTO 520
EB 800 IF PEEK(195)=136 THEN GOTO 850
MV 810 ? "*" ERROR ": PEEK(195): " AT LINE "
: PEEK(186)+256*PEEK(187): " *
IS 820 CLOSE #1: CLOSE #7: GOTO 175
PD 830 POKE 756, 0SET: CLOSE #1: CLOSE #7: ?
"* PRINT ABORTED *"
RB 840 GOTO 860
QH 850 POKE 756, 0SET: ? : ? "*" END OF FILE
REACHED *
IO 860 ? : ? "[L1] More lists [L2] Quit ": : G
ET #2, A: A=A-48
RA 870 IF A<1 OR A>2 THEN ? "WRANGE ERROR
": GOTO 860
CP 875 CLOSE #1: CLOSE #7
ZO 880 ON A GOTO 170, 890
FP 890 POKE 106, PEEK(106)+8: GRAPHICS 0: ?
"* END *": END
RU 900 ? : ? "[L1] Load & Print with"
TG 910 ? " custom character set."
HJ 920 ? "[L2] Print with ATARI Set."
NU 922 IF CST5 <> "" THEN ? "[L3] Use ": CST5
: " to print."
UU 930 TRAP 960: GET #2, A: A=A-48: ? A
AA 940 IF A=1 THEN 970
JE 950 IF A=2 THEN CSET=0: RETURN
QI 955 IF A=3 THEN CSET=C5: RETURN
DM 960 ? "INPUT ERROR, 1 OR 2 ?": GOTO 93
0
AX 970 ? "Directory of C-SET disk": GOSUB
2400
AH 980 ? "C-SET Filename to load...": GO
SUB 2500
HM 1100 CSET=C5: ? "K": FOR I=0 TO 255: ? CH
R$(27): CHR$(I): : NEXT I: ?
VD 1110 ? "Working..."
LP 1120 TRAP 2000
UV 1130 CLOSE #3: OPEN #3, 4, 0, FS: CST5=FS
ZQ 1140 POKE 756, CSET
KP 1150 POKE 882, 7: POKE 884, 0: POKE 885, C5
ET

```

```

YW 1160 POKE 888, 0: POKE 889, 128
TX 1170 A=USR(ADR("HWOLV"))
ON 1180 LN=256*PEEK(889)+PEEK(888): ER=PEE
K(883): CLOSE #3: POKE 756, 0SET
JV 1190 IF LN <> 1024 THEN ? "NO NOT VALID
CHARACTER SET >": FS: GOTO 900
ME 1200 IF ER <> 136 THEN ? "*" I/O ERROR ":
ER": " *": GOTO 900
WL 1210 POKE 756, 0SET: RETURN
KL 2000 ? "I/O ERROR ": PEEK(195):
YK 2010 ? " AT LINE ": PEEK(186)+256*PEEK(
187): CLOSE #1: CLOSE #2: CLOSE #3: END
NJ 2100 TRAP 2130
II 2110 CLOSE #5: OPEN #5, 4, 0, FS
FK 2120 CLOSE #5: RETURN
ZS 2130 CLOSE #5: FS="" : RETURN
NR 2180 IF LINES=VS*6-8 OR LINES=0 THEN ?
#7
IV 2190 FOR I=1 TO 6+(VS=8): ? #7: NEXT I: ?
#7: "EA": CHR$(8): ? #7: "EA": CHR$(VS):
WE 2200 ? #7: ? #7: IF PG < 0 THEN GOTO 2270
MI 2210 A=LEN(TTL$)*8: HI=INT(A/256): LO=A-
256*HI
ZD 2220 ? #7: CHR$(27): CHR$(DENS): CHR$(LO)
: CHR$(HI):
CM 2230 A=USR(ADR(PROGS), ADR(TTL$), LEN(TT
L$))
SH 2240 A$=STR$(PG): PG=PG+1: A=8*LEN(A$): H
I=INT(A/256): LO=A-256*HI
ZM 2250 ? #7: CHR$(27): CHR$(DENS): CHR$(LO)
: CHR$(HI):
LJ 2260 A=USR(ADR(PROGS), ADR(A$), LEN(A$))
HM 2270 ? #7: ? #7
FI 2290 LINES=1: RETURN
FL 2400 TRAP 2400: ? "DRIVE # (1-4) ": : GET
#2, A: A=A-48: ? A
RC 2410 IF A<1 OR A>4 THEN 2400
JM 2420 DRV$="D": DRV$(2, 2)=STR$(A): DRV$(3
, 3)=""
SQ 2430 FS=DRV$: FS(4)="" * *
ZU 2440 CLOSE #1: TRAP 2000: OPEN #1, 6, 0, FS
: I=1: ? "K": ? " DISK DIRECTORY FOR DR
IVE #0": CHR$(A+176): "D"
CP 2450 INPUT #1, A$: ? A$: IF A$(4, 5)="" F"
THEN 2490
CH 2460 IF INT(I/2)=I/2 THEN ? : GOTO 2480
BB 2470 ? " II":
ZB 2480 I=I+1: GOTO 2450
UP 2490 CLOSE #1: ? : ? " > END 0
HI+4[F FILE < " : RETURN
FM 2500 ? "From drive # ": DRV$
HD 2510 ? "<TYPE filename.ext ONLY & PRES
S [RND]>"
CT 2520 ? "Press RTN only for another DIR
ECTORY"
NQ 2530 TRAP 2530: INPUT A$: IF LEN(A$)=0 T
HEN GOSUB 2400: GOTO 2500
IJ 2540 FS=DRV$: FS(4)=A$
NU 2550 TRAP 2560: CLOSE #5: OPEN #5, 4, 0, FS
: CLOSE #5: GOTO 2570
GZ 2560 CLOSE #5: ? "File ": FS: " does not
exist": GOTO 2510
BF 2570 RETURN

```

LISTING 2

```

AI 95 REM NECFIX - IMPORTANT TO INCLUDE
DA 96 REM ALL REM LINES!!
WG 100 DATA 162, 0, 22, 228, 106, 232, 224, 8, 20
8, 248, 153, 220, 0, 200
SP 165 DIM DS(10)
ZC 250 DENS=A$(5): CL=60
QI 260 REM ONLY 60 CHARACTERS/LINE ON NEC
IL 270 REM SINCE SINGLE DENSITY GRAPHICS
ONLY.
RD 280 REM
RF 290 REM
QO 300 REM

```

```

QQ 310 REM
QS 320 REM
VI 370 A=A-48:V5=16*A:IF A<1 OR A>2 THEN
? "WRANGE ERROR":GOTO 330
YP 490 ? #7;"ET";STR$(V5);
LJ 500 ? #7;CHR$(24);:REM CANCEL LOGIC SE
EKING MODE FOR BETTER COLUMNAR PRINTS
ZQ 520 IF LINE$>=48*(V5=32)+96*(V5=16)-8
AND PG<>0 THEN GOSUB 2180
CL 640 A=8*LEN(A$):GOSUB 2600

```

```

KO 650 ? #7;CHR$(27);CHR$(DEN5);D5;
ZK 2190 FOR I=1 TO 5+(V5=16):? #7:NEXT I:
? #7;"ET16":? #7;"ET";STR$(V5);
FT 2210 A=LEN(TTL5)*8:GOSUB 2600
CS 2220 ? #7;CHR$(27);CHR$(DEN5);D5;
KO 2240 A$=STR$(PG):PG=PG+1:A=8*LEN(A$):G
OSUB 2600
DB 2250 ? #7;CHR$(27);CHR$(DEN5);D5;
EX 2600 D$="0000":D=(A>9)+(A>99)+(A>999):
D$(4-D,4)=STR$(A):RETURN

```

the screen dump you've been waiting for

KWIK DUMP

Article on page 12.

LISTING 1

```

SH 10 REM QUICK DUMP
MV 20 REM (c) 1984 BY JERRY ALLEN
BC 30 REM P.O. BOX 2205, REDONDO BEACH
VO 40 REM CALIF. 90278
MS 100 REM INITIALIZATION
MJ 110 TRAP 500:DIM LOD$(28),A$(81),PRNT$(
192),GRAF$(6),J$(18),FILE$(18),KLR$(6
)
IJ 120 GOTO 1010:REM *****DON'T TYPE THIS
LINE OR 1000 TO END IF YOU DON'T NEED
HELP WITH THE NEXT TWO LINES*****
GD 130 LOD$="hN hR hU hT hY hX hW hV h
"
CW 140 A$="hh hK hN hM hP hQ hR hS hT
hU hV hW hX hY hZ h[ h\ h] h^ h_ h` h~ h
h"
EA 150 A$(27,27)=CHR$(155):PRNT$="*":PRNT
$(192)=PRNT$:PRNT$(2)=PRNT$:POKE 710,0
:POKE 709,40
IX 160 ? "KCHOOSE":? "E EPSON/GEMINI":?
"2 NEC 8023":? "3 PROWRITER 8510":INPU
T T:GOSUB 600+T
NN 200 REM GET DIRECTORY
BE 210 CLOSE #1:? "K":POKE 710,0:POKE 709
,40:? "INSERT DISK DRIVE #1, PRESS RET
URN":INPUT J$:OPEN #1,6,0,"D:*.*)"
JP 220 ? "K":TRAP 230:FOR N=0 TO 63:INPUT
#1,FILE$:POSITION 2+19*(N/2)=INT(N/2
),INT(N/2):? FILE$:NEXT N
QO 230 TRAP 500:POP :CLOSE #1:? ? "ENTER
FILENAME":INPUT FILE$
QC 240 IF FILE$(1,2)<>"D:" AND FILE$(1,3)
<>"D1:" AND FILE$(1,3)<>"D2:" THEN J$=
FILE$:FILE$(1,2)="D":FILE$(3)=J$
DQ 300 REM FILL SCREEN
HB 310 GRAPHICS 8+16:POKE 710,15:POKE 709
,0:CLOSE #1:OPEN #1,4,0,FILE$:SLOC=PEE
K(88)+PEEK(89)*256
ZA 320 X=USR(ADR(LOD$),SLOC,7680):CLOSE #
1
SN 400 REM PRINT ROUTINE
IN 410 OPEN #1,8,0,"P":SLOC=SLOC+START
SH 420 FOR N=A TO B STEP C:X=USR(ADR(A$),
SLOC+N,ADR(PRNT$),T):? #1:GRAF$:PRNT$:
NEXT N:POKE 764,255
EA 430 IF PEEK(764)=255 THEN 430
QQ 440 POKE 764,255:GOTO 210
SA 500 REM ERROR ROUTINE
KR 510 ? "K":A=PEEK(195):IF A=170 THEN ?
"BAD FILENAME!"
HH 520 IF A=138 THEN ? "DEVICE TURNED OFF
OR NOT CONNECTED!"
MD 530 IF A=5 OR A=8 OR A=12 THEN ? "INPU

```

```

T ERROR!"
QN 540 ? "ERROR ":A:" e ":PEEK(186)+PEEK(
187)*256
WH 550 FOR N=1 TO 500:X=USR(ADR("hN hR hU
hT hY hX hW hV h
)):NEXT N:RUN
VC 600 REM PRINTER CODES
AR 601 GRAF$="EKQ":LPRINT "EA":KLR$="e
":A=0:B=39:C=1:START=7640:RETURN
YH 602 GRAF$="E50192":LPRINT "E"ET16EN":K
LR$="E<EAEN":A=39:B=0:C=-1:START=0:RET
URN
JW 603 GRAF$="E50192":LPRINT "E[ET16EN":K
LR$="E]EAEN":A=39:B=0:C=-1:START=0:RET
URN
NN 1000 REM *****SELF DELETING STRING WRI
TER SECTION*****
UR 1010 RESTORE :? "K120"
UO 1020 ? "130 LOD$=:CHR$(34):POKE 766,
1:FOR N=1 TO 28:READ A:? CHR$(A):NEXT
N:?
AO 1030 ? "140 A$=:CHR$(34):FOR N=1 TO
81:READ A:? CHR$(A):NEXT N:?
QZ 1040 ? 1000:? 1010:? 1020:? 1030:? 104
0:? 1050:? 1060:? 1070:? 1080:? 1090:?
1100
UG 1050 ? ? "MOVE CURSOR TO LINE NUMBERS
":? "THEN PRESS RETURN":? "THEN SAVE A
ND RUN AGAIN":POKE 766,0
VT 1060 DATA 104,169,7,141,82,3,104,141,8
5,3,104,141,84,3,104,141,89,3,104,141,
88,3,162,16,32,86,228,96
YJ 1070 DATA 104,104,133,204,104,133,203,
104,133,206,104,133,205,160,0,132,207,
104,104,133,208,160,0,177,203,201,0
JN 1080 DATA 208,2,169,154,201,13,208,2,1
69,12,164,207,145,205,200,132,207,192,
192,240,32,165,208,201,2,176,13,56
DO 1090 DATA 165,203,233,40,133,203,176,2
14,198,204,144,210,24,165,203,105,40,1
33,203,144,201,230,204,176,197,96
KV 1100 REM E=ESC,E5C=ESC,E5ESC=ESC,SHIFT+CLEAR
^=CTRL+H ^=CTRL+T I=CTRL+B ^=INV,C
TRL+M ^=CTRL+.=CTRL+.,^=CTRL+.,

```

LISTING 2

```

NE 10 REM QUICK SAVE
MV 20 REM (c) 1984 BY JERRY ALLEN
BC 30 REM P.O. BOX 2205, REDONDO BEACH
VO 40 REM CALIF. 90278
MS 100 REM INITIALIZATION

```

continued on next page

```

BV 110 DIM SAVS(28)
LC 130 SAVS=""H) "R" h"U" h"t" h"Y" h"X" W* VQ+
"
IF 140 REM ="H) "=CNTL+K (THIRD CHAR) SEE
    LODS PROGRAM 1 FOR REST OF LINE
DP 200 REM FILL SCREEN
UP 210 GRAPHICS 24:COLOR 1
LA 220 FOR N=0 TO 10:PLOT N,N:DRAWTO 319-
    N,0+N:DRAWTO 319-N,191-N:DRAWTO 0+N,19
    1-N:DRAWTO 0+N,0+N:NEXT N
NS 230 FOR N=20 TO 80 STEP 5:PLOT N,N:DRA

```

```

WTO 319-N,0+N:DRAWTO 319-N,191-N:DRAWTO
0 0+N,191-N:DRAWTO 0+N,0+N:NEXT N
SN 240 FOR ANG=0 TO 6.3 STEP 0.1:E=SIN(AN
G)*45:D=COS(ANG)*90:PLOT D+160,E+96:DR
AWTO -D+160,-E+96:NEXT ANG
MB 300 REM SAVE PIC.DAT
GA 310 SLOC=PEEK(88)+PEEK(89)*256:CLOSE #
1:OPEN #1,8,0,"D:PIC.DAT":REM SLOC MUS
T BE FOUND AFTER GRAPHICS 8 COMMAND**
BT 320 X=USR(ADR(SAVS),SLOC,7680):CLOSE #
1:? "DONE!":END

```

print your own return address stickers

LABEL MAKER

Article on page 19.

LISTING 1

```

PJ 1 REM ADDRESS LABEL MAKER
YB 2 REM BY WILLIAM W. WATSON
QK 3 REM ANTIC MAGAZINE
MI 10 SETCOLOR 2,13,4
NF 20 DIM BDS(1),NS(27),SS(27),CZS(27),TB
S(27),TCS(13),QQS(3)
GY 30 CLOSE #3:OPEN #3,4,0,"K"
LB 40 POKE 752,0:POSITION 2,20:? "K":? :?
    "FOR BORDER":? " PRESS DESIRED KEY
    >":GET #3,K
WY 50 IF K<32 OR K>122 THEN 40
TU 60 BDS=CHR$(K)
DA 70 PRINT "K":POKE 752,1
BO 80 FOR T=0 TO 39:POSITION T,0:PRINT BD
S:NEXT T
LA 90 FOR T=0 TO 16:POSITION 39,T:PRINT B
DS:NEXT T
LX 100 FOR T=39 TO 0 STEP -1:POSITION T,1
6:PRINT BDS:NEXT T
PV 110 FOR T=16 TO 0 STEP -1:POSITION 0,T
:PRINT BDS:NEXT T
TP 120 FOR T=1 TO 13:TCS(T,T)=BDS:NEXT T
RP 130 POSITION 5,3:PRINT TCS;" ";TCS
BH 140 FOR T=4 TO 6:POSITION 4,T:PRINT BD
S;" 3 LINE ";BDS;" ";BDS;" 25 LE
TERS";BDS:NEXT T
UF 150 POSITION 5,7:PRINT TCS;" ";TCS
VN 160 POSITION 5,9:PRINT TCS;" ";TCS
TO 170 FOR T=10 TO 12:POSITION 4,T:PRINT
BDS;" 4 TO LABEL";BDS;" ";BDS;" GETH
NI 10K ";BDS:NEXT T
OB 180 POSITION 5,13:PRINT TCS;" ";TCS
OF 190 CLOSE #3:OPEN #3,4,0,"K"
FP 200 TRAP 200:POSITION 2,20:PRINT "IS T
HIS ALL RIGHT (Y/N)":PRINT "FOR SPECIA
L CHARACTER PRESS ESCAPE "":GET #3,K
UH 210 IF K=89 THEN 290
OH 220 IF K=27 THEN 250
SX 230 IF K=78 THEN 280
LZ 240 GOTO 200
HT 250 POSITION 2,20:PRINT "
"
LT 260 POSITION 2,20:PRINT "ENTER SPECIAL
CHARACTER #XXX":INPUT CHR
JH 270 BDS=CHR$(CHR):GOTO 70
WB 280 FOR T=1 TO 100:NEXT T:GOTO 40
WA 290 GOSUB 840
QX 300 POSITION 10,1:FOR T=1 TO 27:TB$(T,
T)=BDS:NEXT T:PRINT TB$
AX 310 POSITION 9,2:PRINT BDS;"
";BDS
BP 320 POSITION 9,3:PRINT BDS;"

```

```

";BDS
CH 330 POSITION 9,4:PRINT BDS;"
";BDS
RX 340 POSITION 10,5:PRINT TB$
WJ 350 GOSUB 850:GOSUB 860:GOSUB 870:GOSU
B 880
OB 360 CLOSE #3:OPEN #3,4,0,"K"
OR 370 POSITION 4,7:PRINT " TO EDIT PRESS
( 0 THRU (0=OK) 5 )":GET #3,K
NQ 380 IF K<48 OR K>53 THEN 370
SE 390 IF K=48 THEN 460
PT 400 IF K=49 THEN GOSUB 850
NJ 410 IF K=50 THEN GOSUB 860
OV 420 IF K=51 THEN GOSUB 870
QH 430 IF K=52 THEN GOSUB 880
TO 440 IF K=53 THEN 960
PM 450 GOTO 370
QU 460 POKE 82,7:POSITION 7,8
MW 470 PRINT "
TA 480 PRINT " <> PRINTER <> "
JK 490 PRINT " 1 TO RETURN TO EDIT "
XV 500 PRINT " 2 TO PRINT => "
SX 510 PRINT " NUMBER REQUIRE #> <"
KP 520 PRINT " PRINTING #> <"
JL 530 PRINT " DO YOU WANT MORE Y/N "
KW 540 PRINT " WANT ANOTHER LABEL Y/N "
YA 550 PRINT "
:POKE 82,0
KT 560 CLOSE #3:OPEN #3,4,0,"K":POSITION
28,11:PRINT " ":GET #3,K
LV 570 IF K<49 OR K>50 THEN 460
SQ 580 IF K=49 THEN 370
OS 590 IF K=50 AND Z=0 THEN 610
OO 600 GOTO 630
JK 610 TRAP 980:Z=1:CLOSE #3:LPRINT ;CHRS
(27);CHRS(36);CHRS(0);
ID 614 REM ALTER THE FOLLOWING PRINTER
CODES TO MATCH YOUR PRINTER'S EQUIV-
ALENT OF:
OV 615 REM CONDENSED, SUPERScript AND
LINE FEED OF 12/144
EV 620 LPRINT ;CHRS(15);LPRINT ;CHRS(27)
;CHRS(83);CHRS(0);LPRINT ;CHRS(27);CH
RS(51);CHRS(12);
FD 630 TRAP 980:POSITION 27,12:PRINT "
":POSITION 27,12:INPUT QQS:POSITION 27
,12:PRINT ">":QQ=VAL(QQS):Q=0
BG 635 IF QQ=0 THEN 460
TO 640 CLOSE #3:OPEN #3,4,0,"K":POSITION
6,17:POKE 752,1:PRINT "SET PRINTER TOP
OF LABEL AND PRESS ANY KEY TO RUN"
HQ 650 GET #3,K

```

```

KO 660 POSITION 6,17:PRINT "
"
VX 670 FOR Q=QQ TO 1 STEP -1
PH 680 POSITION 28,13:PRINT " ":POSITIO
N 28,13:PRINT Q
KV 690 FOR D=1 TO 2
XF 700 LPRINT
UO 710 LPRINT " ";TBS;" ";TBS
NX 720 LPRINT BDS;NS;BDS;" ";BDS;NS;BDS
XA 730 LPRINT BDS;SS;BDS;" ";BDS;SS;BDS
JP 740 LPRINT BDS;CZS;BDS;" ";BDS;CZS;BDS
UW 750 LPRINT " ";TBS;" ";TBS
EL 760 NEXT D
NV 770 IF Q=1 THEN POSITION 28,13:PRINT "
"
JP 780 NEXT Q
ZE 790 POKE 752,0:CLOSE #3:OPEN #3,4,0,"K
":POSITION 30,14:PRINT "N":GET #3,K
SV 800 IF K=89 THEN 630
RR 810 CLOSE #3:OPEN #3,4,0,"K":POSITION
30,15:PRINT "N":GET #3,K
DU 820 IF K=89 THEN 30
WJ 830 LPRINT "&e";CHR$(27);CHR$(36);CHR$(
0):CLOSE #3:PRINT "K":END
CC 840 PRINT "K":POSITION 10,0:PRINT "321
0987654321X1234567890123":RETURN
ID 850 POKE 752,0:POSITION 0,2:PRINT "1 N
AME =>":INPUT NS:RETURN
ZT 860 POSITION 0,3:PRINT "2 STREET>":IN
PUT SS:RETURN
KR 870 POSITION 0,4:PRINT "3 CITY,=>":POS
ITION 0,5:PRINT "5T, ZIP":POSITION 9,4:

```

```

INPUT CZS:RETURN
XV 880 POSITION 0,6:PRINT "4 BORDER=>";"
";BDS;" 5 SPECIAL CHR.=>":POSITION
10,6:INPUT BDS
AT 890 POSITION 10,6:PRINT BDS;" "
WF 900 FOR T=1 TO 27:TBS(T,T)=BDS:NEXT T
PH 910 POSITION 10,1:PRINT TBS
UA 920 POSITION 9,2:PRINT BDS;NS;BDS
AC 930 POSITION 9,3:PRINT BDS;SS;BDS
QD 940 POSITION 9,4:PRINT BDS;CZS;BDS
MP 950 POSITION 10,5:PRINT TBS:RETURN
IV 960 POSITION 30,6:INPUT CHR
JF 970 BDS=CHR$(CHR):GOSUB 890:GOTO 370
TW 980 FOR T=1 TO 6:POSITION 6,18:PRINT "
SOMETHING OFFG":NEXT T
BF 990 POSITION 6,18:PRINT "
":GOTO 460

```

LISTING 2

```

ND 170 FOR T=10 TO 12:POSITION 4,T:PRINT
BDS;"1 TO LABEL";BDS;" ";BDS;"6E
MINI 10K";BDS:NEXT T
QV 620 REM
RJ 690 REM
GQ 710 LPRINT " ";TBS
GU 720 LPRINT BDS;NS;BDS
JY 730 LPRINT BDS;SS;BDS
RF 740 LPRINT BDS;CZS;BDS
GY 750 LPRINT " ";TBS
RE 760 REM

```

assembly language

KEY BOARD COMMANDER

Article on page 67.

LISTING 1

```

JW 10 REM KEYCOMM.D.BAS
UX 20 REM BY PAUL DRIVER
RH 30 REM ANTIC MAGAZINE
MO 40 RESTORE 110:DIM A$(1)
IU 50 ? "Please insert DOS 2.05 disk":?
"and PRESS [RETURN].":INPUT AS
KP 60 ? "Creating AUTORUN.SYS file."
BL 70 OPEN #1,8,0,"D:AUTORUN.SYS"
YM 80 FOR X=1 TO 201:READ A:PUT #1,A:NEXT
X
RI 90 PUT #1,226:PUT #1,2:PUT #1,227:PUT
#1,2:PUT #1,158:PUT #1,6
KX 100 CLOSE #1
EY 110 DATA 255,255,0,6,155,6

```

```

UR 60 ? "Press [RETURN] when ready.":INP
UT BS
PY 70 B$(1,1)="*":B$(256)=B$:B$(2)=B$
NV 80 ? "Please wait..."
IB 90 S=ADR("HW*]V*]I] ]B]hOE]hOD]hOI]hO
H]V]C]T]O]")
UB 100 RESTORE 160
DF 110 FOR X=1 TO 201:READ A:B$(X,X)=CHR$(
A):NEXT X
CG 120 ? "Creating BOOT cassette now."
BC 130 POKE 764,12:OPEN #1,8,128,"C:"
PD 140 Z=USR$(S,ADR(B$),256)
LH 150 CLOSE #1
PG 160 DATA 0,2,250,5,0,6

```

LISTING 2

```

JH 10 REM KEYCOMM.C.BAS
UX 20 REM BY PAUL DRIVER
RH 30 REM ANTIC MAGAZINE
VD 40 DIM B$(256)
CK 50 ? "Please insert cassette into rec
order":? "as instructed in the article
."

```

LISTING 3

```

SQ 190 REM KEYDATA.LST
TA 200 DATA 169,6,133,13,169,181,133,12,1
69,6,133,11,169,187,133,10,169,60,141
XA 210 DATA 2,211,169,7,162,6,160,111,32,
92,228,169,6,141,156,6,169,0,141
EX 220 DATA 157,6,169,7,141,156,6,169,56,

```

continued on next page

```

141,8,2,169,6,141,9,2,96,173
BC 230 DATA 9,210,205,242,2,208,5,173,241
,2,208,35,173,9,210,201,159,208,10
WI 240 DATA 173,255,2,73,255,141,255,2,17
6,18,13,157,6,141,252,2,141,242,2
KW 250 DATA 169,3,141,241,2,169,0,133,77,
169,48,141,43,2,104,64,173,31,208
HT 260 DATA 41,6,205,156,6,240,23,141,156
,6,73,6,10,10,10,10,77,157
DO 270 DATA 6,141,157,6,240,2,9,4,141,200
,2,173,157,6,13,252,2,141,252
MR 280 DATA 2,76,98,228,158,6,192,6,165,1
2,141,182,6,165,13,141,183,6,165
BC 290 DATA 10,141,188,6,165,11,141,189,6
,76,0,6,32,0,6,76,0,6,32
HB 300 DATA 0,6,76,0,6

```

LISTING 4

```

10 ; KEYCOMM.ASM
20 ; BY PAUL DRIVER
30 ; ANTIC MAGAZINE
40 ATRACT = $4D
50 VKEYBD = $0208
60 SRTIMR = $022B
70 COLBAK = $02C8
80 INITAD = $02E2
90 KEYDEL = $02F1
0100 CH1 = $02F2
0110 CH = $02FC
0120 SSFLAG = $02FF
0130 CONSOL = $D01F
0140 KBCODE = $D209
0150 SETVBV = $E45C
0160 KITVBV = $E462
0170 *= $0600
0180 ;INITIALIZATION ROUTINE
0190 INIT LDA #PINIT/256
0200 STA $0D
0210 LDA #PINIT&255
0220 STA $0C
0230 LDA #DVINT/256
0240 STA $0B
0250 LDA #DVINT&255
0260 STA $0A
0270 LDA #60 ; turn off the
0280 STA $D302 ; cassette motor
0290 LDA #7 ; DEFERRED VBLANK
0300 LDX # >VBVRTN
0310 LDY # <VBVRTN

```

```


0320 JSR SETVBV
0330 LDA #6 ; INITIALIZE OLD
0340 STA OLD
0350 LDA #0 ; INITIALIZE LOCK
0360 STA LOCK
0370 LDA #7
0380 STA OLD
0390 LDA # <KYBDINT ;point to our
0400 STA VKEYBD ; keyboard
0410 LDA # >KYBDINT ;interrupt
0420 STA VKEYBD+1 ; routine
0430 RTS
0440 ;KEYBOARD INTERRUPT HANDLER
0450 KYBDINT LDA KBCODE
0460 CMP CH1
0470 BNE PIRQ3
0480 LDA KEYDEL
0490 BNE PIRQ4
0500 PIRQ3 LDA KBCODE
0510 CMP #59F ;CTRL-1
0520 BNE PIRQ1
0530 LDA SSFLAG
0540 EOR #5FF
0550 STA SSFLAG
0560 BCS PIRQ4
0570 PIRQ1 ORA LOCK ;OUR CUSTOMIZATIO
N
0580 STA CH
0590 STA CH1
0600 LDA #3
0610 STA KEYDEL
0620 LDA #0
0630 STA ATRACT
0640 PIRQ4 LDA #530
0650 STA SRTIMR
0660 PIRQ2 PLA
0670 RTI
0680 ;VERTICAL BLANK ROUTINE
0690 VBVRTN
0700 LDA CONSOL ;get console key
0710 AND #6 ;mask SELECT/OPTI
ON
0720 CMP OLD ;has it changed?
0730 BEQ EXIT ;branch if not
0740 STA OLD ;hold new value
0750 EOR #6 ;invert bits
0760 ASL A ;move to MSB
0770 ASL A
0780 ASL A
0790 ASL A
0800 ASL A
0810 EOR LOCK ;toggle value
0820 STA LOCK ;hold onto new va
l
0830 BEQ SKIP ;branch if 0
0840 ORA #4 ;turn up luminanc
e
0850 SKIP STA COLBAK
0860 EXIT LDA LOCK ;added for repeat
0870 ORA CH ;feature
0880 STA CH
0890 JMP KITVBV
0900 OLD *= **+1
0910 LOCK *= **+1
0920 PATCH LDA $0C
0930 STA PINIT+1
0940 LDA $0D
0950 STA PINIT+2
0960 LDA $0A
0970 STA DVINT+1
0980 LDA $0B
0990 STA DVINT+2
1000 JMP INIT
1010 PINIT JSR INIT
1020 JMP INIT
1030 DVINT JSR INIT
1040 JMP INIT
1050 *= INITAD
1060 .WORD PATCH

```

End Program Typing Agony Forever!

**Antic Magazine+
Disk Subscription**

**Instant Relief!
Only \$99.95
for 12 issues.**

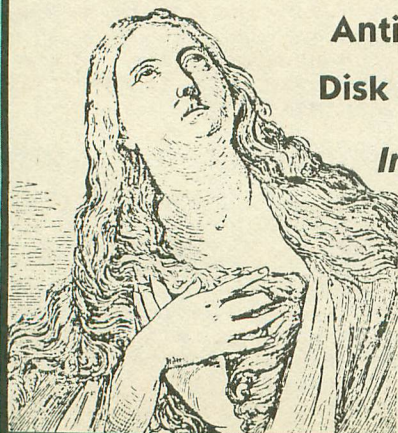

See Subscription
Insert for details.


```

:? #6:A5:NEXT A:GOSUB LI
QS 709 IF T=0 THEN GOSUB 2000:SOUND 0,0,0
,0:SOUND 1,0,0,0
BL 710 POSITION 0,0:? #6;"DDDDDDDDDDDDDDDD
DDDD":POSITION 0,1:? #6;"DDDDENERGY:D
DDDDT:DD"
FU 715 POSITION 0,21:? #6;"DDPPDDSCORE:D
DDDD":POSITION 0,22:? #6;"DDDDDDDDDD
DDDDDDDDDD"
ZN 717 POSITION 1+5H,21:? #6;"DD"
ZN 750 RETURN
TU 1100 DIM MMS(49)
GO 1105 MMS(1)="hh,0h,Nh,Yh,Lh&0-1XN"
QD 1110 MMS(24)="PWFofMjPh(LN,1)@"
ZO 1115 MMS(46)="LpW"
WT 1120 DIM KFS(465)
TA 1125 KFS(1)="*****a5*****"
OR 1130 KFS(24)="*Fo*****<*****0y*****"
RJ 1135 KFS(46)="*****Sa*****90*****"
DL 1140 KFS(68)="*****<*****of*****?>>?"
PB 1145 KFS(90)=">>?>>?>>?>>?>>?>>?>>?"
FM 1150 KFS(112)="*****K*****K*****"
FQ 1155 KFS(133)="*****9699*****590*****"
ZH 1160 KFS(154)="*****99*****99*****"
OJ 1165 KFS(175)="*****9966*****"
QU 1170 KFS(196)="*****99*****99*****"
SM 1175 KFS(217)="*****99*****99*****"
TN 1180 KFS(238)="*****99*****99*****"
XF 1185 KFS(259)="*****99*****99*****"
KZ 1190 KFS(280)="*****99*****99*****"
OX 1195 KFS(301)="*****99*****99*****"
YJ 1200 KFS(322)="*****99*****99*****"
YD 1205 KFS(343)="*****99*****99*****"
ND 1210 KFS(364)="*****99*****99*****"
YZ 1215 KFS(385)="*****99*****99*****"
LV 1220 KFS(406)="*****99*****99*****"
YP 1225 KFS(427)="*****99*****99*****"
RD 1230 KFS(448)="*****99*****99*****"
DV 1265 TM=PEEK(106):CB=TM-4:CA=CB*256:PO
KE 106,CB-1:GRAPHICS 17

```

```

ZF 1270 X=USR(ADR(MMS),ADR(KFS),CA,1024)
RC 1275 POKE 756,CB
KC 1277 T=0:E=0:GOSUB 700
XR 1279 POKE 106,PEEK(740)
VL 1280 DATA 0,0,0,28,54,127,0,0,0
YD 1285 A=PEEK(106)-24:POKE 54279,A:START
=256*A:POKE 559,46:POKE 53277,3
LC 1290 FOR T=START+512 TO START+1024:POK
E T,0:NEXT T
OL 1293 RESTORE 1280
WT 1295 FOR I=START+580+0 TO START+588+0:
READ X:POKE I,X:NEXT I
LN 1300 POKE 623,4:POKE 704,44:A=46:POKE
53278,255:GOTO 34
BN 2000 POSITION 0,0:? #6;"DDDDDDDDDDDDDD
DDDD":POSITION 0,1:? #6;"DDDDDDDDTHIE
FDDDDDDDD"
WI 2010 POSITION 0,21:? #6;"DDDDBYDMMXDLAN
GERTDD":POSITION 0,22:? #6;"DDDDDDDDDD
DDDDDDDDDD"
HV 2020 DATA 121,243,90,217,108,30,102,20
4,60,121,243,60,193,173,90,193,173,60
IW 2030 RESTORE 2020
LI 2040 FOR S=1 TO 6:READ A,B,C:SOUND 0,A
,10,12:SOUND 1,B,10,12:FOR Z=1 TO C:NE
XT Z:NEXT S
SN 2050 FOR Z=12 TO 0 STEP -0.08:SOUND 0,
193,10,Z:SOUND 1,173,10,Z:IF PEEK(5327
9)=6 THEN RETURN
NE 2055 NEXT Z
CC 2056 POSITION 0,21:? #6;"DDDDDHITDSTAR
TDDDDDD"
YN 2060 IF PEEK(53279)=6 THEN RETURN
NR 2065 POKE 77,0
QV 2070 GOTO 2060
KE 2500 POSITION NN,MM:? #6;" " :EN=EN+500
:SC=SC+500:FOR Z=1 TO 8:SOUND 0,RND(0)
*200+10,10,10:FOR W=1 TO 25:NEXT W
DZ 2510 NEXT Z:SOUND 0,0,0,0:GOTO 10
QA 3000 DATA 0,0,66,36,0,36,66,0,0,0
DC 3005 EN=1000
IT 3015 RESTORE 3000
NF 3020 FOR I=START+580+0 TO START+588+0:
READ X:POKE I,X:NEXT I:SOUND 1,0,0,0:5
OUND 2,0,0,0:SOUND 3,0,0,0
CA 3030 FOR Z=1 TO 25:SOUND 0,100,10,10:N
EXT Z:SOUND 0,0,0,0:FOR Z=1 TO 100:NEX
T Z
GE 3040 SH=SH-1:IF SH=0 THEN 3060
EY 3050 POKE 53278,255:POSITION 1+5H,21:?
#6;"DD":SOUND 0,200,12,15:FOR Z=1 TO
10:NEXT Z:SOUND 0,0,0,0:GOSUB LI
XG 3055 GOTO 1279
KG 3060 POSITION 1,0:? #6;"!#%&'()*!$%#
^!#?":POSITION 1,9:? #6;"*GAMEDTERMINA
TION."
OP 3065 POSITION 1,10:? #6;">&'()'&(')
&'('e":POSITION 0,7:? #6;"
"
SB 3066 POSITION 0,11:? #6;"
"
FX 3070 FOR Z=50 TO 250 STEP 2:SOUND 0,Z,
10,5:SOUND 1,Z-1,10,10:IF PEEK(53279)=
6 THEN POKE 53248,10:RUN
XB 3080 NEXT Z:GOTO 3070
HG 5000 FOR Z=200 TO 30 STEP -1:SOUND 0,Z
,10,10:SOUND 1,Z,10,10:NEXT Z:SC=SC+10
00:POSITION N,M:? #6;" "
NW 5010 SOUND 0,0,0,0:SOUND 1,0,0,0:RETUR
N
MQ 6000 IF LI>540 THEN LI=500:RO=1:GR=GR+
0.5
PL 6002 FOR R=0 TO EN STEP 5:SOUND 0,100,
10,10:SC=SC+5:POSITION 13,21:? #6;SC:5
OUND 0,0,0,0:NEXT R
WK 6010 FOR Z=0 TO 22:POSITION 0,Z:? #6;"
":NEXT Z:RETURN
JT 7000 RO=1:LI=500:DIM A$(20):SH=3:EN=10
00
NJ 7010 GOTO 1100

```

End Program Typing Agony

Forever!

Instant Relief!

Antic Magazine + Disk Subscription
Only \$99.95 for 12 issues.
 See Subscription Insert for details.

ZURK

Article on page 48.

LISTING 1

```

YK 5 REM ZURK
WT 6 REM BY MICHAEL KRUEGER
KH 7 REM AND JOHN SETTLES
QP 8 REM ANTIC MAGAZINE
OB 10 DIM C1(1),C2(1),J(15):GOSUB 5000:GO
SUB 10000
TQ 15 FG=2000:RD=1:L=1:SP=50:RN=1:SCR=0:G
Y=4:OB=0:CL=0:GOSUB 5050:GOSUB 700
YG 20 POKE P1,C1(A1):FOR T=1 TO 5P:NEXT T
:GOSUB 100:IF P1=P2 THEN 1000
HQ 22 IF STRIG(0)=0 AND ST=0 THEN 50
HF 25 S=STICK(0):IF S=15 THEN FOR T=1 TO
5P:NEXT T:GOTO 20
MM 30 AD=J(5):P1=P1+AD:IF PEEK(P1)=1 OR P
EEK(P1)=12 THEN GOSUB 90:IF ST=0 THEN
350
IO 35 IF PEEK(P1)>12 THEN 1000
SW 37 IF P1>5C+219 THEN POKE OP1,0:POKE P
1,3:GOTO 980
ME 40 A1= NOT (A1):POKE OP1,0:OP1=P1:GOTO
20
NA 50 Q=0:MP=P1:OM=MP+AD:IF PEEK(OM)<>131
AND PEEK(OM)<>132 AND PEEK(OM)<>0 THE
N 25
XQ 55 IF PEEK(OM)=131 OR PEEK(OM)=132 THE
N 500
JZ 60 MP=MP+AD:IF NOT (PEEK(MP)) THEN PO
KE OM,0:POKE MP,7:OM=MP:SOUND 0,0,0,15
:Q=Q+1:GOTO 60
FY 65 SOUND 0,0,0,0:Q=0
DT 70 POKE OM,0:IF PEEK(MP)=131 OR PEEK(M
P)=132 THEN 500
KE 80 RN=RN-5.0E-03:GOTO 25
GJ 90 ST=ST-1:POKE OP1,0:POKE P1,3:FOR I=
15 TO 0 STEP -1:SOUND 0,10,8,I:NEXT I:
RETURN
XF 100 IF ST>0 THEN 300
UR 105 IF RND(0)>0.5 THEN 130
UM 110 IF P2>P1 THEN P2=P2-1:GOTO 150
RY 120 IF P2<P1 THEN P2=P2+1:GOTO 150
MW 130 IF P2>P1 THEN P2=P2-20:GOTO 150
IX 140 IF P2<P1 THEN P2=P2+20
XN 150 A2= NOT (A2)
IX 160 IF PEEK(P2)>4 THEN P2=OP2:RETURN
HT 170 POKE OP2,0:POKE P2,C2(A2):OP2=P2
DG 180 IF ABS(P1-P2)>20 THEN RETURN
BQ 185 IF RND(0)<RN THEN RETURN
ZT 190 Q=0:MP=P2:D=-1:IF P2<P1 THEN D=+1
MN 195 OM=MP+D:IF PEEK(OM)<>0 THEN RETURN
CG 200 MP=MP+D:IF NOT (PEEK(MP)) THEN PO
KE OM,0:POKE MP,135:OM=MP:SOUND 0,0,0,
15:Q=Q+1:GOTO 200
YP 210 SOUND 0,0,0,0:Q=0
AO 220 POKE OM,0:IF PEEK(MP)=3 OR PEEK(MP
)=4 THEN 1000
ZE 230 RETURN
HS 300 BN=BN-10:IF BN<0 THEN POP :GOTO 10
00
WM 310 SOUND 1,5,0,BN:POSITION 12,0:? #6;
BN;"":;RETURN
BH 350 POKE OP1,0:POKE P1,3:POSITION 6,0:
? #6;"SCORE":;SOUND 1,0,0,0
BU 360 IF BN>0 THEN SOUND 0,10,8,15:SCR=5
CR+5:BN=BN-5:POSITION 12,0:? #6;SCR:50
UND 0,0,0,0:GOTO 360
DX 361 IF L=4 THEN 960
JH 362 CL=CL+1:IF CL=INT(L)-1 THEN CL=0:G
OSUB 900:GOTO 20
UE 364 FOR I=0 TO 15 STEP 0.5:SETCOLOR 4,
0,I:NEXT I
PO 365 FOR I=15 TO 0 STEP -0.5:SETCOLOR 4,
0,I:NEXT I:SETCOLOR 4,9,4
PA 370 POKE P1,3:M=P1-20:OM=M:ST=4
PM 380 IF PEEK(M)<>0 THEN ST=ST-1:GOTO 38
5
YS 382 IF PEEK(M)=0 THEN POKE OM,0:POKE M
,12:OM=M:M=M-20:SOUND 0,M,8,15:GOTO 38
2
HI 385 M=P1+1:OM=M
RA 390 IF PEEK(M)<>0 THEN ST=ST-1:GOTO 39
5
XV 392 IF PEEK(M)=0 THEN POKE OM,0:POKE M
,12:OM=M:M=M+1:SOUND 0,M,8,15:GOTO 392
PQ 395 M=P1+20:OM=M
EQ 400 IF PEEK(M)<>0 THEN ST=ST-1:GOTO 40
5
ZS 402 IF PEEK(M)=0 THEN POKE OM,0:POKE M
,12:OM=M:M=M+20:SOUND 0,M,8,15:GOTO 40
2
HL 405 M=P1-1:OM=M
GE 410 IF PEEK(M)<>0 THEN ST=ST-1:GOTO 41
5
GY 412 IF PEEK(M)=0 THEN POKE OM,0:POKE M
,12:OM=M:M=M-1:SOUND 0,M,8,15:GOTO 412
VY 415 SOUND 0,0,0,0:POSITION 6,0:? #6;"B
ONUS":POSITION 12,0:? #6;"":;BN=
ST*150:OP1=P1:GOTO 20
VS 500 FOR I=7 TO 0 STEP -0.1:POKE 710,14
:SOUND 0,150,10,15:FOR T=1 TO I:NEXT T
:SOUND 0,0,0,0:POKE 710,148
HP 510 NEXT I:POKE P2,207
BN 511 IF L=4 THEN 930
QT 512 IF L=1 THEN SCR=SCR+INT(L*100):GOS
UB 900:GOTO 20
RB 513 ST=1:BN=500:POKE 710,0
HK 515 POSITION 6,0:? #6;"BONUS":POSITION
12,0:? #6;"":;
RF 517 R=5C+INT(RND(0)*240):IF PEEK(R)<>0
THEN 517
TA 520 POKE R,1:GOTO 20
QX 700 POSITION 1,0:? #6;"":;IF GY-1<=
0 THEN RETURN
WN 710 FOR I=1 TO GY-1:POSITION I,0:? #6;
"":;NEXT I:RETURN
WG 800 GRAPHICS 2+16:? #6:? #6:? #6;"ATTI
ENTION PLEASE!":? #6
AM 810 ? #6;"YOU HAVE COMPLETED"
BZ 815 ? #6;"THE ZURKIAN OLYMPIC"
DB 820 ? #6;"LASERFIGHTING EVENT"
RR 825 ? #6;"SUCCESSFULLY, BUT"
PX 830 ? #6;"THERE IS ONE SMALL"
NW 835 ? #6;"PROBLEM..."
EV 840 FOR I=1 TO 5:FOR J=0 TO 15 STEP 0.
1:POKE 708,J:NEXT J:NEXT I
MJ 845 GRAPHICS 2+16:? #6:? #6:? #6;
"THE JUDGES CONSUMED"
WQ 850 ? #6;"A VERY LARGE AMOUNT"
ZO 855 ? #6;"OF ZURKIAN VODKA &"
X5 860 ? #6;"ARE UNFIT TO RATE"
NM 865 ? #6;"YOU PROPERLY..."
FB 870 FOR I=1 TO 5:FOR J=0 TO 15 STEP 0.

```

continued on next page

KEYBOARD COMMANDER

One-key [control] [shift] commands

by PAUL DRIVER

One-handed operation of keyboard commands that normally require both hands. An aid to handicapped programmers and a useful convenience for anybody! The short BASIC program works on all Atari computers of any memory size. Versions for either cassette or disk are provided, as well as the assembly language source code.

Antic Disk Subscribers ENTER "D:KEYCOMM.D.LST" and follow the directions in the article.

Keyboard Commander uses Atari console keys to toggle simulated [SHIFT] and [CONTROL] key locks. I wrote it in response to the November, 1984 Antic I/O letter requesting help for disabled programmers who have trouble operating two-key commands such as cursor movements.

As I was testing this program, I found that it is very convenient for ANY Atari user. Now I personally use Keyboard Commander just about any time I'm programming in BASIC, assembly language, or ACTION!

GETTING STARTED

CASSETTE USERS: Type in Listings 2 and 3 together. Check them with TYPO II and SAVE. When you RUN this program it will prompt you to place a blank cassette into your

recorder (make certain it is wound past the leader) and press [RETURN]. When you have done so the program will write a bootable file onto the cassette.

To use the cassette: Rewind the cassette to the same point where you started recording the information, and power up the computer while pressing down [START]. When you hear the buzzer, press [RETURN].

DISK USERS: Type in Listings 1 and 3 together. Check them with TYPO II and SAVE a backup. When you RUN the program you will be asked to insert a disk. Press [RETURN] and an AUTORUN.SYS file will be written to disk. (NOTE: Any existing AUTORUN.SYS file will be overwritten by this file.) Now when you boot that disk, the program will be installed.

Listing 4 contains the assembly language source code for Keyboard Commander. You will notice that the program uses Page Six. If you are an assembly language programmer you may wish to type in this listing and change the origin to avoid using Page Six.

LOCKING THE KEYS

The [OPTION] key now toggles the [CONTROL] lock. The [SELECT] key toggles the [SHIFT] lock. Pressing [OPTION] while the [SHIFT] lock is

toggled on allows ACTION! programmers to call up the special editor functions.

The screen border changes color to aid you in keeping track of the current locking mode:

RED	SHIFT LOCK	(SELECT)
BLUE	CONTROL LOCK	(OPTION)
GREEN	BOTH LOCKS	

It is very important that you keep track of active modes by watching the border color. If you are in [SHIFT] or [CONTROL] lock and press the [<] key, the screen will be cleared.

HOW IT WORKS


Keyboard Commander is actually a machine language routine that executes during every vertical blank period—60 times per second. Keyboard Commander monitors the console keys and toggles the value in LOCK for the border color. Then it substitutes a new keyboard interrupt routine which ANDs the value in LOCK with the value received from the keyboard hardware.

Paul Driver is an animation technician at Disney World in Florida. He grew up in the San Francisco Bay Area and got his Atari 800 at Christmas, 1979.



Listing on page 61

Always the Lowest Prices on the Finest Quality at... COMPUTER CREATIONS

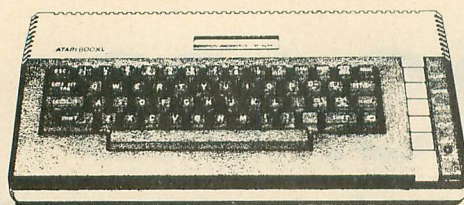

**OKIMATE
10 COLOR PRINTER**
\$209⁹⁵
With Atari Plug 'N' Print Kit!!

ATARI HARDWARE

Atari 800XL™ Home Computer (64K RAM)	Call
Atari 410 Recorder (Special)	For
Atari 1010™ Program Recorder	Updated
Atari 1020™ 40-Column Color Printer/Plotter	Prices
Atari 1025™ 80-Column Printer	On
Atari 1027™ Letter Quality Printer	New
**Atari 1030™ Direct Connect Modem	Model
Atari 1050™ Disk Drive	Atari
* CX77 Atari Touch Tablet™	Computers
Atari Light Pen	

*Screen Dump Program **FREE!!** with purchase of CX77
ET Upload/Download Program **FREE!!

DISK DRIVES

Indus GT (Free Software)	CALL
Astra 2001	FOR
ATR-8000 64K	UPDATED
Happy Enhancement for Atari 810 and 1050 Drives	PRICES
Atari B.I. 80 Column Display Adapter for XL's	

SUPER SOFTWARE PRICES

Atari • Batteries included
Broderbund
Electronic Arts
EPYX
CBS
American Educational
Infocom
Synapse
Spinnaker
OSS
SSI
LJK
Others

CALL
FOR
CURRENT
PRICES

DISKETTE/CARTRIDGE/ CASSETTE FILES

Flip 'N' File 10	3.95
Flip 'N' File 15	6.95
Flip 'N' File/The Original	16.95
Disk Bank	3.99
Colored Library Case	2.99
Disk Bank/5 (holds 50)	12.99
Power Strip (6 outlet)	16.95
Lineguard Spike Suppressor	13.99
Disk Drive Cleaning Kit	11.99
Ram Rod XL with Omniview for 800XL	99.95
Omniview for 800XL	48.95

AUTHORIZED SERVICE CENTER

ATARI
STAR MICRONICS (GEMINI)
Call for prices and services.

GENERIC DISKS AT FANTASTIC PRICES!!

GENERIC DISKS AS LOW AS 94¢ ea.
Generic 100% Defect-Free/Guaranteed.

Includes sleeves, labels, write protect tabs, reinforced hub rings, lifetime warranty. (2 boxes minimum)

		SS/SD	SS/DD	DS/DD
DISKETTES	2 boxes	11.99	13.99	15.99
(2 bx. minimum)	3-9 boxes	10.50	12.50	14.50
	10+ boxes	9.40	11.49	13.99

★ ★ DEALER INQUIRIES INVITED ★ ★

STAR MICRONICS PRINTERS

SG-10 (80 Column)	
SG-15 (136 Column)	CALL
SD-10 (80 Column)	FOR
SR-10 (80 Column)	PRICES
SR-15 (136 Column)	
POWERTYPE Daisywheel	

EPSON PRINTERS

EPSON RX-80+ (80 Column)	249.00
EPSON RX-80+ FT (80 Column)	319.00
EPSON FX-80+ (80 Column)	429.00
EPSON RX 100+ (135 Column)	419.00
OKIDATA 92P	440.00

Printer Interface Cables

MPP-Microprint	49.95
MPP-1150 Parallel Printer Interface	59.95
Microbits Microstuffer	109.95

Printer Ribbons

GEMINI Printers (Black/Blue/Red/Purple)	3.00
EPSON Printers	6.95

RAM (Memory) BOARDS

MICROBITS 64K (600XL) Expansion	89.95
---------------------------------------	-------

MONITORS (Cable Included)

SANYO 12" Green Screen	84.95
SANYO 12" Amber Screen	89.95
SANYO Color Screen	229.95
SANYO 9" Green Screen	69.95

MODEMS

MPP-1000E Modem	114.95
SIGNALMAN Mark XII Modem with R-Verter	299.95
Mark X with R-Verter	299.95

To order call TOLL FREE
1-800-824-7506

ORDER LINE ONLY

COMPUTER CREATIONS, Inc.

P.O. Bo 292467 - Dayton, Ohio 45429

For information call: (513) 294-2002 (Or to order in Ohio)



Order Lines Open 8:30 a.m. to 8:00 p.m. Mon.-Fri.; 10 a.m. to 4:00 p.m. Sat. (Eastern Standard Time). Minimum \$10 per order. C.O.D. (add \$2.50). All prices are subject to change without notice. Call toll free number to verify prices and availability of product. Actual freight will be charged on all hardware. Software and accessories add \$4.00 shipping and handling in Continental United States. Actual freight will be charged outside U.S. to include Canada, Alaska, Hawaii, Puerto Rico. Ohio residents add 6% sales tax. NO CREDITS! Return must have authorization number.

PARALLEL BUS REVEALED

Part III: Building the serial i/o board

by EARL RICE

In Part Three of this important four-part series, we're ready to build a serial I/O board to take advantage of the 100,000 bytes per second data transfer speed of the Parallel Bus Interface on the Atari XL computers.

In the first two parts of this series, we learned the basic concepts of the Atari Parallel Bus Interface. This month, we'll start the actual design of a serial I/O device for the PBI. We'll choose our devices and set up the logic to allow the computer to talk to the 2K ROM or the USART that we'll use for I/O. Next month, we'll design address decoders and put software into the ROM to make things work.

Figure 1 is a block diagram of the devices we'll work with this month. Notice that the signals coming into the select logic are the same ones we invented on our block diagram last month. The exception is RST which comes directly from the PBI connector. The 2K ROM is a 2716, available from almost any surplus house. Be sure to get the 350ns version or it will be too slow for your computer.

The USART and Baud Rate Generator are from Radio Shack. See the parts list for catalog numbers. I picked this USART because it is readily available. It is also simple to design with because it has only four registers

to deal with, and all are brought out to IC pins. That means we can hard-wire some functions and save writing unnecessary software. Next month we'll explain how you can make the circuit more programmable if you prefer to.

For this example, however, we'll hard-wire the control register to give us 300 baud, 7 data bits, no stop bits and no parity. *Figure 3* is a description of USART pin functions and has the information you need to change the data format. *Figure 4* and its associated table show how to change baud rate. Note that the Baud Rate Generator has to run at 16 times the baud rate you want from the USART.

The select logic bears some discussion. Because PBI timing requirements are tight, we need to use fast logic chips to be sure things work. To make matters worse, the PBI can electrically drive only one low power TTL load. When we decode addresses, we'll either need to tie two gate inputs to some lines and overload them, or put a low power buffer on the line and add an extra gate delay to our circuit. Neither alternative is very attractive.

Fortunately, there is a logic family available that combines the loading characteristics of CMOS with the speed of Schottky TTL. This combination of high speed with virtually no DC load on the PBI lines is just what

we are looking for. The logic family is the 74HCTXX series. These are the parts to use here. They are exactly function and pin compatible with TTL.

Be sure to get 74HCT parts and not 74HC parts. The HCT series is a little scarce on the hobby market, but they are available. I got mine at JDR Microdevices in San Jose, California.

Figure 2 is a schematic diagram of our serial I/O device. Notice that the address lines to the 2716 ROM are left off. This is to avoid clutter. We'll put them in next month when we do address decoding. IC's 4 and 5, the NAND and NOR gates, are the select logic.

The 2K ROM is selected when the signal from the DEVICE ENABLE LATCH is LOW AND D8XX-DFXX is LOW. Follow the path through the two NOR gates. You'll notice that the second one is used as an inverter. LOWs at both pins 4 and 6 produce a LOW at pin 13, giving CHIP SELECT (CS) to the ROM.

This doesn't allow the ROM to be read, however, because its POWER DOWN (PD) line has to be brought LOW to enable the ROM outputs. The R/W signal does that every READ cycle. When it brings pin 9 of IC-4 HI, pin 10 goes LOW, enabling the ROM outputs. When both CS and PD are LOW, the ROM is on the bus.

continued on next page


We use R/W for the PD signal because its state is set at the beginning of the 6502 machine cycle, and the PD input takes about 250ns to work. If we waited for address decoding, a slow ROM might not come on quickly enough. CS operates in less than 30ns, so there's plenty of time available to wait for decoding and device enable to happen.

The USART is set up to operate as a single read or write register. Any address from \$D100 to \$D1FF will enable the USART. This wouldn't do at all if we wanted to program its control functions or read its status register. But we've hard-wired those functions for our example, so it really doesn't matter. Besides, it saves parts cost.

Next month we'll deal with embellishments. For now, writing to any address in the \$D1XX range puts a character into the transmit register and the USART will send it. Reading any address in that range reads the last character received by the USART. The DS1-DS8 pins go to the transmit register, and the RD1-RD8 pins go to the receive register. We've wired them together and connected them to the data bus so the computer can write and read USART data.

When the signal from the DEVICE ENABLE LATCH is LOW at pin 3 of IC-4 AND the \$D1XX signal is LOW at pin 3 of IC-4, its output goes HIGH and enables the read-write gates from IC-5. Then if R/W is HIGH at pin 1 of IC-5, pin 3 goes LOW, selecting READ DATA ENABLE (RDE) and placing the USART receive register on the bus to be read.

At the same time, pin 10 of IC-4 brings pin 12 of IC-5 LOW keeping pin 11 HIGH so the DATA STROBE (DS) of the USART is disabled. (Why isn't the ROM selected too? Because pin 13 of IC-4 is HIGH.) If R/W were LOW, pin 1 of IC-5 would be LOW and RDE would be disabled while pin 12 of IC-5 would be HIGH and DS would be enabled.

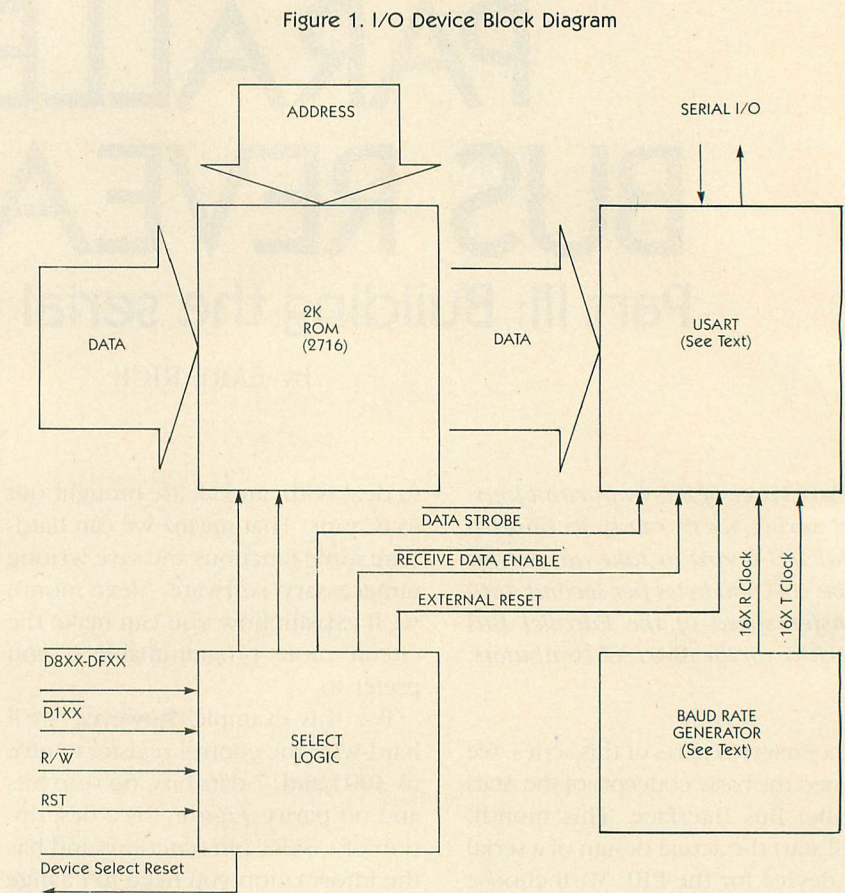

So that's how the select logic works. The only new signal we have is RST which comes from the PBI bus to reset the USART whenever the computer is reset. We send the buffered signal back out as DEVICE RESET (DRST) to reset the device enable latch. We'll see how that works in the final article.

In the meantime, you might want to go about scrounging parts. The circuits can be built using wire-wrap boards if you want. I prototyped on a perforated bread board and it worked fine. Leave room for another half dozen 14 pin gate IC's, a 50 pin ribbon cable header, a 9 pin D-type connector (for I/O), a 5V power connector, and a little extra for any enhancements you might want.

Next month we'll wrap things up with the address decoding logic, soft-


ware drivers, and some suggestions for your own enhancements. See you then!

Former Atari Engineer Earl Rice was project leader for the planned top-of-the-line 1450XL computer.

PARTS LIST:

IC-1 Baud Rate Generator	Radio Shack Cat. No. 276-1795
IC-2 USART	Radio Shack Cat. No. 276-1794
IC-3 EPROM	2716-1 (350ns or faster) 74HCT02
IC-4 Quad 2-input NOR	74HCT00
IC-5 Quad 2-input NAND	74HCT00
CRYSTAL 5.066MHZ	

Figure 2. I/O Device Schematic

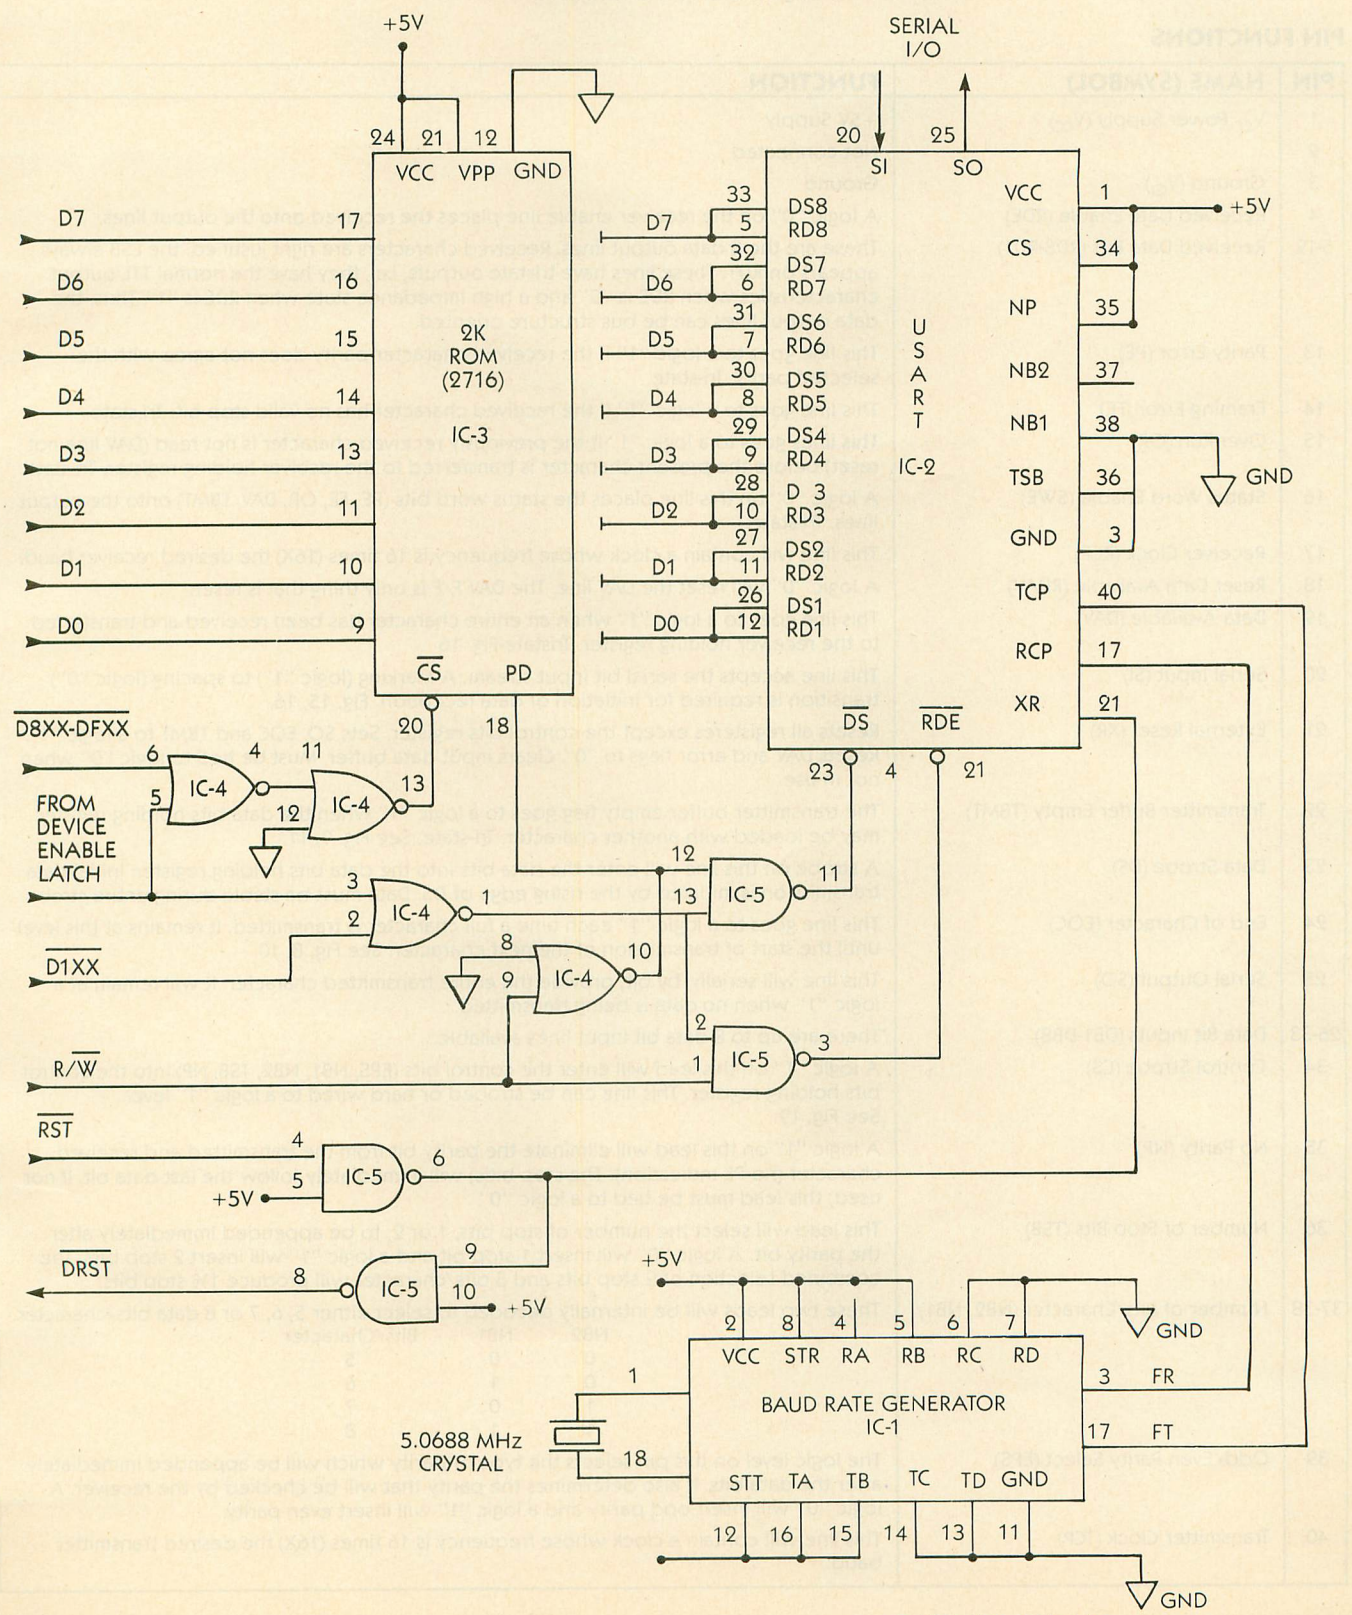

continued on next page


Figure 3. UART Pin Functions

PIN FUNCTIONS

PIN	NAME (SYMBOL)	FUNCTION															
1	V _{CC} Power Supply (V _{CC})	+5V Supply															
2		Not connected															
3	Ground (V _G)	Ground															
4	Received Data Enable (RDE)	A logic "0" on the receiver enable line places the received onto the output lines.															
5-12	Received Data Bits (RD8-RD1)	These are the 8 data output lines. Received characters are right justified: the LSB always appears on RD1. These lines have tristate outputs, i.e., they have the normal TTL output characteristics when RDE is "0" and a high impedance state when RDE is "1". Thus, the data output lines can be bus structure oriented.															
13	Parity Error (PE)	This line goes to a logic "1" if the received character parity does not agree with the selected parity. Tri-state.															
14	Framing Error (FE)	This line goes to a logic "1" if the received character has no valid stop bit. Tri-state.															
15	Over-Run (OR)	This line goes to a logic "1" if the previously received character is not read (DAV line not reset) before the present character is transferred to the receiver holding register. Tri-state.															
16	Status Word Enable (SWE)	A logic "0" on this line places the status word bits (PE, FE, OR, DAV, TBMT) onto the output lines. Tri-state.															
17	Receiver Clock (RCP)	This line will contain a clock whose frequency is 16 times (16X) the desired receiver baud.															
18	Reset Data Available (RDAV)	A logic "0" will reset the DAV line. The DAV F/F is only thing that is reset.															
19	Data Available (DAV)	This line goes to a logic "1" when an entire character has been received and transferred to the receiver holding register. Tristate-Fig. 16															
20	Serial Input (SI)	This line accepts the serial bit input stream. A Marking (logic "1") to spacing (logic "0") transition is required for initiation of data reception. Fig. 15, 16.															
21	External Reset (XR)	Resets all registers except the control bits register. Sets SO, EOC and TBMT to a logic "1". Resets DAV and error flags to "0". Clears input data buffer. Must be tied to logic "0" when not in use.															
22	Transmitter Buffer Empty (TBMT)	The transmitter buffer empty flag goes to a logic "1" when the data bits holding register may be loaded with another character. Tri-state. See Fig. 9, 11.															
23	Data Strobe (DS)	A strobe on this line will enter the data bits into the data bits holding register. Initial data transmission is initiated by the rising edge of DS. Data must be stable during entire strobe.															
24	End of Character (EOC)	This line goes to a logic "1" each time a full character is transmitted. It remains at this level until the start of transmission of the next character. See Fig. 8, 10.															
25	Serial Output (SO)	This line will serially, by bit, provide the entire transmitted character. It will remain at a logic "1" when no data is being transmitted.															
26-33	Data Bit Inputs (DB1-DB8)	There are up to 8 data bit input lines available.															
34	Control Strobe (CS)	A logic "1" on this lead will enter the control bits (EPS, NB1, NB2, TSB, NP) into the control bits holding register. This line can be strobed or hard wired to a logic "1" level. See Fig. 19.															
35	No Parity (NP)	A logic "1" on this lead will eliminate the parity bit from the transmitted and received character (no PE indication). The stop bit(s) will immediately follow the last data bit. If not used, this lead must be tied to a logic "0".															
36	Number of Stop Bits (TSB)	This lead will select the number of stop bits, 1 or 2, to be appended immediately after the parity bit. A logic "0" will insert 1 stop bit and a logic "1" will insert 2 stop bits. The combined selection of 2 stop bits and 5 bits/character will produce 1½ stop bits.															
37-38	Number of Bits/Character (NB2, NB1)	These two leads will be internally decoded to select either 5, 6, 7 or 8 data bits/character. <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>NB2</th> <th>NB1</th> <th>Bits/Character</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>5</td> </tr> <tr> <td>0</td> <td>1</td> <td>6</td> </tr> <tr> <td>1</td> <td>0</td> <td>7</td> </tr> <tr> <td>1</td> <td>1</td> <td>8</td> </tr> </tbody> </table>	NB2	NB1	Bits/Character	0	0	5	0	1	6	1	0	7	1	1	8
NB2	NB1	Bits/Character															
0	0	5															
0	1	6															
1	0	7															
1	1	8															
39	Odd/Even Parity Select (EPS)	The logic level on this pin selects the type of parity which will be appended immediately after the data bits. It also determines the parity that will be checked by the receiver. A logic "0" will insert odd parity and a logic "1" will insert even parity.															
40	Transmitter Clock (TCP)	This line will contain a clock whose frequency is 16 times (16X) the desired transmitter baud.															

continued on page 76

SPARE PARTS FOR YOUR ATARI

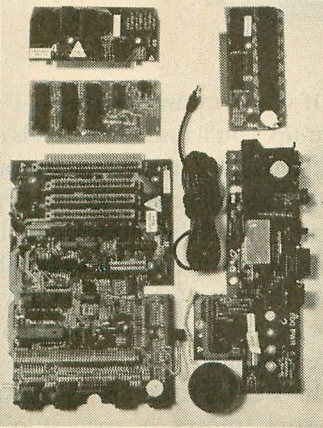


**New
Spare Parts
For Atari
800/400/810**

Replacement Printed Circuit Boards (PCB) w/parts
 800 Main \$30 400 Main \$20 810 side \$50
 800 Power \$5 400 Power \$4 810 side w/DS...\$75
 CPU w/GTIA..\$20 16K RAM \$25 810 Analog ... \$20
 10K OS \$15 810 Power \$25
 Hard to find Integrated Circuits \$5. each
 On CPU: GTIA, ANTIC, CTIA, CPU 6502, CPU 6511
 On 10K OS: Math ROM 399B, OS ROMs 499B & 599B
 On 800/400 Main: Pokey, 6520 PIA
 ON 810 & 850: MPU 6507, PIA 6532, RAM 6810, ROM C
 Power Paks 800/810 \$20 ea 800 XL \$30 ea
 Limited quantity used 800 cases & cast shields \$40 ea

B&C **computervisions** (408) 554-0666

3400 El Camino Real, #1, Santa Clara, CA 95051
 Hours: Tuesday-Friday 10am-7pm/Sat. 10am-5pm
 Terms: UPS Shipments free within USA for orders over \$50. Add
 \$5 if under \$50. COD or prepaid. Calif. Res. add 6½% sales tax.

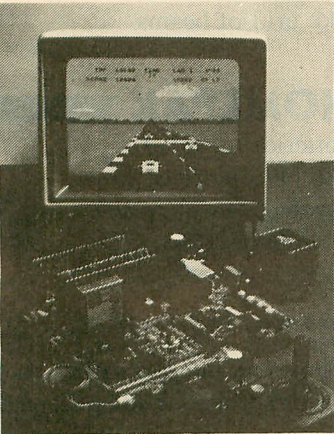

**800 PCB Sets
Main, CPU, 10K OS,
Power & RAM \$75
Less RAM chips \$55**

810 PCB Set w/side, DS, Power, Analog \$100
 810 Drive Mechanisms Tandon or MPI \$100
 Anti Static work pad 18in x 24in \$13
 Field Service Manuals 800/400, 800XL or 810 \$25 ea
 For 1050 or 1200XL \$20 ea For 410 or 835 \$15. ea
 Diagnostic Cartridges Computer or Disk \$25 ea
 Happy Upgrades, 800, 800XL, 810, 1050, 1030 \$CALL
 Books, Modems, Monitors, Printers, Joysticks \$CALL
 Adventure International Gold Series \$40.
 Software by SSI, OSS, Synapse, LJK, Atari ETC.
 Atari 800/400 Technical Reference Notes \$20.
 Pilot, Basic, Microsoft II, Assembler Manuals \$5 ea

SPARE PARTS FOR YOUR ATARI

SPECIAL EDITION DISK DRIVES

MADE FROM
ATARI® 810 BOARDS AND TANDON® MECHANISMS

- HAPPY® COMPATIBLE
- 100% SOFTWARE COMPATIBLE
- 120 DAY WARRANTY
- MOST DURABLE & SERVICEABLE



\$229 WITH IO CABLE
AND POWER SUPPLY

\$369 WITH HAPPY
INSTALLED

CALL TO LEARN THE HIDDEN POWERS
OF THE HAPPY BOARD

Disks from \$1 each
 Timewise® \$ 5
 Game Grab Bag..... 5 games \$12.95
 Cassette Software Grab Bag 10 for \$5
 Complete Spanish Lesson..... \$10
 LJK® LETTER PERFECT or DATA PERFECT... \$49 each

800 COMPUTER BOARDS

Complete & Tested
 ROM \$15 CPU \$15 800 MOTHER \$15
 PWR SUPPLY 5 — ALL 4 \$35

DISK DRIVE PARTS

Complete & Tested
 ANALOG BOARD \$10 REAR BOARD \$25
 SIDE BOARD \$65 MECHANISMS \$65

EVERYTHING FOR THE ATARI
 DEALERS & SERVICE CENTERS WELCOME!

SAN JOSE COMPUTER

1844 ALMADEN ROAD UNIT E
 SAN JOSE, CA 95125

(408) 723-2025

product reviews

CUTTHROATS

Infocom
55 Wheeler Street
Cambridge, MA 02138
(617) 492-1031
\$34.95, 48K—disk

Reviewed by Michael Ciruolo and Jack Powell

You're about to get yourself into very deep trouble, says the **Cutthroats** packaging. It's true! The latest in Infocom's True Tales of Adventure series will trouble serious fans, due to several seemingly illogical and arbitrary key puzzles.

Set on Hardscrabble Island, **Cutthroats** makes you the murky port's top diver and local shipwreck expert.

A note offering adventure is slipped under your door. And as you are drawn into the adventure, you meet some real charmers—Pete the Rat, Weasel, Johnny Red. You'll need to learn how to deal with these locals. Some will kill you, some hold the key to sunken treasure and winning the game with 250 points.

There are four shipwrecks offshore and you must decide which to salvage. The game has more than one major branch and solution.

Cutthroats comes with Infocom's usual excellent packaging, including a hilarious "True Tales of Adventure Magazine", a tide chart, the "Hardscrabble Island Historical Society's Book of Shipwrecks" and so on.

The trouble is that **Cutthroats** is very time dependent and does not allow extensive exploring. You must be at certain places at exact times or you will forever wander the island. You must waste time waiting for meetings and discover secret meetings.


The rigid story development made us feel as though we were being overly manipulated. There was little illusion of spontaneity.

There are plenty of puzzles, but

only some are clever and appropriate to the story. Unfortunately, other puzzles are obscure, illogical and nearly clueless. Be prepared to mail away for the official invisible ink cluebook to this game.

Even when not up to the company's highest standard, Infocom text adventures are way ahead of the competition. Still, we frankly expected better from Michael Berlyn, author of the superb **Infidel**.

DREADNAUGHT FACTOR, BEAMRIDER

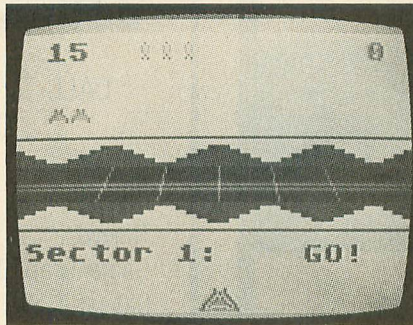

Beamrider

Activision, Inc.
2350 Bayshore Frontage Road
Mountain View, CA 94043
(415) 960-0410
\$14.99 each (From retailers only)
16K—cartridge

Reviewed by Keith Valenza

Another **Space Invaders** clone? Not quite, although you do have to obliterate alien ships, dodge bombs and laser blasts and so on.

However, if you're a videogamer who still enjoys the thrill of annihilating the alien forces from another galaxy, **The Dreadnaught Factor** is a good bet.

The game features clear, crisp, colorful and detailed graphics. Unlike the originality of many Activision games, however, the overused concept of "kill or be killed" is not creative.

If you do want another X-T shoot-'em-up, you'll find seven levels of play and ten lives. On the screen, you'll see your joystick-controlled hyperfighter flying over the enormous **Dreadnaught** as you attempt to bomb guns and air vents. Only by destroying all the vents can you destroy the **Dreadnaught**.

In **Beamrider**, once again your joystick moves a spaceship figure from side to side as your trigger button fires lasers at alien spacecraft coming down from the top of the screen.

What keeps this overdone format from making the game a total waste of time is the 3-D effect of the beam grid playfield—it produces the same sort of illusion as the checkerboard 3-D backgrounds that have been used effectively in other current games.

If you're a real hand-eye coordination arcade whiz, you probably won't find the game's action too exciting. But as an ordinary mortal, I found my adrenalin going up as the attack saucers came at me along the Tron-like grid of beams.

HOMEPAK

Batteries Included
186 Queen Street West
Toronto, ON M5V 1Z1
(416) 596-1405
\$49.95, 48K-disk

Reviewed by Jerry White

HomePak integrates three programs—word processor, filing manager and telecommunications. Programmed by Russ Wetmore, the author of **Preppie**, it's the friendliest personal productivity software I've ever seen, and an ideal package for serious telecommunications users. (**HomePak** is already used by all CompuServe Atari SIG sysops.)

The package's real gem is **HomeTerm**, which will work with just about any 300 baud or 1200 baud modem currently on the market. It

product reviews

even lets you upload and download with the low-cost Atari 1030 and 835 modems.

HomeTerm's colorful screen has a status line displaying duplex, time, file specs and more. You can use the joystick to control common command sequences, for speed and convenience in cruising through the menus and notes of large bulletin boards. You can set up an unlimited library of automatic log-on macros. The list of HomeTerm's exceptional features just goes on and on . . .

HomeFind uses
natural-language
commands
to search
through three fields.

HomeText is an excellent simple word processor with lots of helpful bells and whistles like pop-up menus and color-coded screens, so you don't need to memorize complex commands.

You can work with files up to 8K long—about 4 pages of text. But it's easy to chain files together for convenient printing.

HomeText supports underlining and boldfacing, and has a document preview display. It comes with printer drivers for many popular printers. And it can print customized form letters with merged data from Homefind files.

HomeFind uses natural-language commands to search through three fields. You don't have to enter your records in a special format. For example, simply type in, "Antic address 524 Second Street San Francisco CA 94107." And later you could look up this information by typing, "What's Antic's address?"

Obviously, HomePak is not a super-powered integrated business package

like Lotus 1-2-3. But HomeFind is fine for maintaining a phone directory and other information to use with HomeTerm telecommunicating. And HomeText is fine for preparing text to upload with HomeTerm. Also, the word processor and the database by themselves are perfectly adequate for most home uses.

HomePak's documentation comes in a spiral-bound hardcover booklet that stands up on your desk like an easel, making the instructions extra easy to read. At \$49.95 for a disk with three high-quality programs, HomePak could well be the year's best Atari software value.

SUPER-TEXT

MUSE Software
347 N. Charles Street
Baltimore, MD 21201
(301) 659-7212
\$99, 48K—disk

Reviewed by Chris Chabris

Super-Text (MUSE) is a living dinosaur converted from an Apple word processor. It requires three separate modes to edit text. In Add mode, you type in text and backspace to delete. To make insertions, enter the Cursor mode, position the cursor, and re-enter the Add mode. There's

Super-Text
is
a living
dinosaur.

also a Change mode involved in typing over text. This clumsy multi-mode structure was abandoned by most programmers years ago.

There are other limitations. Scrolling with the Cursor mode is slow. Super-Text allows only 14K of text, (two-fifths of Letter Perfect's

memory). Super-Text can't be used with double-density disk drives.

At least Super-Text has help screens and allows extensive latitude in creating printer drivers. Documentation is comprehensive and includes a quick-reference card.

WRITERS TOOL

Optimized Systems
Software, Inc.
1221B Kentwood Avenue
San Jose, CA 95129
(408) 446-3099
\$129.95, 48K—disk

Reviewed by Tom Rainbow

Writer's Tool (OSS) is a better word processor than AtariWriter—but it's still not as good as Letter Perfect.

Writer's Tool requires both a disk and an 8K cartridge, it supports double-density disk drives as well as the Amdek three-inch microfloppy. It comes with print drivers for most major printers on the market. And it has a database merge feature.

Unfortunately, Writer's Tool also has several throwbacks to the early days of word processing. Functions like Search-and-Replace and Clear (before and after cursor) require leaving the Edit mode, selecting a main menu option, performing the function, and then returning to Edit mode.

Similar inconvenience is encountered in saving a file. You must hit [OPTION] to get the main menu, select [D] for Diskio functions, choose [S] for save, and discover that the program only saves text after the cursor. If your cursor isn't at the text's start, you'd best go back and put it there.

Writer's Tool also takes up too much memory, leaving about 18K for files. You get 28K (about 4,000 words) with Letter Perfect or AtariWriter. A mere 18K isn't good for much more than writing **Antic** product reviews.



PARALLEL BUS REVEALED

continued from page 72

PIN FUNCTIONS

PIN NO.	SIGNAL	FUNCTION
1	XTAL/EXT1	Input is either one pin of the crystal package or one polarity of the external input.
2	V _{CC}	Positive power supply—normally +5V
3	f _R	This output runs at a frequency selected by the Receiver divisor select data bits.
4-7	R _A , R _B , R _C , R _D	These inputs, as shown in Table 1, select the receiver output frequency, f _R .
8	STR	A high level input strobe loads the receiver data (R _A , R _B , R _C , R _D) into the receiver divisor select register. This input may be strobed or hard-wired to a high level.
9	NC	
10	NC	
11	GND	Ground
12	STT	A high level input strobe loads the transmitter data (T _A , T _B , T _C , T _D) into the transmitter divisor select register. This input may be strobed or hard-wired to a high level.
13-16	T _D , T _C , T _B , T _A	These inputs, as shown in Table 1, select the transmitter output frequency f _T
17	f _T	This output runs at a frequency selected by the Transmitter divisor select data bits.
18	XTAL/EXT2	This input is either the other pin of the crystal package or the other polarity of the external input.

Figure 4.

REFERENCE FREQUENCY=4.915200MHZ

Divisor Select DCBA	Desired Baud Rate	Clock Factor	Desired Frequency (KHz)	Divisor	Actual Baud Rate	Actual Frequency (KHz)	Deviation
0000	50.00	16X	0.80000	6144	50.00	0.800000	0.0000%
0001	75.00	16X	1.20000	4096	75.00	1.200000	0.0000%
0010	110.00	16X	1.76000	2793	109.93	1.758983	0.0100%
0011	134.50	16X	2.15200	2284	134.50	2.152000	0.0000%
0100	150.00	16X	2.40000	2048	150.00	2.400000	0.0000%
0101	300.00	16X	4.80000	1024	300.00	4.800000	0.0000%
0110	600.00	16X	9.60000	512	600.00	9.600000	0.0000%
0111	1200.00	16X	19.20000	256	1200.00	19.200000	0.0000%
1000	1800.00	16X	28.80000	171	1796.49	28.743859	0.1949%
1001	2000.00	16X	32.00000	154	1994.81	31.916883	0.2697%
1010	2400.00	16X	38.40000	128	2400.00	32.000000	0.0000%
1011	3600.00	16X	57.60000	85	3614.11	57.825882	0.3921%
1100	4800.00	16X	76.80000	64	4800.00	76.800000	0.0000%
1101	7200.00	16X	115.20000	43	7144.19	114.306976	0.7751%
1110	9600.00	16X	153.60000	32	9600.00	153.600000	0.0000%
1111	19200.00	16X	307.20000	16	19200.00	307.200000	0.0000%


REFERENCE FREQUENCY=5.068800MHZ

Divisor Select DCBA	Desired Baud Rate	Clock Factor	Desired Frequency (KHz)	Divisor	Actual Baud Rate	Actual Frequency (KHz)	Deviation
0000	50.00	16X	0.80000	6336	50.00	0.800000	0.0000%
0001	75.00	16X	1.20000	4224	75.00	1.200000	0.0000%
0010	110.00	16X	1.76000	2880	110.00	1.760000	0.0000%
0011	134.50	16X	2.15200	2355	134.52	2.152357	0.0166%
0100	150.00	16X	2.40000	2112	150.00	2.400000	0.0000%
0101	300.00	16X	4.80000	1056	300.00	4.800000	0.0000%
0110	600.00	16X	9.60000	528	600.00	9.600000	0.0000%
0111	1200.00	16X	19.20000	264	1200.00	19.200000	0.0000%
1000	1800.00	16X	28.80000	176	1800.00	28.800000	0.0000%
1001	2000.00	16X	32.00000	158	2005.06	32.081013	0.2532%
1010	2400.00	16X	38.40000	132	2400.00	38.400000	0.0000%
1011	3600.00	16X	57.60000	88	3600.00	57.600000	0.0000%
1100	4800.00	16X	76.80000	66	4800.00	76.800000	0.0000%
1101	7200.00	16X	115.20000	44	7200.00	115.200000	0.0000%
1110	9600.00	16X	153.60000	33	9600.00	153.600000	0.0000%
1111	19200.00	16X	307.20000	16	19800.00	316.800000	3.1250%



COMPUTER PALACE

Your **ATARI**® Headquarters!



NEW!

Now use both sides of your diskettes



Simply place the disk against the built in stops and squeeze.

The Quorum **ONLY**
DISK NOTCHER \$14.95



\$49.95
48K Disk

Super Mailer PLUS

New Version 1.5

New! Mail merge utility for Atariwriter, Letter Perfect \$14.95

Much More Than A Mailing List!

Features:

- Lightning Fast Retrieval
- Fast Sorts On Any Field
- Supports Up To 4 Drives
- Single Or Double Density
- Much More...

One of the most versatile data-base programs available.

- Maintain your book library...
- Organize your record collection...
- Index your recipes...
- Categorize your stamp collection...
- Unlimited applications!

Another Winner from Micropose 48K Disk \$31.50



Strap into your ejection seat and get ready for air combat in the electronic cockpit of the \$20,000,000 F-15 STRIKE EAGLE!! This one has it all: after burners, multiple radars, air to air missiles, cannon, 3-D and more. Includes 7 different combat missions, 4 skill levels and an infinite variety of scenarios.



LARRY BIRD
JULIUS ERVING

ELECTRONIC ARTS

JULIUS ERVING/LARRY BIRD GO

ONE-ON-ONE

BY ERIC HAMMOND, LARRY BIRD & JULIUS ERVING

By far the most realistic basketball game around! **\$35.10**


OTHER TITLES:

- | | |
|--------------------------|--------------------|
| Pinball Const. Set | Word Flyer |
| Music Const. Set | D-Bug |
| Archon | Cut & Paste |
| Archon II: Adept | Financial Cookbook |
| 7 Cities of Gold | Hard Hat Mack |
| Realm of Impossibility | Worms |
| Murder on the Zinderneuf | Axis Assassin |

Outsmart your Friends Outwit the Dragon

Join the Quest

Here are just a few of many screens.




THE CHALLENGE

Over 2000 stimulating trivia fact questions will send you scurrying through your personal memory banks. Answer correctly and advance in your quest while adding more gold to your treasure. Fail and you lose ground.



THE ACTION

You may have to face and battle a ferocious dragon. If you prevail, the dragon's cache of gold will be added to your treasure. If you fail, your journey will be slowed when you reach your enemy's.



THE STRATEGY

Each questing party consists of three characters: a Knight, Prince and Page. Each has distinctly different physical characteristics, and all must complete the Quest! You must decide when to send them on to the next challenge.

TRIVIA QUEST

OUTSMART YOUR FRIENDS • OUTWIT THE DRAGON • JOIN THE QUEST

Trivia Quest is a totally new concept in computer games that will challenge your mind, test your arcade skills and call upon your best strategy.

PROGRAM COVERS FOUR DISK SIDES!

Royal Software SOFTWARE FIT FOR A KING!

(Program Covers Four Disk Sides)

A new concept in computer gaming. Intellectual **48K \$39.95** challenge, strategy and arcade action. Each player assumes the role of a lord with a questing party of three characters. Complete the quest, earn the most gold by correctly answering questions and battling the dragon. Win the favor of the king and thus, the game.

- Utility Disk—1000 additional questions plus create your own... \$24.95



The **Ultimate Screen Dump Program**

This powerful and easy-to-use utility will allow you to dump almost any Atari text or graphics screen to your printer (even while the program is running!)

48K Disk \$26.95
For All Computers


From Big Five

MINER 2049er

- 10 Different Screens
- 16K Cartridge
- Spectacular Sound & Graphics

Price \$39.95
OUR PRICE ONLY

\$17.95 * Limited quantities.



SUPER SPECIALS

	Reg /Sale
Shamus	\$30/9.95D
Sea Dragon	\$30/9.95D
Ulysses	\$35/19.95
Match Racer	\$30/9.95DT
Jaw Breaker	\$30/9.95DT
Meteor Storm	\$30/3.95D
Wizard of Wor	\$45/17.95C
Krazy Shootout	\$40/17.95C
Choplifter	\$45/19.95DC
Adventure #10	\$20/9.95DC
Adventure #11	\$20/9.95T
Defender	\$40/17.95C
Eastern Front	\$45/13.95C
Shamus (Not XL)	\$35/17.95D
Rally Speedway	\$50/19.95C
Way-Out	\$30/9.95D
Pathfinder	\$30/9.95D

D: Disk T: Tape C: Cartridge

Magazine Back Issues

Analogue: 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27
Antic: 3/3, 3/4, 3/5, 3/6, 3/7, 3/8
Hi-Res: 1, 2

\$3.00 Each

FREE CATALOG

with any order or send \$1 (refundable with first purchase)

This is the most comprehensive Atari reference catalog available! It contains over 3000 software & hardware listings with illustrations and descriptions!



IF YOU DON'T HAVE OUR CATALOG... YOU'RE MISSING OUT!

ATARI REPAIR PARTS

Joystick PC board	\$ 2.49
Joystick cord	2.95
Joystick inner handle	1.49
13-Pin I/O Plug	9.95
6 ft. I/O Cord	19.95
Printer Cable	29.95
Monitor Cable	14.95

COMPUTER PALACE

OPEN M-F, 9-6 Sat. 10-4 (Pacific Time)

2160 W. 11th Avenue Eugene, Oregon 97402




USE YOUR CREDIT CARD & CALL
Toll Free 1-800-452-8013

★ **ORDERS ONLY, PLEASE** ★

There's never a penalty for using your credit card!

For Information, Call (503) 683-5361

SHIPPING INFO: Minimum \$2.90 Ground, \$4.75 Air. Actual Cost depends on weight. Call (503) 683-5361 for information.
WARRANTY INFO: Everything that we sell is warranted by the manufacturer. If any item purchased from us fails to perform properly when you receive it, call us at (503) 683-5361 so that we can assist you. No returned merchandise accepted without authorization. Defective software will be replaced with another copy of the same program, otherwise, no software is returnable.



10 SS SD DISKETTES

Our high quality Single density!

ONLY \$13.95

Try a box of 150 and save even more! \$150.00

DRIVES—DRIVES—DRIVES

Atari Indus	Rana Percom	Trak Amdek
-------------	-------------	------------

CALL FOR SPECIAL PRICING!

service center

ALABAMA

VIDEO REPAIR CO.
2009 CENTERPOINT RD.
BIRMINGHAM
205-854-5212

RAINBOW CITY SERVICE
CENTER
244 RAINBOW PLAZA
GADSDEN
205-442-6810

C & R ELECTRONICS
704 HOLCOMBE AVE.
MOBILE
205-473-3030

BUSINESS SERVICES
2828 CHESTNUT ST.
MONTGOMERY
205-834-2290

ARIZONA

RICK'S TV & APPLIANCE
1104 E. DEUCE OF CLUBS
SHOW LOW
602-537-7625

CALIFORNIA

D & G COMPUTERS
4156 MANZANITA AVE. #200
CARMICHAEL
916-485-7779

SAN JOSE COMPUTER
1844-E ALMADEN RD.
SAN JOSE
408-723-2025

B & C COMPUTERVERSION
3400 EL CAMINO REAL
SANTA CLARA
408-554-0666

ATCOM COMPUTERS
1421 THOUSAND OAKS BLVD.
THOUSAND OAKS
805-497-1220

AUTHORIZED COMPUTER
SERVICE
951 W. FOOTHILL BLVD.
UPLAND
714-985-2101

TESTEK
7224 VALJEAN AVE.
VAN NUYS
818-786-6890

COMPUTER JUNCTION, INC.
15000 7TH ST. SUITE 214
VICTORVILLE
619-245-3622

COLORADO

AMERICAN TELEVISION
SERVICE CO
1226 W. LITTLETON BLVD.
LITTLETON
303-795-2040

LOOKING GLASS
MICROPRODUCTS
4233 WEST EISENHOWER
LOVELAND
303-669-2681

FLORIDA

R & S ELECTRONICS, INC.
3245 W. MCNAB RD.
FT. LAUDERDALE
305-979-6763

BOURQUE'S ELECTRONIC
SERVICE
180 RICHIEN RD.
FT. WALTON BEACH
904-862-3346

MR. SOFTWARE
101 HOLLYWOOD FASHION
CENTER
HOLLYWOOD
305-981-9090

ENTERTAINMENT SERVICES
ELECT.
811 EDGEWOOD AVE. S.
JACKSONVILLE
904-786-1305

COMPUTER IMAGE,
10061 SUNSET DR.
MIAMI
305-271-1224

COMP-U-PHONE
6160 EDGEWATER DR.
SUITE E.
ORLANDO
305-291-1712

GEORGIA

GOODWIN'S ELECTRONICS
JUNCTION SHOPPING CENTER
ALBANY
912-435-9605

NORMAN'S ELECTRONICS,
INC.
4014 PEACHTREE RD. NE
ATLANTA
404-237-3349

ELECTRONIC SPECIALISTS
1685 EDNA PLACE
MACON
912-742-5628

RADIOS AND
MICROCOMPUTERS INC.
3833A WASHINGTON RD
MARTINEZ
404-863-9071

HARRIS TV
1 E. MONTGOMERY
CROSSROAD
SAVANNAH
912-927-2084

HAWAII

KONA COMPUTER
75-5706 HANAMA PL. #107
KAILUA-KONA
808-329-8574

ILLINOIS

DIGITAL WORLD, INC.
711 ARMY TRAIL RD.
ADDISON
312-543-9000
OMEGA ENTERPRISES
7823 N. 2ND ST.
ROCKFORD
815-282-1477

INDIANA

WRIGHT ELECTRONICS
614 N. MAIN ST.
EVANSVILLE
812-423-2845

CITIZEN'S TV & VIDEO
827 W. GLENPARK AVE.
GRIFFITH
219-924-0047
THE COMPUTER CORNER
7101 BROADWAY
MERRILLVILLE
219-738-3282

KANSAS

MIDWEST APPLIANCE
SERVICE
METCALF SOUTH MALL
OVERLAND PARK
913-341-6688

KENTUCKY

FACTORY ELECTRONICS
2422 PALUMBO DR.
LEXINGTON
606-269-7341
VANOVER TV HOSPITAL
2027 CUMBERLAND AVE.
MIDDLESBORO
606-248-3827

LOUISIANA

COMPUTER ELECTRONICS
1955 DALLAS DR.
BATON ROUGE
504-924-8066

MASSACHUSETTS

CUSTOM ELECTRONICS
238 EXCHANGE ST.
CHICOPEE
413-592-4761
BEACON TV-ELECTRONICS
8 TILESTON ST.
EVERETT
617-389-8600

CONDOR SERVICE
372 SOUTH MAIN ST.
SHARON
617-784-2382

ROCOM, INC.
184 MAIN ST.
WAREHAM
617-295-2542

MARYLAND

NATIONAL BUSINESS &
SECURITY
8639 LOCH RAVEN BLVD.
BALTIMORE
301-665-8870

EDGEWOOD TV & AUDIO
4932 EDGEWOOD RD.
COLLEGE PARK
301-441-9116

CROFTON TV & VIDEO
SERVICE
2217 DEFENSE HWY
CROFTON
301-721-1700

COMPUVISION COMPUTER
CENTER
6445 BURWOOD PL.
GLEN BURNIE
301-850-4055

ADVANCED COMPUTER
SERVICE CO.
287 E. GREEN ST.
WESTMINSTER
301-876-8202

MAINE

AUTOMATIC SERVICES
22 TARGET INDUSTRIAL
CIRCLE
BANGOR
207-942-6769

J. D. ELECTRONICS
385 STEVENS AVE.
PORTLAND
207-775-1411

MICHIGAN

FUTURE DIRECTIONS
1520 N. VAN DYKE
BAD AXE
517-269-7211

THE FAMILY COMPUTER
CENTER
3895 W. 12 MILE RD.
BERKLEY
313-543-0520

CHASE TRANSISTOR SERVICE
521 LEONARD ST. NW
GRAND RAPIDS
616-454-9000

ABL ELECTRONIC SERVICE,
INC.
32 E. 14 MILE ROAD
MADISON HEIGHTS
313-588-6663
SOLID STATE SERVICE
548 SHATTUCK RD.
SAGINAW
517-752-0606

MINNESOTA

PHILIPS COMMUNICATIONS
& TV
748 N. E. HARDING ST.
MINNEAPOLIS
612-378-7200

USER FRIENDLY COMPUTER
8465 PLAZA BLVD.
SPRING LAKE PARK
612-786-8181

MISSOURI

SOUTHLAND ELECTRONICS
22 E. OLIVE DR.
AURORA
417-678-4623

MIDWEST APPLIANCE
SERVICE
METRO NORTH MALL
KANSAS CITY
816-436-7010

COMMUNITY SOUND & VIDEO
1834 S. STEWART
SPRINGFIELD
417-887-3391

A & E ELECTRONICS CORP
2001 BIG BEND BLVD.
ST. LOUIS
314-645-7733

J & S VIDEO VISIONS
1051 WASHINGTON SQUARE
CENTER
WASHINGTON
314-239-2677

MISSISSIPPI

ELECTRONIC SERVICES
2315 25TH AVE
GULFPORT
601-863-3772

NORTH CAROLINA

SOUTHERN PHOTO
TECHNICAL SVCE
2610 SOUTH BLVD.
CHARLOTTE
704-523-0012

NEW JERSEY

DEPENDABLE PARTS, INC.
168 MAIN ST.
CHATHAM
201-635-5888

S R DATA
2141 WOODBRIDGE AVE.
EDISON
201-985-5017

ADVANCED ELECTRONICS
VILLAGE SHOPPING CENTER
RT.206
FLANDERS
201-584-1252

TELSAR ELECTRONIC
SERVICES, INC.
829 STONE RD.
LAUREL SPRINGS
609-783-8500

VIDEO ELECTRONICS
COMPUTER SVC
1418 ROSELLE ST.
LINDEN
201-925-1418

VIDEO CONNECTION OF
SOMERSET
900 EASTON AVE.
SOMERSET
201-545-8733

K & S ELECTRONICS
119 HAMILTON BLVD.
SOUTH PLAINFIELD
201-755-4204

NEW YORK

ISLAND VIDEO COMPUTER
SERVICE
35 MIDDLE COUNTRY RD.
CORAM
515-736-1001

AARDVARK ELECTRONIC
SERVICE
44 CASTLE ST.
GENEVA
315-789-5295

LONG ISLAND COMPUTER
GENERAL
103 ATLANTIC AVE.
LYNBROOK
516-887-1500

ABC ELECTRONICS SERVICE
CO.
392 THURSTON RD.
ROCHESTER
716-328-1840

OHIO

ARJAY MICRO
1385 BETHEL RD.
COLUMBUS
614-459-4219

STATION FUN TV, INC.
206 CLINTON ST.
DEFIANCE
419-782-8545

COMPUTER CREATIONS, INC.
KETTERING
B AND G ELECTRONICS, INC.
15729 MADISON AVE.
LAKEWOOD
216-521-2855

ERIC MARTIN'S, INC.
5485 WARRENSVILLE CENTER
RD.
MAPLE HGTS
216-663-2032

VIDEO COMPUTER WORLD,
INC.
2223 WOODVILLE RD.
OREGON
419-691-7282

DODD CO.
7795 W. RIDGEWOOD DR.
PARMA
216-886-2828

OREGON

NORTHWEST COMPUTER
SUPPORT, INC
10200 S.W. NIMBUS G-1
PORTLAND
503-684-3280

PENNSYLVANIA

KIBLER'S INDEPENDENT TV
526 FALLOWFIELD AVE.
CHARLEROI
412-483-7484

PARK T. MORROW, INC.
627 W. 26TH ST.
ERIE
814-455-7566

DEBUG BYTES COMPUTERS
662 PHILADELPHIA ST.
INDIANA
412-349-7290

GRUSS ELECTRONIC REPAIR
HILLS PLAZA
JOHNSTOWN
814-266-1395

TESCO, INC.
9237 ROOSEVELT BLVD.
PHILADELPHIA
215-677-5000

NATIONAL TELEVISION
SERVICE
5461-63 PENN AVE
PITTSBURGH
412-361-5400

BOYD TV
719 LANCASTER AVE
WAYNE
215-688-3727

service center

RHODE ISLAND

VIDEO ENCOUNTERS
MAINES SHOPPING CENTER
WAKEFIELD
401-783-3460

SOUTH CAROLINA

ELECTRONIC SERVICE CO.
1736 DECKER BLVD
COLUMBIA
803-782-2705
COASTAL TV & APPLIANCE
CO.
603 HWY 501
CONWAY
803-248-2686

SOUTH DAKOTA

TAYLOR AUDIO-VISUAL, INC.
1009 DAKOTA S.
HURON
605-352-3205
HOUSE OF TELEVISION
601 SOUTH DULUTH AVE.
SIOUX FALLS
605-338-9051
TENNESSEE
HI-FI SERVICE CENTER
4608 HIXSON PIKE
CHATTANOOGA
615-877-6781

BILL'S TV, SALES & SERVICE

3843-C DICKERSON RD.
NASHVILLE
615-865-5000

TEXAS

TV CENTER
202 S. WILLIS
ABILENE
915-677-1171
PACIFIC STEREO
525 113TH ST.
ARLINGTON
817-640-3094
LONGS/ENTRONIX
5800 MAPLE AVE.
DALLAS
214-358-3222
COMPUTER HOME, INC.
3548 KNICKERBOCKER
SAN ANGELO
915-944-9795

UTAH

INTERWEST ELECTRONICS
CORP.
4091 SOUTH STATE ST.
SALT LAKE CITY
801-265-5301

VIRGINIA

SALEM COMPUTER CENTER
4034 PLANK RD.
FREDERICK
703-786-8126

VIDEO UNLIMITED SERVICE CENTER

1707 ROUTE 17
GRAFTON
804-898-5318
L & Y ELECTRONICS
13670 JEFFERSON DAVIS
HWY.
WOODBIDGE
703-494-3444

WASHINGTON

ON LINE COMPUTERS PLUS
13710 NE 20TH ST.
BELLEVUE
206-644-2080
BUTLER'S TV & COMPUTER
SERVICE
28717 PACIFIC HWY SOUTH
FEDERAL WAY
206-941-9096
ARTICULATE SYSTEMS
E 9405 SPRAGUE AVE.
SERVICE CTR
SPOKANE
509-922-0255

JOHNSON'S TELEVISION

SERVICE
N 4424 WALL
SPOKANE
509-327-9566

WISCONSIN

AUTHORIZED TV
810 NINTH ST.
GREEN BAY
414-499-4215
DAN'S CITY WIDE TV.
1259 E. JOHNSON ST.
MADISON
608-255-4144
MISTER TV SERVICE
5455 W. BURLEIGH ST.
MILWAUKEE
414-873-2415

WEST VIRGINIA

COMPUTERS PLUS, INC.
2077 CHARLESTON TOWN
CENTER
CHARLESTON
304-342-4848

Service Centers, Retailers, to
get your listing in Antic call
(415)661-3400

Antic welcomes program submissions from readers. Just send us your program and accompanying article, we'll pay you if we publish them.

We prefer to see your listing and text on both paper and disk.

Sending us your program on cassette is also okay. But please put program copies on both sides of the cassette.

Always include a stamped, self-addressed envelope so your materials can be returned.

THE WINDY MONTH OF March!

HARDWARE!

	LIST	NET
RAMROD MMOS.....	\$159.95	CALL
RAMROD XL.....	\$119.95	CALL
OMNIMON.....	\$ 99.95	CALL
SUPER PILL.....	\$ 79.95	CALL
PROTECT./SILENCER.	\$ 49.95	CALL
XL FIX.....	\$ 49.95	CALL
HAPPY 810/1050.....	\$249.95	CALL

SOFTWARE!

MASK OF THE SUN.....	\$39.95	\$28.50
THE SANDS OF EGYPT.	\$29.95	\$23.85
BRUCE LEE.....	\$34.95	\$25.85
SPY HUNTER.....	\$49.95	\$32.50
ARCHON II: ADEPT.....	\$40.00	\$27.50
BLANK BULK(SENT.)..	\$ 5.95	\$ 1.05

ALL THIS AND SO MUCH MORE AT THE C.E.S.
1100 W. LINCOLN AVENUE, ANAHEIM CA 92805
OUT OF STATE CALL: 800-223-2686. IN STATE
CALL: 1-714-635-8621. WE ACCEPT ALL FORMS
OF PAYMENT. WE AT THE CES HAVE ALL THE
SOFTWARE & HARDWARE FOR THE ATARI!!!!!!!
ALWAYS CALL US BEFORE YOU BUY!!! Happy Day
DON'T BLOW AWAY!!!


WINNER
1984 Verbatim Computer
EdGame Challenge!

"Even Mom's Having Fun!"

A Family Game for ages 8 and up which
STIMULATES Conversation!

AUNT PRUNELDA'S INHERITANCE

- *1 to 4 players
- *Any Atari Computer with min. 48K
- *BASIC language
- *Printer optional
- *Disk based
- *Accidentally Educational
- *Accumulate cash to win
- *Trade stocks
- *Play craps in the Casino
- *Sabotage your Opponents
- *Save or invest your funds
- *News stories and player decisions make every game different.



Extensive Documentation includes forms for enhanced play and backgrounds on 25 stocks plus the "CowBones Average."

"What am I going to do with a professional table tennis team?"
"Sorry guys. The Bank of the World just went down the tubes."
"What kind of stock is Tex's Chainsaw Smorgasbords?"

\$27.95

plus \$2.00 shipping

Send check or money order to:

MARKET DIRECTIONS

P.O. Box 702


Janesville, WI 53547

Wisconsin residents add 5% sales tax.

ATARI is a registered trademark of the Atari Corporation.

VERBATIM is a registered trademark of the Verbatim Corporation.

HOW TO TRACK A WOMBAT:

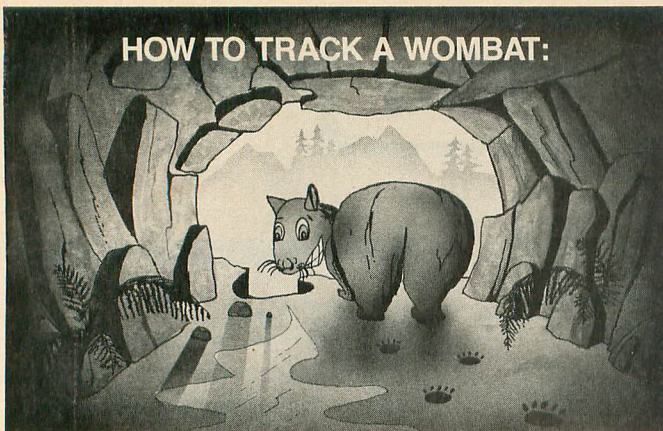

WOMBATS I: A PARODY ADVENTURE

- Buy appropriate wombat tracking gear (snowshoes, swimsuit, flashlight).
- Fly to exotic countrysides (Borneo, Lower Hebrides, Pasaic, N.J.).
- Get Wombat Tracker's License.
- Track Wombat.

OR: You can play WOMBATS I from the safety and security of your keyboard. WOMBATS I is a new kind of adventure game where the action takes place mostly in your mind. WOMBATS I is sophisticated software, sporting 48K of program and 55K of absurd, irreverent text. WOMBATS I spoofs adventure games and life in general; be prepared to examine your assumptions . . . and those of the world around you! To see how you rate, ask for WOMBATS I at your local store, or send \$27.95 (plus \$2.00 shipping and handling) to:

Dynamic Software Design
P.O. Box 8169
Fremont, CA 94537

Check or M.O. accepted. Please allow 3-4 weeks for delivery. Dealer inquires welcome. CA residents add 6.5% sales tax

GET TRACKING!

PARTS/SERVICE FOR ATARI COMPUTERS

ORIGINAL FACTORY PARTS FOR 800/400, 810, 820, 850,
UPGRADE TO GTIA. 48K AND
REV. "B" OPERATING SYSTEM
CUSTOM 810 DISK DRIVES . . . \$215.00

INTEGRATED CIRCUITS FOR 800/400

GTIA Chip . . .
upgrade with instructions . . . \$11.50
10K rev. "B" O.S. Upgrade . . .
3 chip rom set with instructions . . . \$12.50
Pokey Chip . . . C012294 . . . \$8.50
Antic Chip . . . C012296 . . . \$10.00
PIA Chip . . . C014795 . . . \$11.00

MODULES/CIRCUIT BOARDS...complete with IC's

16K Ram Memory Module . . .
CX853 . . . \$24.50
800 10K Rev. "B" O.S. Module . . . \$18.50
800/400 CPU Board with GTIA . . . \$24.50
800 Main Board . . . \$28.50
400 Main Board . . . \$26.50
400 Main Board W/O IC'S . . . \$8.50
800 Power Supply Board . . . \$10.50
810 Data Separator Board . . .
upgrade with instructions . . . \$25.00
810 Side Board W/O Sep. & 1771 . . . \$43.50
810 Rear Power Board . . . \$25.00
810 Analog Board . . . \$16.00

AMERICAN TV

Mail Order Address . . . 15338 Inverness St., San Leandro, CA 94579.
Retail Store . . . 1988 Washington Ave., San Leandro, CA 94577.

Terms: We accept money orders, personal checks or COD. VISA/Mastercard OK on orders over \$25.00. No personal checks on COD.

Shipping: \$4.00 Shipping and handling on orders under \$150.00. Add \$2.00 for COD orders. CA res. include 6-1/2% sales tax. Overseas shipping extra.

Prices subject to change without notice. We reserve the right to limit quantities. Sales limited to stock on hand. AK, HI, FPO-APQ, add \$5.00 on all orders.

Much More! Send SASE for free price list.

Repair and upgrade services available . . . Call. *Atari is a registered trademark of Atari, Inc.

REPLACEMENT/ BACK UP BOARD SETS

800 . . . 0K . . . \$72.50
800 . . . 48K . . . \$125.00
400 . . . 0K . . . \$52.50
810 Board Set . . . \$110.00
810 Mech . . . \$85.00
All Boards Complete With IC's Etc.
Keyboards not included.

Overseas customers . . . ask
for PAL price list.

MISC.

810 Rear Board/Analog Board Upgrade . . .
with 10 pin jumper and instructions . . . \$39.50
Editor Assembler . . . \$29.95
Basic Cartridge W/O Case, Manual . . . \$23.50
Cartridge Circuit Boards . . . \$4.00
Non-Atari Cartridge Boards . . . \$2.00
Non-Atari power transformer . . . \$16.50

PHONE 415-352-3787

ADVERTISERS

ABBY'S HOUSE OF DISCOUNT SOFTWARE	50
ABP	81
ADD-ON SYSTEMS	7
ALLEN MACROWARE	11
AMERICAN TV	79
ANTIC, INC.	see insert
AUGUST PUBLICATIONS	81
AXLON	8
AXLON GAMES	18
BATTERIES INCLUDED	4,BC
COMPUCLUB	20
COMPUTER CREATIONS	68
COMPUTER PALACE	77
COMPUTER SOFTWARE SERVICE	49
CONSUMER ELECTRONICS STORE	80
CONTINENTAL SOFTWARE	40
DESIGN SOFTWARE	81
DYNAMIC SOFTWARE	79
EASTERN HOUSE	41
ELECTRONIC ONE	66
HAPPY COMPUTING	73
INDUS	39
LOTSA BYTES	3
M.A.R.K. ENTERPRISES	81
MARKET DIRECTIONS	80
MICROBITS	IFC
MINDSCAPE	9,13
OKIDATA	29
O.S.S.	IBC
ORIGIN SYSTEMS	17
PROGRAMMERS WORKSHOP	42
SENECOM	41
SOFTWARE DISCOUNTERS OF AMERICA	20
STAR MICRONICS	44,45
SUBLOGIC	47
TINY TEK	81
XEROX EDUCATIONAL PUBLISHING	32
ZOOMSOFT	81

This is provided as a convenience and as a courtesy to advertisers. **ANTIC** does not guarantee accuracy or comprehensiveness.

SHOPPER'S GUIDE

RAM for ATARI*

Tiny Tek, Inc. Memory Boards are fully assembled, tested, and guaranteed.

48K/52K Memory Board	\$79.95
For ATARI* 400 52K Addressable Memory Easy to Install	
32K Memory Board	\$54.95
For ATARI* 400 or 800	
16K Memory Board	\$39.95
For ATARI* 800	
BUILD YOUR OWN MEMORY	
48K/52K Bare Board	\$30.00
32K Bare Board	\$20.00
16K Bare Board	\$10.00
48K/52K Complete Kit	\$70.00
32K Complete Kit	\$45.00
16K Complete Kit	\$30.00

Add \$2 Shipping & Handling
Visa & MasterCard Accepted
*ATARI is a trademark of Atari, Inc.
Dealer Inquiries Welcome

Tiny Tek, Inc.

Route 1, Box 795
Quinlan, TX 75474
214-447-3025

LOGO AIDE



by
BARRY A. HOGLUND
REPRODUCEABLE
\$\$\$AVE\$\$

(LCSI VERSION FOR ATARI COMPUTERS)

PARENTS! STUDENTS! USERS GROUPS!

**A BOOK WRITTEN BY A TEACHER,
FOR TEACHERS, IS NOW AVAILABLE
TO THE PUBLIC.**

LOGO AIDE is directed toward ATARI users with limited experience in LOGO. The content is highly structured and easy to use. Topics such as Initial Primitives, Multiple Turtles, Writing Procedures, Shape Editing, Using Variables, and Project Planning are addressed. Materials include teaching aides, quick reference charts and large graphics. All explanations are well organized, clearly stated and fun!

The author has granted duplication rights for all parts of the book that are used with the purchaser's students or users group.

LOGO AIDE is equally suitable for the K-5 teacher with one computer and limited time. The 6-8 teacher in a lab setting, the in-service teacher or college instructor with computer literacy responsibilities, and Parents, Students, and User Groups.

MAIL CHECK OR MONEY ORDER TO	VISA/M/C #			
AUGUST PUBLICATIONS	EXPIRATION DATE			
P.O. BOX 67	SIGNATURE			
SAN RAFAEL, CA 94915	ADDRESS			
# COPIES	PRICE	6% TAX	SHIPPING	TOTAL
	\$29.99	\$1.80	\$2.96	

zoomsoft

BRITAIN'S LEADING ATARI
SOFTWARE SPECIALIST

	cass	disk
	UK POUNDS	
Bruce Lee	14.95	14.95
Dallas Quest	N/A	14.95
Tigers in the Snow	14.95	14.95
Combat Leader	14.95	14.95
Graphics Art Department	N/A	44.95
Jetboot Jack	9.95	N/A
Encounter	9.95	12.95
Arcade Construction Set	N/A	44.95
F15 Strike Eagle	14.95	14.95
Beach Head	9.95	12.95
Fort Apocalypse	9.95	14.95
Blue Max	9.95	14.95
Blue Thunder	9.95	N/A
Attack of the Mutant Camels	8.95	N/A
Disk Collector	N/A	18.95
The Protect (write to both sides of a disk)		13.95

PLUS 100's more titles available.
Send S.A.E. for FREE catalogue.
Cheques, PO to:-

ZOOMSOFT, 46 Huntsworth Mews,
London, NW1 6DB Tel: 01 723-0562.

Foreign orders please add £1.25 for post.

**YOUR AD
COULD
APPEAR
HERE
CALL**

415 661 3400

DISK BREAKS?

**Fast, Reliable Repair
for Atari 810 & 1050 Disk Drives**

- 3 Day Turnaround
- 90 Day Warranty
- \$85 Flat Rate with Repairable Exchange
- Spare Parts Available

*Dealers—Special Rates Available
Ask about Express Expedite*

MPS

The Disk Drive Specialists
(916) 786-6550

Add \$10 shipping & handling.
Check, MO, Visa, MC

ASSEMBLY LANGUAGE PROGRAMMERS

MUSIC16 music generator

- Source code module.
- 16 bit music.
- Notes electronically tuned.
- 9 Octave range.
- Volume, sustain and decay control.
- Tremolo chords - 2,3, & 4 notes.
- Vertical blank driven.
- Macros to build music files.
- Just .INCLUDE in your programs.

MUSIC16 requires MAC65(R) from Optimized Systems Software for assembly. Disk only.

To order: Check or money order for \$25.00 to:

DESIGN SOFTWARE

P.O. Box 16187 • San Francisco, CA 94116

Add \$2.00 shipping and handling.
CA residents add \$1.50 sales tax.
BART area add \$1.63 sales tax.



INDUS GT

\$279.95


THE BEST DISK DRIVE - THE BEST PRICE

ATARI® 1050 Disc Drive	\$189.95
ATARI® 800XL Computer	\$129.95
ATARI® 600XL Computer	\$79.95
APE FACE Printer Interface	\$55.00
ATARI® 1030 Modem	\$69.95
ATARI® 850 Interface	\$119.95
ATARIWRITER® Word Processing Kit	\$39.95
SYNCALC or SYNFILE +	\$39.95
SYNTREND	\$29.95
GAMES From	\$9.95

Prices as of 12-4-84. Call for current pricing
Shipping charges add \$1-\$5 per item
FREE catalog of Atari, software and accessories

ABP, Ltd. (518) 664-4966
Box 109   or C.O.D.
Mechanicville, NY 12118

Stock Market Timing Tools
for
Atari 800 with 48K Disk Drive



indicates

- Performance Comparisons
- Uptrends and Downtrends
- 2 variable moving averages
- Overbought and Oversold Readings

AND MORE

Not a Game under \$30.00

for free info. write to:

M.A.R.K. Enterprises

P.O. BOX 83007

LOS ANGELES, CA 90083

new products


VOLKSMODEM 12 MODEM SIGNALMAN EXPRESS MODEM

(modems)

Anchor Automation, Inc.
6913 Valjean Ave.
Van Nuys, CA 91406
(818) 997-6493
\$299 (Volksmodem)
\$439 (Signalman)

Anchor's two new modems are both 300/1200 baud. The Volksmodem is a smart modem featuring autodial and auto-answering, dial tone detect, and busy detection. It requires an RS-232 interface or special cables to circumvent the Atari 850 interface.

The Express does everything the Volks-

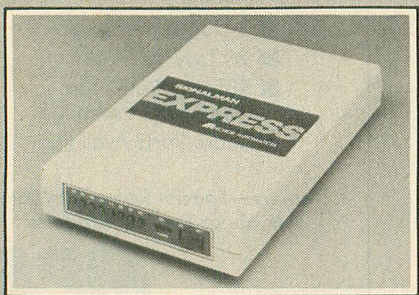

modem 12 does, but it also has a built-in speaker for audio line monitoring, volume control, configuration switches for switched phone networks, permanent phone number storage, autodial. With a full array of indicator lights, this rivals the Hayes 1200 Smartmodem in specifications.

PAPER CLIP

(word processor)

Batteries Included
17875 Sky Park North
Suite P
Irvine, CA 92714
(714) 250-8723
48K—disk
\$89.95

The highly acclaimed PaperClip word processor comes to the Atari with some spectacular new features. Batteries Included claims it will have dual window/dual file editing, auto-save for work in progress, single key saving and a print preview mode. (Psst, here's a secret for *Antic* readers. This software is apparently an expanded version of the high-powered ACTION! editor.)

SUSPECT THE HITCHHIKER'S GUIDE TO THE GALAXY

(games)

Infocom
55 Wheeler Street
Cambridge, MA 02138
(617) 492-1031
48K—disk
\$39.95 each

Suspect is Infocom's third detective thriller. In this case, you're suspected of a murder and must prove your innocence.

Don't Panic! Douglas Adams, author of the mindbogglingly funny Hitchhikers series, has written an Infocom version largely composed of new material. You play the role of Authur Dent, a hapless earthling travelling the universe following the destruction of Earth.

VPI 160 HSA 110

(accessories)

Video Peripherals Inc.
1667 West Ninth Street
Long Beach, CA 90813
(213)437-4883
VPI 160—\$7.95
HSA 110—\$5.29

The VPI is a six-foot monitor cable designed for the Atari. At one end is a DIN plug. The other end branches to a variety of RCA and mini-jacks. Also comes in gold-plated version.

According to the company, the HSA is "a gripper ball and extension stick kit" to improve your Atari joystick. It instantly improves your ability to score and reduces hand fatigue—just snap it on and play.

NEW IMPROVED MASTERTYPE

(software)

Scarborough Systems
25 N. Broadway
Tarrytown, NY, 10591
(800) 882-8222
cartridge
\$39.95

America's top typing program has been revised to include finger positioning exercises and sentence practice, as well as the original action graphics format.


CONAN LOST TOMB

(games)

Datasoft
19808 Nordhoff Place
Chatsworth, CA 91311
(818) 701-5161
48K—disk
\$39.95 (Conan)
\$34.95 (Lost Tomb)

The hero of fiction, film and comics is now a hero of software. Join Conan as he battles monsters and demons in an ancient castle.

The Lost Tomb takes you on a journey into an Egyptian tomb infested with deadly creatures and lethal traps.

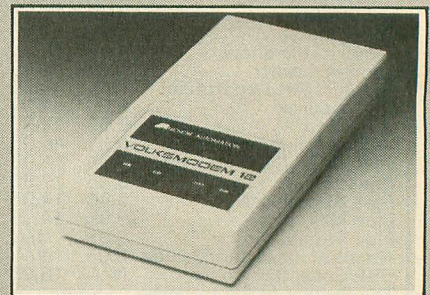

IMPERIUM GALACTUM

(game)

Strategic Simulations, Inc.
883 Stierlin Road, Bldg. A-200
Mountain View, CA 94043
(415) 964-1353
48K—disk
\$39.95

Play the computer or up to three humans as you seek to increase the power of your race among 50 star systems. You can design your own legions, negotiate with independent worlds or obliterate entire planets.

Return the favor: When you call a manufacturer or supplier about a product you've seen advertised or otherwise mentioned in ANTIC, please tell them so. This will help us to continue to bring you the latest information about products that will make your Atari computer an even more valuable investment in the future. —ANTIC ED



OSS WRITES ONLY PRECISION SOFTWARE... OUR CUSTOMERS WRITE OUR BEST ADS!

BASIC XL

"BASIC XL is a fast and powerful extension of Atari BASIC, totally compatible with virtually all software. Its many features make programming easy, especially games that require player/missile graphics. For people writing business software or translating existing programs from other computers, the new string arrays and other string-handling features make the task manageable. BASIC XL is a truly professional language that should become standard in all future Atari computers. Overall Rating—A." *The Addison-Wesley Book of Atari Software 1984*

BASIC XL SuperCartridge & Manual (Requires 16K Memory) \$79.00

ACTION!

"For those who have found BASIC to be too slow or assembler too difficult, ACTION! is the logical alternative. ACTION! programs can increase speed from 50 to 200 times that of BASIC." *Jerry White, Antic, February 1984*

ACTION! SuperCartridge & Manual (Requires 16K Memory) \$99.00

MAC/65

"For the serious machine language programmer or anyone interested in programming in 6502 machine language, this package is a must. A lot of the good professional software on the market, games or otherwise, was written using this brute. Coding machine language with anything else is like trying to swim upstream in quicksand." *ACE Of West Hartford, May 1984*

MAC/65 SuperCartridge & Manual (Requires 16K Memory) \$99.00

THE WRITER'S TOOL was designed for WRITERS who want to WRITE!

When you want to write on your Atari® Computer—a letter, a business report, or a book—you want to concentrate on writing and not on the word processor that you are using.

You want to write immediately without having to spend hours learning some fancy system or remembering complicated commands.

You want to write quickly...as fast as your imagination can fly. Then edit just as fast...correct mistakes; change, add, or delete words and phrases; rearrange the sequence of paragraphs or entire pages without fearing that one slip of your fingers might wipe-out hours of precious work.

You want to be able to save or retrieve your text files on any type of Atari compatible disk drive using either single-density or double-density disks without worrying about accidentally erasing files.

You want to be able to print out your finished piece right away, using all of your printer's capabilities such as Pica, Elite, and condensed type; print two-columns on 8½" wide paper and proportional spacing; and print different types of characters: double-width, bold-face, italics, underlined, ^{superscript}, and _{subscript}.

Compare THE WRITER'S TOOL with the others: feature for feature, dollar for dollar—if you can find a better word processor, buy it!

THE WRITER'S TOOL*

SuperCartridge, Program Disk, Tutorial & Reference Manual \$99.00
(Now Includes Spelling Checker)

*Requires an Atari® Computer with 40K memory, disk drive, and any Atari compatible printer.

ATARI® is the registered trademark of ATARI, INC.



Now Available At Your Software Dealer!

Optimized Systems Software, Inc.

1221B Kentwood Avenue, San Jose, California 95129 (408) 446-3099

Imagine...

**A WORD PROCESSING PROGRAM!
AN INFORMATION MANAGEMENT PROGRAM!
A TELECOMMUNICATIONS PROGRAM!**

ALL THREE PROGRAMS, ON ONE DISKETTE!, FOR ONLY \$49.95*!

"Quite simply the best! The highest rating possible...the package should be part of every (computer) library." — ANALOG COMPUTING

"Russ Wetmore has done an EXCELLENT job! The program is flexible, powerful and very easy to use. \$49.95 buys a heck of a lot of program." — REVIEW BY ARTHUR LEYENBERGER

"Performance: ★ ★ ★ ★ (Excellent) Value: ★ ★ ★ ★ (Excellent)

This three-in-one package is a bargain... one of the finest values on the market."

— FAMILY COMPUTING


HOMETEXT WORD PROCESSOR.
HOMEFIND INFORMATION MANAGER.
HOMETERM TELECOMMUNICATIONS

Together they are **HomePak**: the three most important and most useful home computer applications in one integrated system — on one diskette!

The reviewers are unanimous: any one of these programs **alone** is well worth the price. So you're getting **three times the computing power**, with this exceptionally easy to use package:

- all commands in simple English; no complex computer jargon, no obscure instructions
- all key commands are immediately available on the screen menu; additional commands can be called up for the more experienced user
- to help you, system status is displayed right on the screen

And it's easy to use the three programs together. For example, in the "Merge" mode, you can take data stored in **HOMEFIND** and print letters and labels using **HOMETEXT**. Or, use **HOMETEXT** to write reports based on information you've called up via **HOMETERM**.

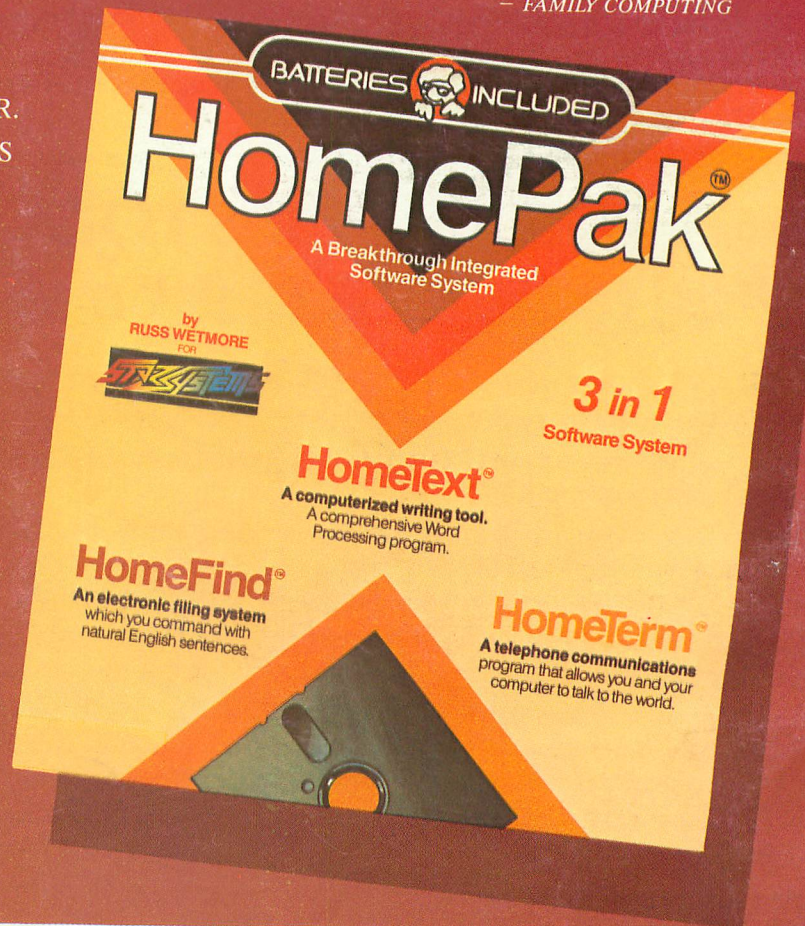

BATTERIES INCLUDED



"The Energized Software Company!"

WRITE FOR A FULL COLOR BROCHURE

*MANUFACTURERS SUGGESTED U.S. LIST PRICE.

30 Mural Street
Richmond Hill, Ontario
L4B 1B5 Canada
(416) 596-1405
Telex: 06-21-8290

17875 Sky Park North
Suite P, Irvine, California
USA 92714
Telex: 509-139

EACH COMPUTER SYSTEM MAY REQUIRE ACCESSORY DEVICES SUCH AS MODEMS, PRINTERS OR CARDS TO UTILIZE SPECIFIC FEATURES OF HOMEPAK. SEE YOUR DEALER FOR DETAILS.

©1984 BATTERIES INCLUDED. ATARI, APPLE, COMMODORE AND IBM ARE REGISTERED TRADEMARKS OF ATARI CORP., APPLE INC., COMMODORE BUSINESS MACHINES' AND IBM BUSINESS MACHINES INC., RESPECTIVELY.